

WE WALK ALONGSIDE THE WORLD
Stock Code: 300415

YIZUMI伊之密

Designed by Yizumi, December 2022



**FF Series Electric
Injection Molding Machine**
(90T-1380T)

Yizumi Precision Molding Technology Co., Ltd.

Address: No.12 Shunchang Road, Shunde, Foshan, Guangdong 528300, China
TEL:86-757-2921 9800 86-757-2926 5150(overseas) www.yizumi.com

Disclaimer:

1. YIZUMI reserves the right to modify the product description in the catalogue. Specification might be changed without prior notice.
- 2.The picture in the catalogue is for reference only. The real object should be considered as final.
- 3.The data in the catalogue is obtained from internal testing in YIZUMI laboratory.
Please refer to the actual machine for the final data. YIZUMI reserves the right of final interpretation upon disputes and ambiguities.





About FF Series

Development Background

Upgrade of industry and product

While the industrial upgrading in China requires high-quality, high-precision, and high-efficiency equipment, the end users demand products with higher quality, better appearance, and more reliability.

Strong customer base

With the in-depth understanding of customer pain points and demand which based on tens of thousands of customers over time, we have set up a professional team to develop more cost-effective electric injection molding machines.

Times call for domestically manufactured alternatives

While the Japanese products dominate the market at present, customers desire to have domestically manufactured alternatives to the imports for a more prompt comprehensive support and the best value for money.

Automation and intellectualization are the trends

The growing demands for industrial automation and intellectualization ask for better products to increase customer value. Yizumi responds to this need with the new generation FF series electric injection molding machines.

Core value Proposition

Yizumi is committed to developing a product that meets the technology and quality standards of Japanese electric injection molding machines, provides more cost-effective experiences, and better fulfills customers' expectations of return on investment.

Upgrade from conventional models

Upgrading to a level that has higher requirements than conventional machines and allows customers to easily realize the automation and intellectualization while improving quality consistency and efficiency.

Upgrade to meet application requirements

Compared to conventional models, the new electric series of injection molding machines enhances the performance in all aspects to meet the optimized requirements (e.g. Thickness, precision, and complexity) of more stringent core elements of products.

Critical Success Factors

Warranted by the overall strength of Yizumi

Yizumi has the powerful capacity in HW/SW development, competent R&D teams, and rigorous quality control system.

Advanced integrated project development (IPD) process assurance

The rigorous and comprehensive IPD process established based on the in-depth understanding of customer needs and pain points ensures a high degree of customer satisfaction.

In-depth industrial know-how and collaboration

With years of accumulated knowledge in machine designs, Yizumi is committed to creating the electric injection molding machines that meet our customer's product needs through collaboration with international top-level expert teams.

FF Series Electric Injection Molding Machine

Three Major Customer Value Propositions:

 Stability & Precision

 Efficiency & energy saving

 Automation & Intellectualization

Yizumi is committed to developing a product that meets the technology and quality standards of Japanese electric injection molding machines, provides more cost-effective experiences, and better fulfills customers' expectations of return on investment. Upgrading to a level that has higher requirements than conventional machines and allows customers to easily realize the automation and intellectualization while improving quality consistency and efficiency. Performance improvement in all aspects in comparison with conventional models to meet the optimized requirements (e.g. Thickness, precision, and complexity) of more stringent core elements of products.



※The data above are derived from Yizumi's lab results and are for your reference only;

Three Major Customer Value Propositions

Stability & Precision:

► High stability of the Tie-Bar Free (TBF) technology

Contact-free tie bars allow fast and stable mold opening/closing and significantly reduce energy consumption, causing no pollution to the work environment

► Highly stable three linear guider support (TLGS) technology

High precision linear guide supports significantly reduce the friction of the plasticizing unit and improves the pressure stability of plasticizing and injection, resulting in stable product quality. In the meantime, the linear guide effectively reduces energy consumption and enhances the smoothness of mold opening/closing

► High-precision sensor technology

The use of the world's leading position sensors with 2 million CPR resolution delivers incredible stability in position and speed control

► Fully automatic lubrication system

While the lubricating grease works as the blood of injection molding machine, the fully automatic maintenance-free lubrication system ensures the long-term operation stability of the machine

Excellent injection stability

More accurate control for more stable and reliable molding precision. The stability precision of injection pressure and holding pressure is at $\pm 0.1\text{Mpa}$

Efficiency & Energy saving:

► Double the injection speed

Compared with conventional machines, doubling the injection speed does more than shortening the injection time. It brings more possibilities to product design and allows customers to enjoy greater flexibility in terms of wall thickness, sprue size and precision of the molded parts

► Energy-saving

Servo motors and high-efficiency transmission ensure good energy utilization of the equipment. Compared with ordinary injection molding machines, it can save energy by 30-50% (varies according to working conditions);

► Increase mold opening and closing speed by 50%

Dry cycle has a great importance to customers as the faster dry cycle results in higher productivity

► Multi-axis synchronization

As the mold opening/closing, injection, plasticizing, and ejection are driven by separate motors, the easy synchronization of processes reduces the cycle time of the production

► Plasticizing speed is significantly increased

The increase in plasticizing speed reduces the cycle time while delivering enhanced production stability

► High-rigid design of moving platen

Provide good rigidity and uniform force distribution with platen parallelism $\leq 0.03\text{mm}$, suitable for injection molding machines

► Highly stable clamping unit

Fast and steady mold opening/closing speed. Repeatability of mold opening/closing positions $\pm 0.03\text{mm}$



Automation & Intellectualization:

► Optimized automation interface for centralized control of integrated robot, hot runner, and auxiliary

► SMART mold protection to ensure the safe use of high-value molds in an unmanned operating environment

► The high stability and consistency of the machine process parameters allow unattended operation for an extended time

► Full data monitoring and extraction provide a solid foundation for intellectualization

► With accurate mold opening and full-featured second mold closing and opening, the automation of special process is fully warranted

► The intelligent sorting system automatically removes defect parts to ensure the production quality


► Combined with MEC, the intelligent Statistics Process Control (SPC) helps to achieve automation and informationization

► Smart Clamping Force Management (SCFM) system

► Smart Injection Control (SIC)

► Integrated factory management system with Yi CMS + Yi MES

Clamping Unit

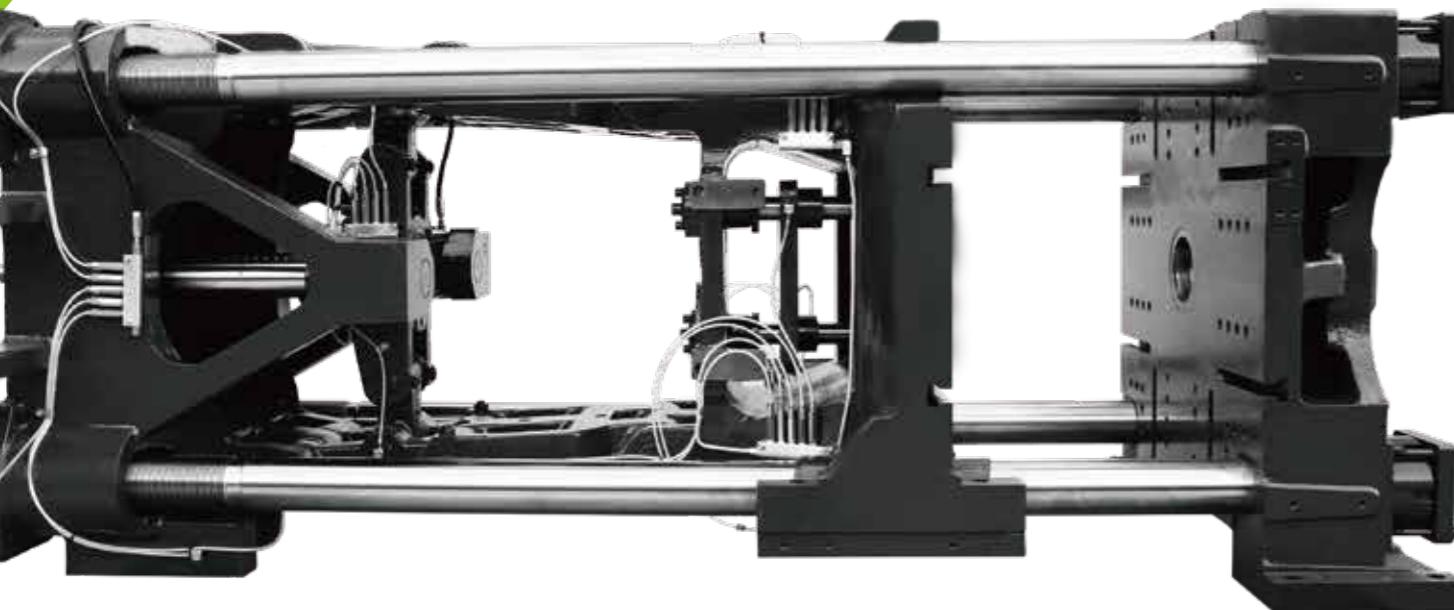


High stability of the TBF technology

- ▶ The clamping unit adopts the TBF (Tie Bar Free) technology for easy operation and maintenance
- ▶ Keep the mold area clean to prevent product contamination



Linear rail moving design for mold opening/closing

- ▶ The directional accuracy reaches **0.02mm**
- ▶ Fast and steady mold opening/closing speed. Repeatability of mold opening/closing positions **$\pm 0.03mm$**

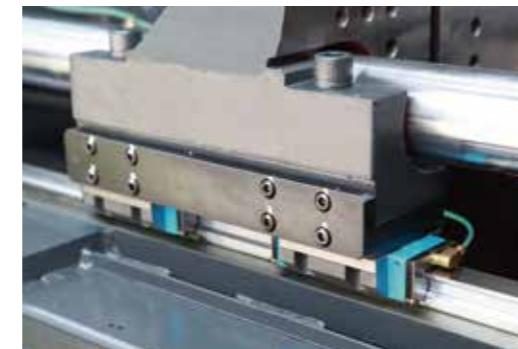


High-rigid design of moving platen

- ▶ Offer great rigidity and uniform distribution of force
- ▶ Suitable for injection molding with precision molds
- ▶ High repeatability of mold-open end position
- ▶ Platen parallelism (with load) **$\leq 0.05mm$** (FF90-240)
- ▶ Platen parallelism (with load) **$\leq 0.08mm$** (FF300-400)
- ▶ Faster dry cycle




Dual-cylinder parallel ejection design

- ▶ Uniform force application for mold release
- ▶ Servo motor driven ejection is optional
- ▶ Can achieve functions such as various modes of synchronized ejection and ejector retraction, gate cutting inside the mold, etc.
- ▶ Accuracy of ejection position up to **0.2mm**, conducive to product accuracy and repeatability.

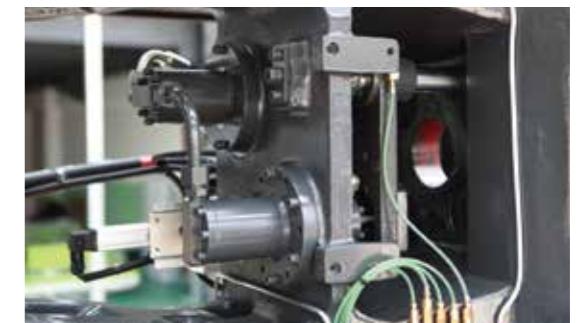


Unique “SMART” mold protection feature

- ▶ Can detect very small obstacles and resistance
- ▶ Reduce the extent of mold damage when there are foreign objects in the mold cavity or faulty operation occurs

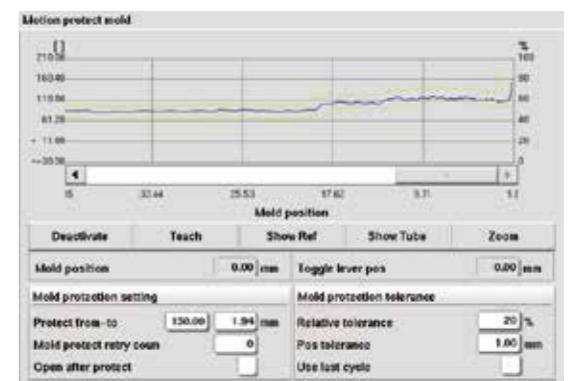

Injection Unit

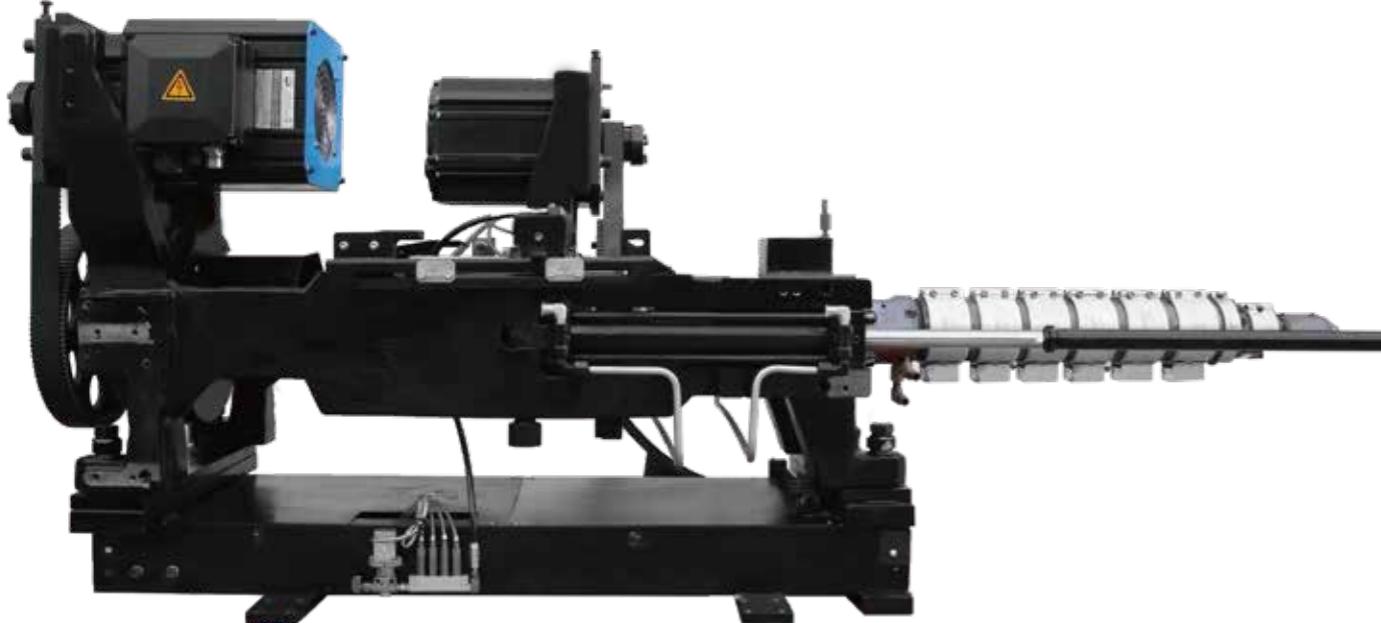

The use of advanced LGS (Linear Guide Support) technology

- ▶ Integrated design enhances the overall rigidity of the injection unit
- ▶ No unnecessary friction. Fast forward and backward




Dedicated screws for different materials

- ▶ DIN standards for barrel unit size, processing accuracy, surface finish, and material selection
- ▶ Increase the repeatability of injection



Temperature closed loop control

- ▶ Static deviation: $\pm 0.5^\circ$

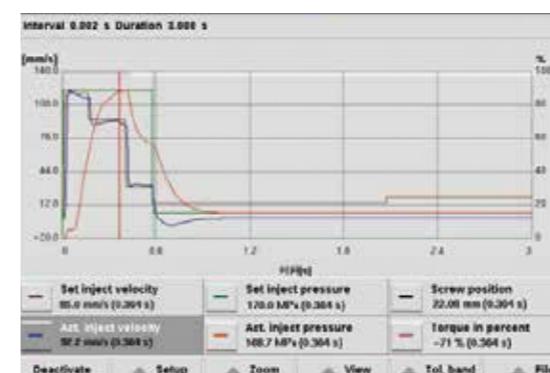

Closed loop injection pressure control technology

- ▶ Provide more accurate control for more stable, reliable and precise molding.
- ▶ The stability precision of injection pressure and holding pressure is at ± 0.1 MPa

Electrical Control System

Using European KEBA2000 Controller


- The powerful system is easy to operate and ideal for the high-performance solutions for electric injection molding machines
- 12-inch/15-inch HD color touchscreen display with clear and neat screen layout
- Standard Process quality control (PDP), and Statistical process control (SPC) features
- Auto-sorting function
- Oscilloscope with chart display function to record the curve of process data change
- Centralized (networked) real-time remote operation and control
- The flexible I/O expansion modules allow integration of more features as needed and are programmable



- Advanced HW and SW systems to support Industry 4.0
- 1ms scan cycle
- 16 levels of user access management to ensure data security

Unique servo direct control (SDC) technology

- Process algorithm independently developed by Yizumi for the servo drive
- Four servo motors control injection, plasticizing, clamping, and ejection independently, allowing faster feedback, more responsive control, and improved control accuracy
- More precise control of speed, position and pressure to meet the requirements of precision equipment

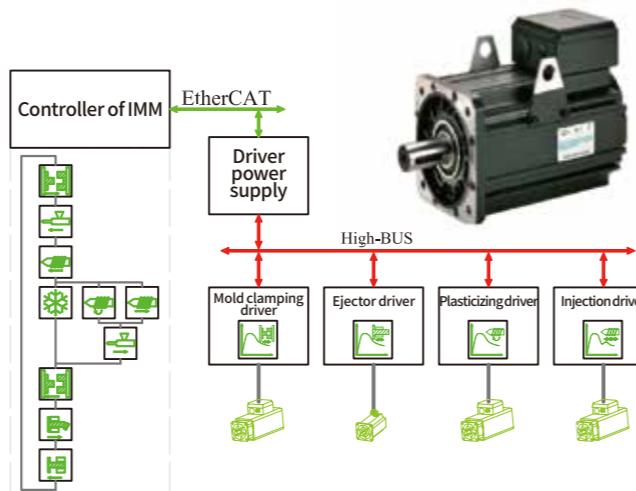

All-metal baseboard for the electric control unit

- Galvanized mounting plate for better cooling and anti-interference capacity

Standardized wiring layout

- Neat wiring and standardized interface layout for easy operation

Modular Injection Unit Selections

The modular injection unit allows flexible combination with a number of options to quickly meet various application needs:

- 90T~1380T clamping force, 13 clamping modes
- 13 injection unit configurations, screws range $\Phi 22\sim\Phi 116\text{mm}$
- Each clamping mode has the option to select different injection units and 9 types of barrel units
- Cover injection speeds of 160/200/300/350 (mm/s)

Machine \ Screw	Injection unit	IU170	IU200	IU320	IU430	IU670	IU930	IU1350	IU1930	IU2700	IU3700	IU4800	IU6800	IU9000
FF90		22,26,30	26,30,35											
FF120			26,30,35	30,35,40	35,40,43									
FF160				30,35,40	35,40,43	40,48,53								
FF200					35,40,43	40,48,53	48,53,60							
FF240						40,48,53	48,53,60	53,60,68						
FF300							48,53,60	53,60,68	60,68,76					
FF380								53,60,68	60,68,76	68,76,84				
FF460									60,68,76	68,76,84	76,84,92			
FF550										53,60,68	60,68,76	68,76,84	76,84,92	
FF650											60,68,76	68,76,84	76,84,92	84,92,100
FF850												68,76,84	76,84,92	84,92,100
FF1080													76,84,92	84,92,100
FF1380														92,100,108,116
														76,84,92
														100,108,116



3C products



Automotive parts



Medical consumables




Home appliances

FF90

CLAMPING UNIT							
Clamping force	kN	900					
Mold opening/closing stroke	mm	320					
Space between tie bars	mm	420×420					
Mold thickness	mm	150-410					
Ejector stroke	mm	80					
Ejector force	kN	22.6					
Number of ejectors		5					
INJECTION UNIT							
Model of injection unit		IU170 / IU170h		IU200 / IU200h			
International specification		165		198			
	A	B	C	A	B	C	
Screw diameter	mm	22	26	30	26	30	35
Screw L/D ratio		22	22	22	22	22	20
Screw stroke	mm	115			140		
Stroke-bore ratio		5.23	4.42	3.83	5.4	4.7	4.0
Shot volume	cm ³	44	61	81	74	99	135
Shot weight (PS)	g	40	56	75	68	91	124
Injection pressure	MPa	377	270	203	266	200	147
Holding pressure	MPa	302	216	162	213	160	118
Injection speed (Std./Opt.)	mm/s	200/350			200/350		
Injection rate	cm ³ /s	70	98	130	98	130	177
Screw speed	rpm	400			400		
Nozzle contact force	kN	20			20		
Heating power	kW	4.9	5.9	7.5	5.9	7.5	7.9
Total power	kW	35.5/36.7			35.5/37.9		
Total current	A	59.9/61.9			60/64		
GENERAL UNIT							
Oil pump motor	kW	10					
Max. system pressure	Mpa	16					
System flow	L/min	50					
Oil tank capacity	L	106					
Machine weight	kg	4030			4040		


※The Data above were acquired by testing in the factory, only for your reference.

FF90 Machine Dimensions

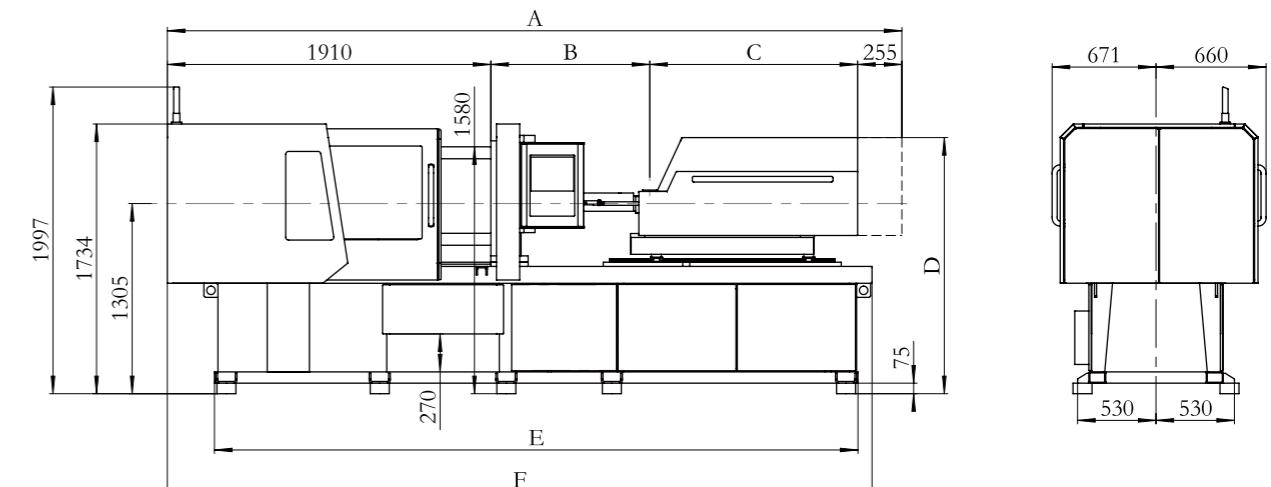

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU170	4053/4148/4254	626/721/827	1262	1772	4185	4580
IU200	4148/4254/4313	721/827/886				

FF90 Platen Dimensions

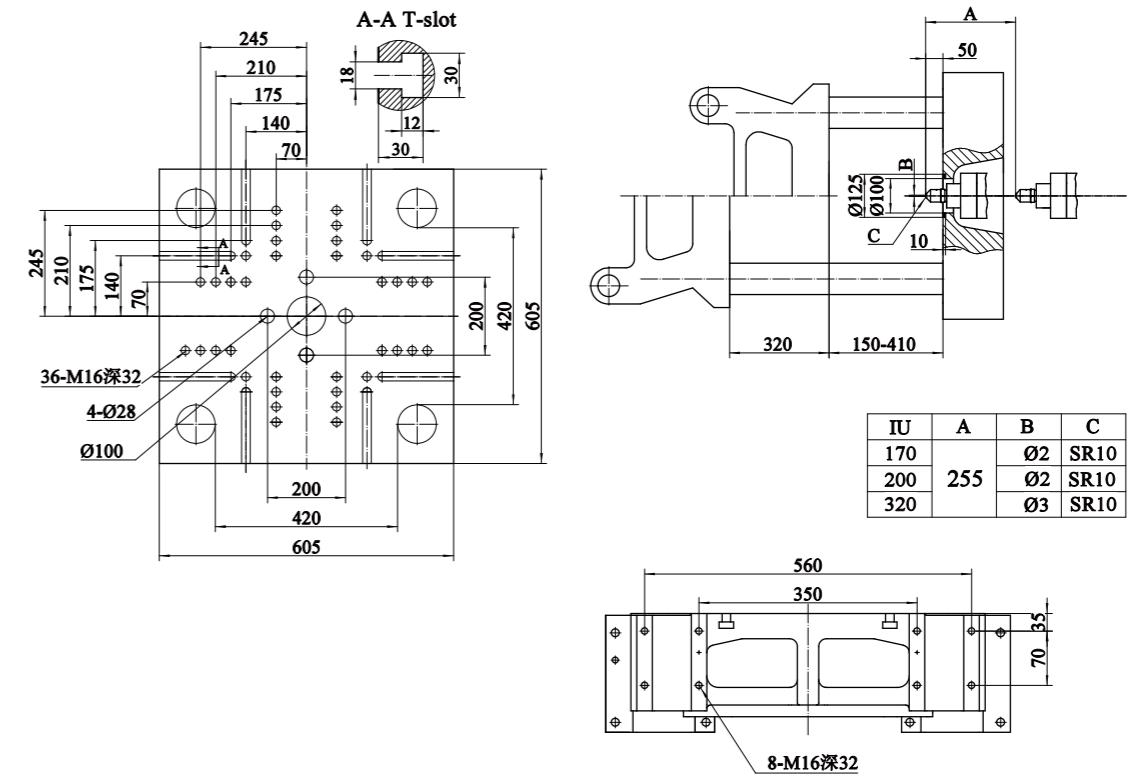


FF120

CLAMPING UNIT														
Clamping force	kN	1200												
Mold opening/closing stroke	mm	370												
Space between tie bars	mm	480×480												
Mold thickness	mm	150-480												
Ejector stroke	mm	100												
Ejector force	kN	40												
Number of ejectors		5												
INJECTION UNIT														
Model of injection unit		IU200 / IU200h			IU320 / IU320h		IU430 / IU430h							
International specification		198			318		428							
		A	B	C	A	B	C	A	B					
Screw diameter	mm	26	30	35	30	35	40	35	40					
Screw L/D ratio		22	22	20	24	20	20	24	20					
Screw stroke	mm	140			165			170						
Stroke-bore ratio		5.4	4.7	4.0	5.5	4.7	4.1	4.9	4.3					
Shot volume	cm ³	74	99	135	117	159	207	164	214					
Shot weight (PS)	g	68	91	124	107	146	191	150	197					
Injection pressure	MPa	266	200	147	272	200	153	261	200					
Holding pressure	MPa	213	160	118	218	160	123	209	160					
Injection speed (Std./Opt.)	mm/s	200/350			200/350			200/300						
Injection rate	cm ³ /s	98	130	177	130	177	231	177	231					
Screw speed	rpm	400			400			400						
Nozzle contact force	kN	20			30			40						
Heating power	kW	5.9	7.5	7.9	7.3	7.9		8.9						
Total power	kW	35.5/37.9			36.4/52.4			48/56.9						
Total current	A	60/64			61.4/88.4			81/96						
GENERAL UNIT														
Oil pump motor	kW	10												
Max. system pressure	Mpa	16												
System flow	L/min	50												
Oil tank capacity	L	106												
Machine weight	kg	4800			4940			5400						


※The Data above were acquired by testing in the factory, only for your reference.

FF120 Machine Dimensions

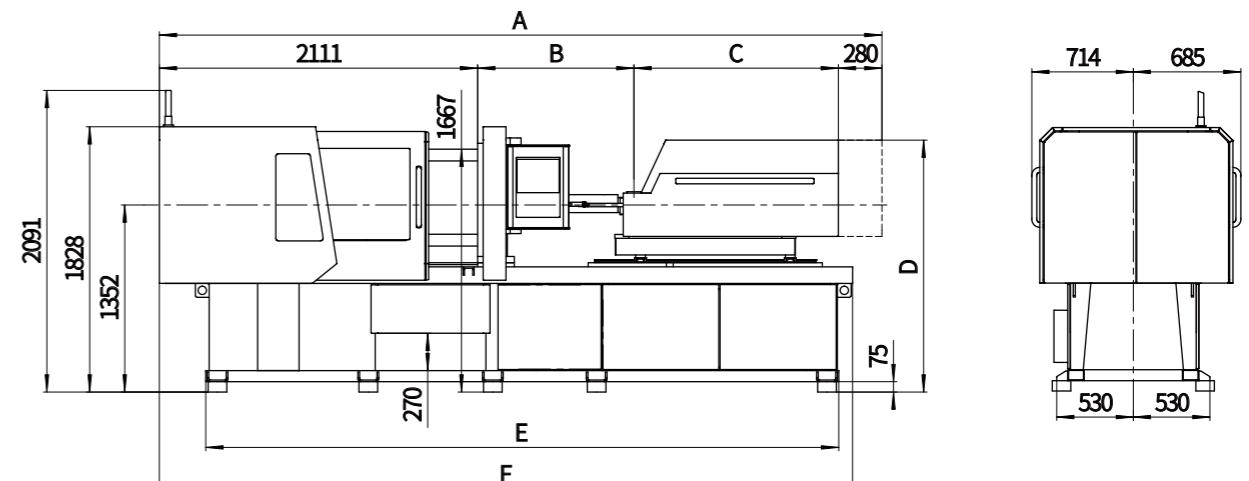

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU200	4375/4481/4540	721/827/886	1263	1820		
IU320	4735/4735/4810	866/866/941	1478		4386	4821
IU430	4853	1007	1455	1822		

FF120 Platen Dimensions

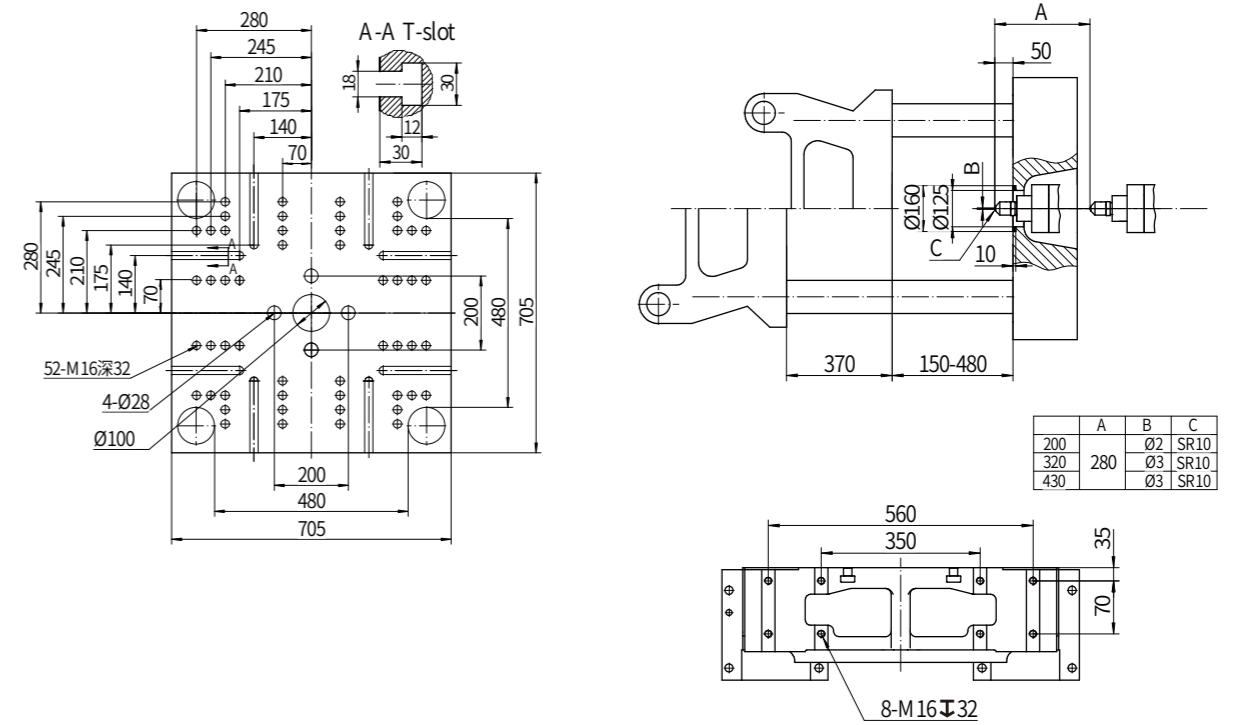


FF160


CLAMPING UNIT														
Clamping force	kN	1600												
Mold opening/closing stroke	mm	430												
Space between tie bars	mm	530×530												
Mold thickness	mm	175-520												
Ejector stroke	mm	125												
Ejector force	kN	40												
Number of ejectors		5												
INJECTION UNIT														
Model of injection unit		IU320 / IU320h			IU430 / IU430h		IU670 / IU670h							
International specification		318			428		668							
		A	B	C	A	B	C	A	B					
Screw diameter	mm	30	35	40	35	40	43	40	48					
Screw L/D ratio		24	20	20	24	20	20	22.3	20					
Screw stroke	mm	165			170			205						
Stroke-bore ratio		5.5	4.7	4.1	4.9	4.3	4.0	5.1	4.3					
Shot volume	cm ³	117	159	207	164	214	247	258	371					
Shot weight (PS)	g	107	146	191	150	197	227	237	341					
Injection pressure	MPa	272	200	153	261	200	173	259	180					
Holding pressure	MPa	218	160	123	209	160	138	207	144					
Injection speed (Std./Opt.)	mm/s	200/350			200/300			160/250						
Injection rate	cm ³ /s	130	177	231	177	231	267	185	266					
Screw speed	rpm	400			400			350						
Nozzle contact force	kN	30			40			40						
Heating power	kW	7.3	7.9		8.9		10.6	10.9	12.1					
Total power	kW	36.4/52.4			48/56.9			55.1/61						
Total current	A	61.4/88.4			81/96			93/103						
GENERAL UNIT														
Oil pump motor	kW	10												
Max. system pressure	Mpa	16												
System flow	L/min	50												
Oil tank capacity	L	106												
Machine weight	kg	5850		6300		6380								

※The Data above were acquired by testing in the factory, only for your reference.

FF160 Machine Dimensions

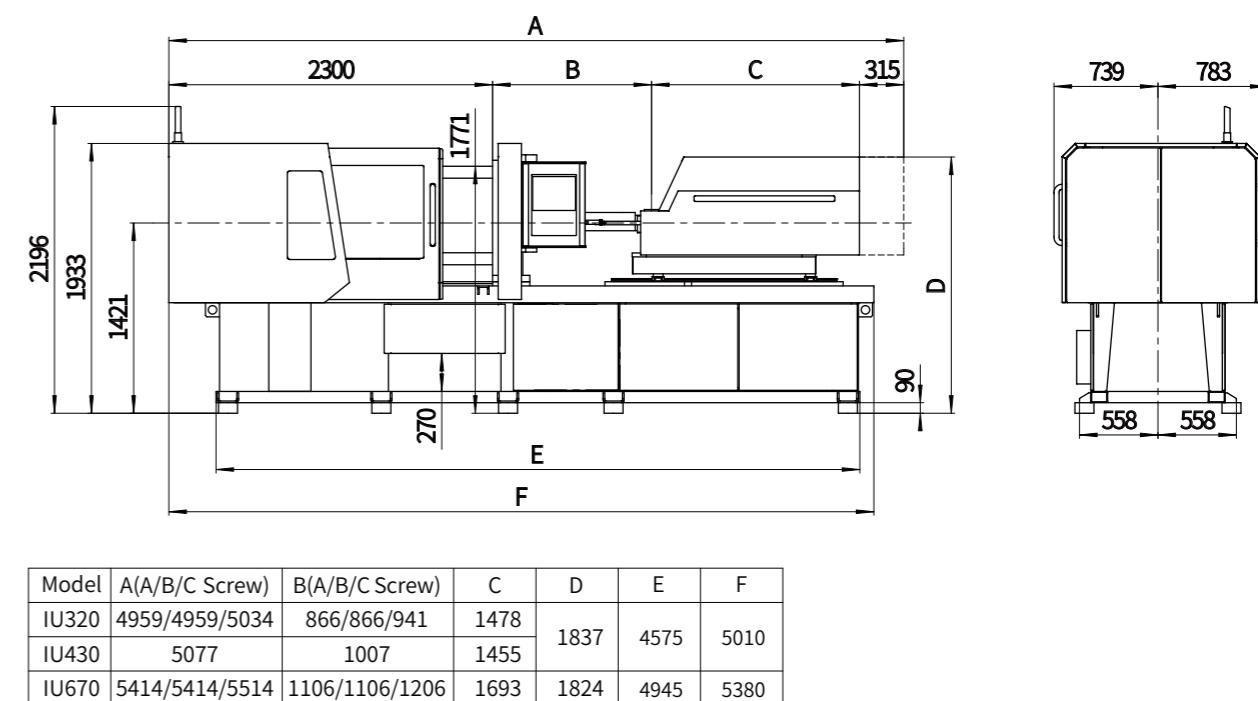

FF160 Platen Dimensions

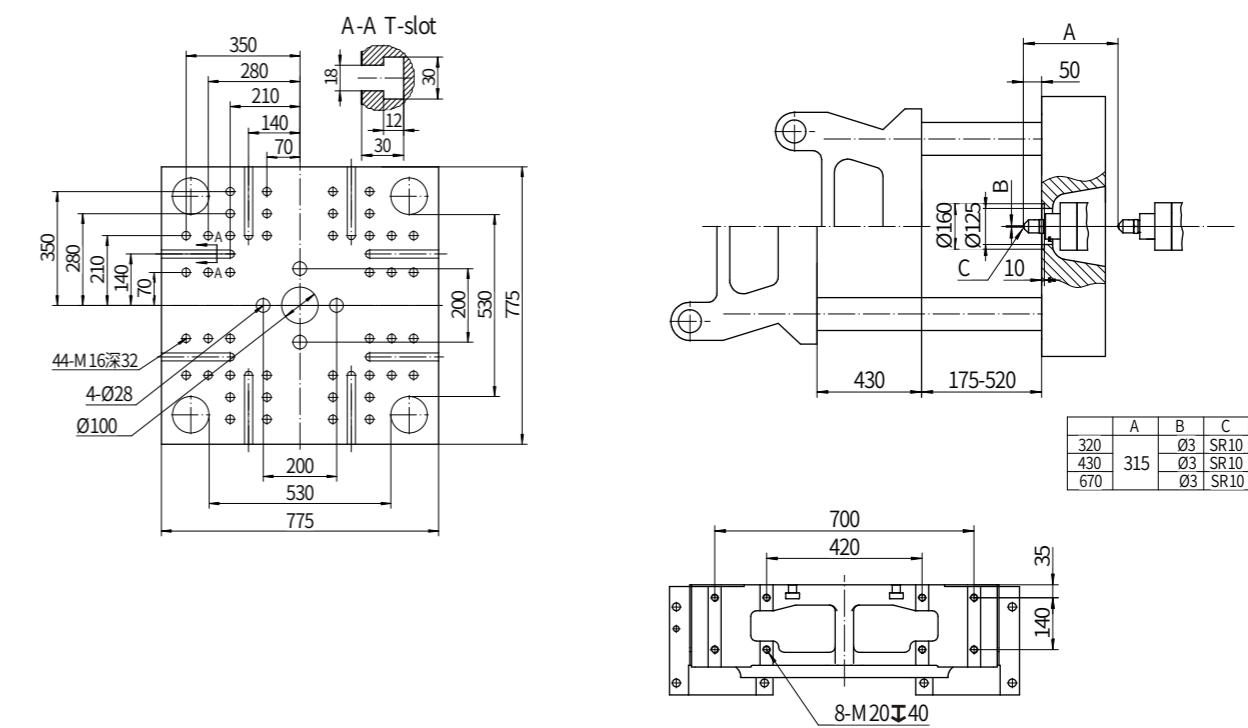


FF200


CLAMPING UNIT														
Clamping force	kN	2000												
Mold opening/closing stroke	mm	480												
Space between tie bars	mm	580×580												
Mold thickness	mm	200-560												
Ejector stroke	mm	125												
Ejector force	kN	40												
Number of ejectors		9												
INJECTION UNIT														
Model of injection unit		IU430 / IU430h			IU670 / IU670h		IU930							
International specification		428			668		933							
		A	B	C	A	B	C	A	B					
Screw diameter	mm	35	40	43	40	48	53	48	53					
Screw L/D ratio		24	20	20	22.3	20	20	22	20					
Screw stroke	mm	170			205			235						
Stroke-bore ratio		4.9	4.3	4.0	5.1	4.3	3.9	4.9	4.4					
Shot volume	cm ³	164	214	247	258	371	452	425	518					
Shot weight (PS)	g	150	197	227	237	341	416	391	477					
Injection pressure	MPa	261	200	173	259	180	148	219	180					
Holding pressure	MPa	209	160	138	207	144	118	176	144					
Injection speed (Std./Opt.)	mm/s	200/300			160/250			160						
Injection rate	cm ³ /s	177	231	267	185	266	325	266	325					
Screw speed	rpm	400			350			320						
Nozzle contact force	kN	40			40			60						
Heating power	kW	8.9			10.6	10.9	12.1	13.6	16.7					
Total power	kw	48/56.9			55.1/61			68.1						
Total current	A	81/96			93/103			114.9						
GENERAL UNIT														
Oil pump motor	kW	10												
Max. system pressure	Mpa	16												
System flow	L/min	50												
Oil tank capacity	L	106												
Machine weight	kg	6730		6810		7450								

※The Data above were acquired by testing in the factory, only for your reference.

FF200 Machine Dimensions

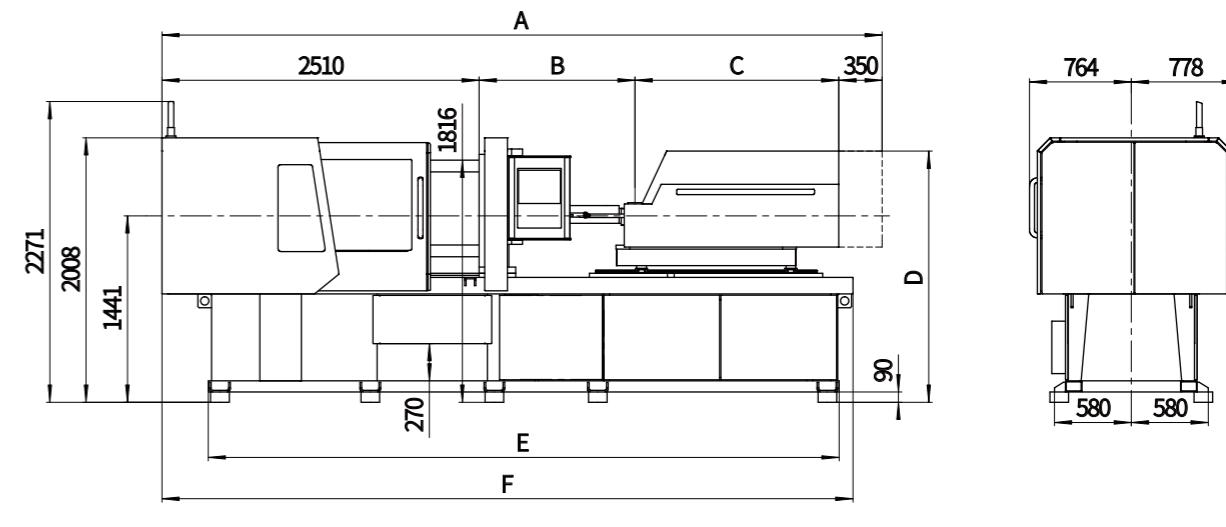

FF200 Platen Dimensions

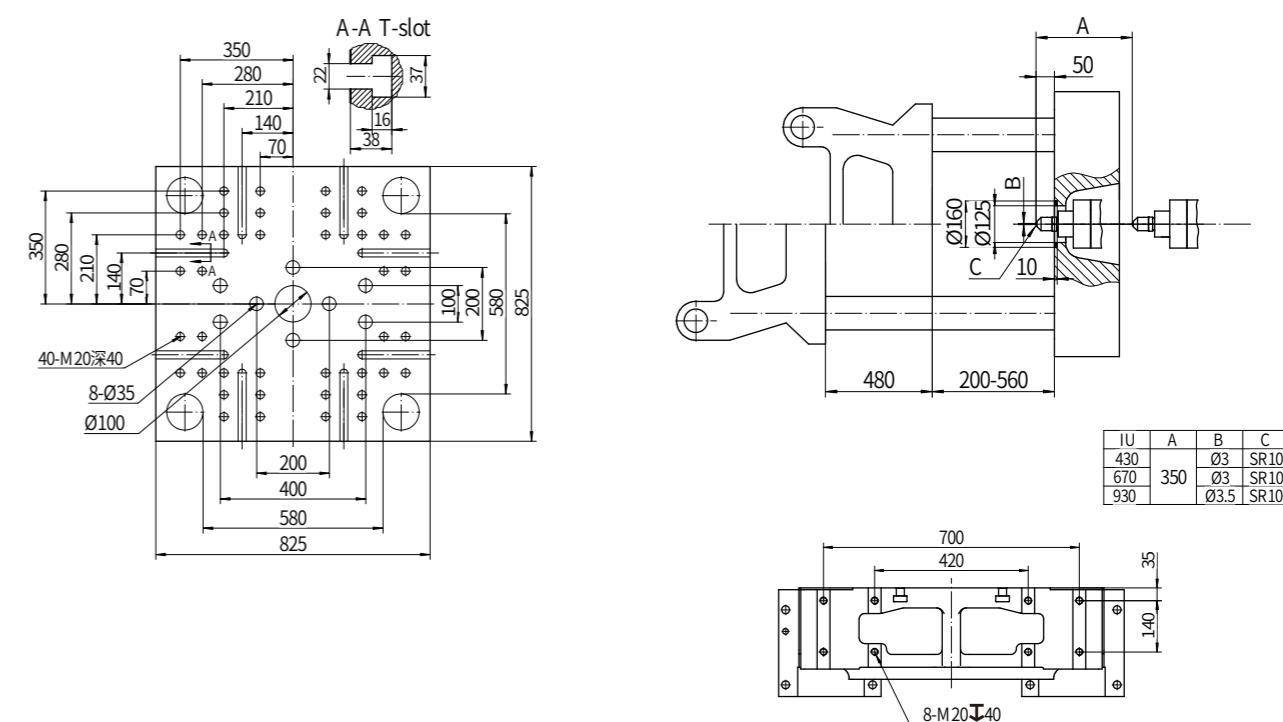


FF240

CLAMPING UNIT														
Clamping force	kN	2400												
Mold opening/closing stroke	mm	530												
Space between tie bars	mm	630×630												
Mold thickness	mm	220-600												
Ejector stroke	mm	150												
Ejector force	kN	55.6												
Number of ejectors		13												
INJECTION UNIT														
Model of injection unit		IU670 / IU670h			IU930		IU1350							
International specification		668			933		1349							
		A	B	C	A	B	C	A	B					
Screw diameter	mm	40	48	53	48	53	60	53	60					
Screw L/D ratio		22.3	20	20	22	20	20	22.6	20					
Screw stroke	mm	205			235			265						
Stroke-bore ratio		5.1	4.3	3.9	4.9	4.4	3.9	5.0	4.4					
Shot volume	cm ³	258	371	452	425	518	664	585	749					
Shot weight (PS)	g	237	341	416	391	477	611	538	689					
Injection pressure	MPa	259	180	148	219	180	140	231	180					
Holding pressure	MPa	207	144	118	176	144	112	185	144					
Injection speed (Std./Opt.)	mm/s	160/250			160			160						
Injection rate	cm ³ /s	185	266	325	266	325	416	325	416					
Screw speed	rpm	350			320			300						
Nozzle contact force	kN	40			60			60						
Heating power	kW	10.6	10.9	12.1	13.6	16.7	16.4	18.8						
Total power	kw	55.1/61			68.1			72.9						
Total current	A	93/103			114.9			123						
GENERAL UNIT														
Oil pump motor	kW	15												
Max. system pressure	Mpa	17.5												
System flow	L/min	64												
Oil tank capacity	L	106												
Machine weight	kg	9200			9840		10950							


*The Data above were acquired by testing in the factory, only for your reference.

FF240 Machine Dimensions

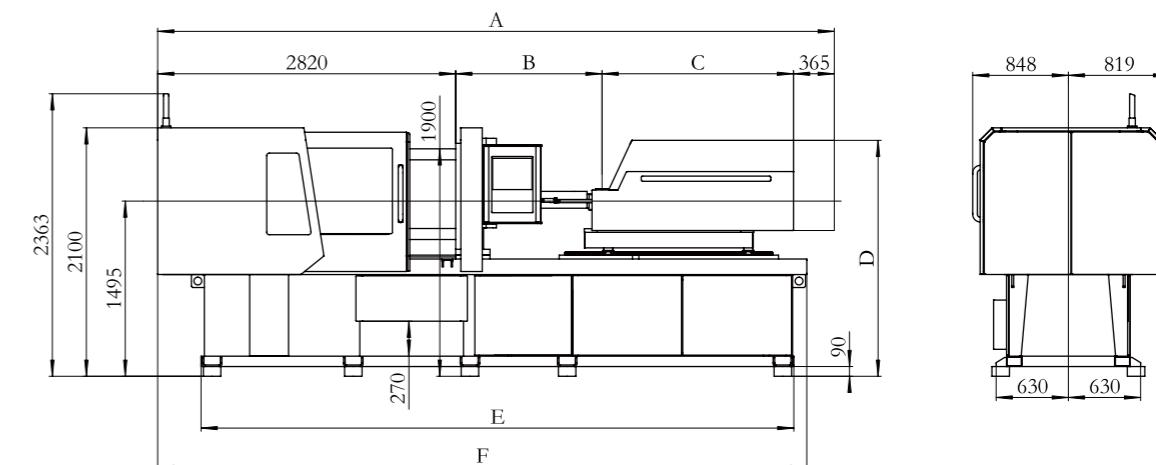

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU670	5924/5984/6084	1146/1106/1206	1693	1962	5705	6190
IU930	6274/6274/6418	1219/1219/1363	1870	2075		
IU1350	6799/6799/6959	1391/1391/1551	2223	2110	6335	6820

FF240 Platen Dimensions

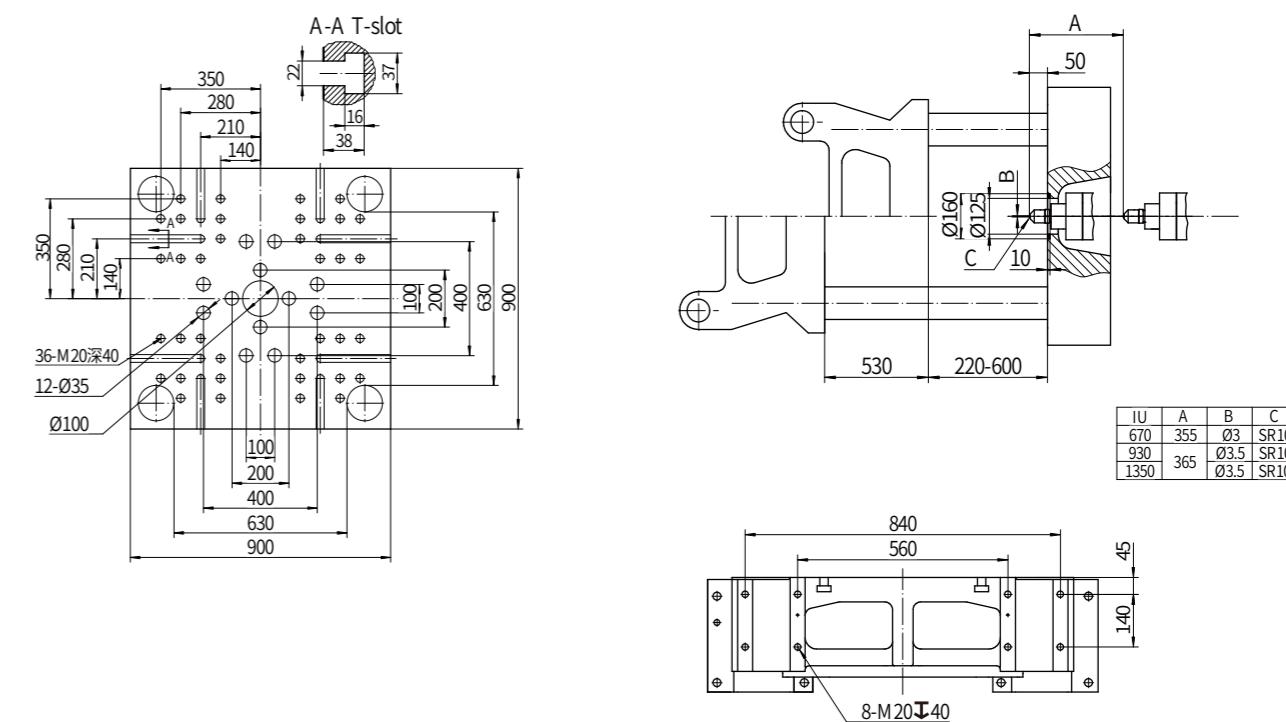


FF300

CLAMPING UNIT														
Clamping force	kN	3000												
Mold opening/closing stroke	mm	610												
Space between tie bars	mm	720×720												
Mold thickness	mm	250-650												
Ejector stroke	mm	150												
Ejector force	kN	55.6												
Number of ejectors		13												
INJECTION UNIT														
Model of injection unit		IU930			IU1350		IU1930							
International specification		933			1349		1928							
		A	B	C	A	B	C	A	B					
Screw diameter	mm	48	53	60	53	60	68	60	68					
Screw L/D ratio		22	20	20	22.6	20	20	22.6	20					
Screw stroke	mm	235			265			295						
Stroke-bore ratio		4.9	4.4	3.9	5.0	4.4	3.9	4.9	4.3					
Shot volume	cm ³	425	518	664	585	749	962	834	1071					
Shot weight (PS)	g	391	477	611	538	689	885	767	986					
Injection pressure	MPa	219	180	140	231	180	140	231	180					
Holding pressure	MPa	176	144	112	185	144	112	185	144					
Injection speed (Std./Opt.)	mm/s	160			160			160						
Injection rate	cm ³ /s	266	325	416	325	416	535	416	535					
Screw speed	rpm	320			300			250						
Nozzle contact force	kN	60			60			60						
Heating power	kW	13.6	16.7	16.4	18.8	22.2	23.5							
Total power	kw	68.1			72.9			126.2						
Total current	A	114.9			123			213						
GENERAL UNIT														
Oil pump motor	kW	15												
Max. system pressure	Mpa	17.5												
System flow	L/min	64												
Oil tank capacity	L	106												
Machine weight	kg	11370		12480		12900								


*The Data above were acquired by testing in the factory, only for your reference.

FF300 Machine Dimensions

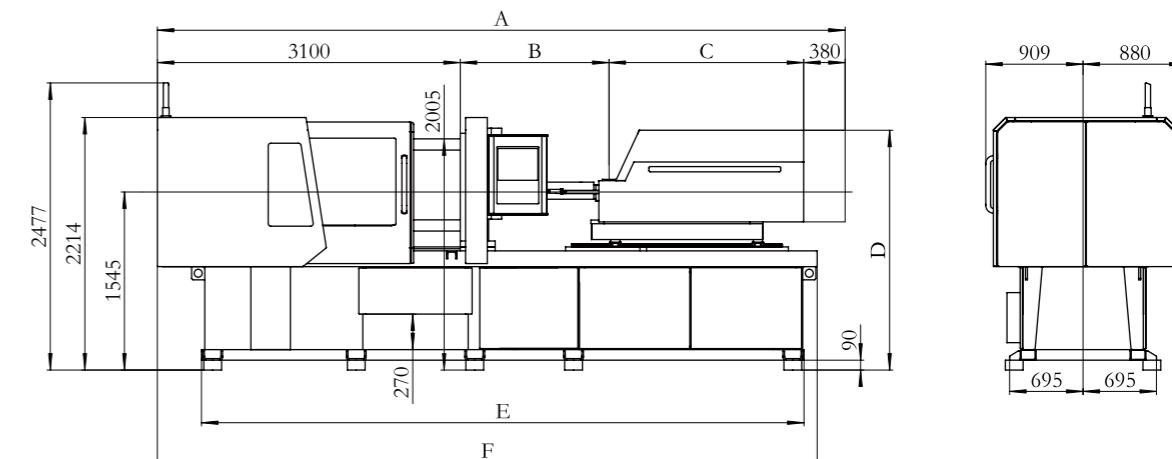

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU930	6569/6569/6713	1219/1219/1363	1870	2125	6445	7010
IU1350	7094/7094/7254	1391/1391/1551	2223	2160	6445	7010
IU1930	7085/7085/7260	1565/1565/1740	2040	2270	6445	7010

FF300 Platen Dimensions

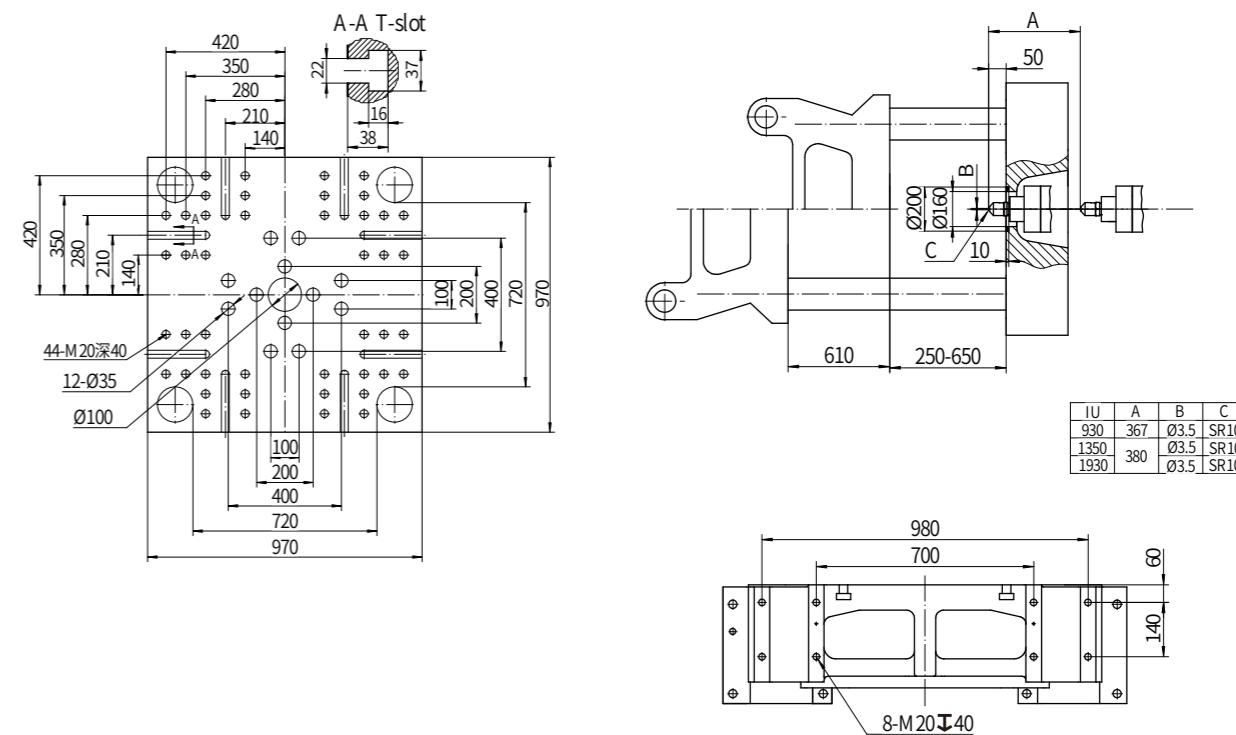


FF380

FF380 Machine Dimensions


CLAMPING UNIT														
Clamping force	kN	3800												
Mold opening/ closing stroke	mm	710												
Space between tie bars	mm	820×820												
Mold thickness	mm	290-720												
Ejector stroke	mm	200												
Ejector force	kN	99												
Number of ejectors		13												
INJECTION UNIT														
Model of injection unit		IU1350			IU1930			IU2700						
International specification		1349			1928			2695						
		A	B	C	A	B	C	A	B	C				
Screw diameter	mm	53	60	68	60	68	76	68	76	84				
Screw L/D ratio		22.6	20	20	22.6	20	20	22.3	20	20				
Screw stroke	mm	265			295			330						
Stroke-bore ratio		5.0	4.4	3.9	4.9	4.3	3.9	4.9	4.3	3.9				
Shot volume	cm ³	585	749	962	834	1071	1338	1198	1497	1829				
Shot weight (PS)	g	538	689	885	767	986	1231	1103	1377	1682				
Injection pressure	MPa	231	180	140	231	180	144	225	180	147				
Holding pressure	MPa	185	144	112	185	144	115	180	144	118				
Injection speed (Std./Opt.)	mm/s	160			160			160						
Injection rate	cm ³ /s	325	416	535	416	535	668	535	668	816				
Screw speed	rpm	300			250			200						
Nozzle contact force	kN	60			60			100						
Heating power	kW	16.4		18.8	22.2		23.5	26.3		30.9				
Total power	kW	72.9			126.2			133.9						
Total current	A	123			213			226						
GENERAL UNIT														
Oil pump motor	kW	25												
Max. system pressure	Mpa	17.5												
System flow	L/min	126												
Oil tank capacity	L	189												
Machine weight	kg	16880			17300			18690						

*The Data above were acquired by testing in the factory, only for your reference.

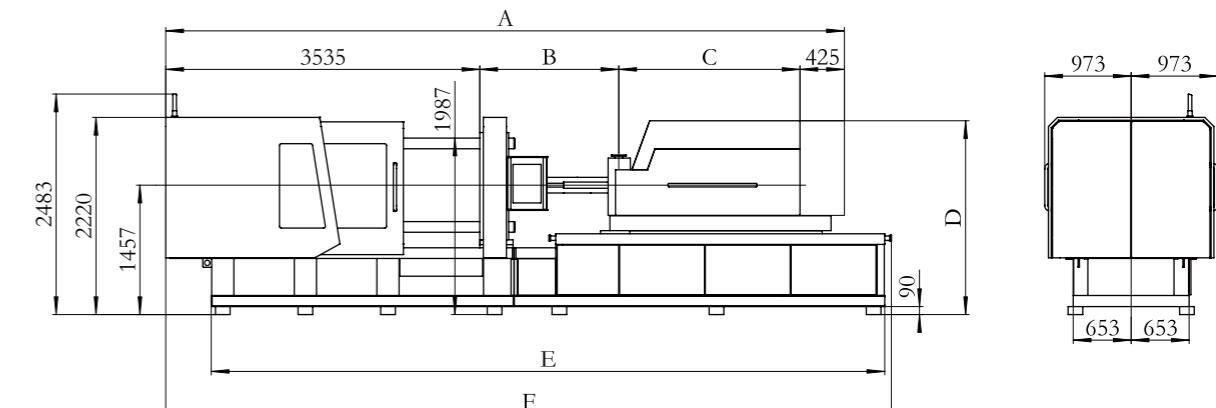

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU1350	7574/7574/7734	1391/1391/1551	2223	2072	7582	8169
IU1930	7565/7565/7740	1565/1565/1740	2040			
IU2700	8074/8074/8247	1769/1769/1942	2345	2182		

FF380 Platen Dimensions

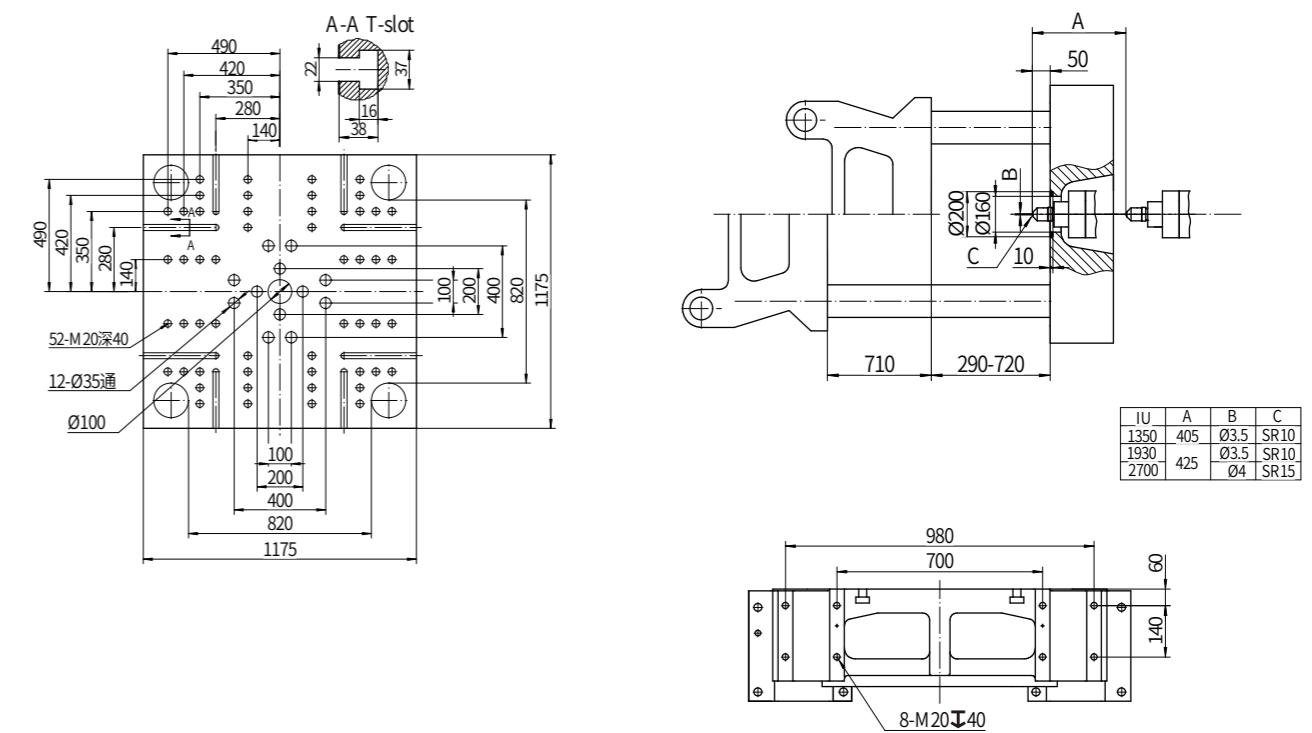


FF460

CLAMPING UNIT														
Clamping force	kN	4600												
Mold opening/closing stroke	mm	810												
Space between tie bars	mm	920×920												
Mold thickness	mm	330-810												
Ejector stroke	mm	200												
Ejector force	kN	99												
Number of ejectors		17												
INJECTION UNIT														
Model of injection unit		IU1930			IU2700			IU3700						
International specification		1928			2695			3691						
		A	B	C	A	B	C	A	B					
Screw diameter	mm	60	68	76	68	76	84	76	84					
Screw L/D ratio		22.6	20	20	22.3	20	20	22.1	20					
Screw stroke	mm	295			330			370						
Stroke-bore ratio		4.9	4.3	3.9	4.9	4.3	3.9	4.9	4.4					
Shot volume	cm ³	834	1071	1338	1198	1497	1829	1678	2050					
Shot weight (PS)	g	767	986	1231	1103	1377	1682	1544	1886					
Injection pressure	MPa	231	180	144	225	180	147	220	180					
Holding pressure	MPa	185	144	115	180	144	118	176	144					
Injection speed (Std./Opt.)	mm/s	160			160			160						
Injection rate	cm ³ /s	416	535	668	535	668	816	668	816					
Screw speed	rpm	250			200			180						
Nozzle contact force	kN	60			100			100						
Heating power	kW	22.2	23.5	26.3	30.9	33.1	36.1							
Total power	kW	126.2			133.9			153.4						
Total current	A	213			226			259						
GENERAL UNIT														
Oil pump motor	kW	25												
Max. system pressure	Mpa	17.5												
System flow	L/min	126												
Oil tank capacity	L	189												
Machine weight	kg	21460		22860		23150								


※The Data above were acquired by testing in the factory, only for your reference.

FF460 Machine Dimensions

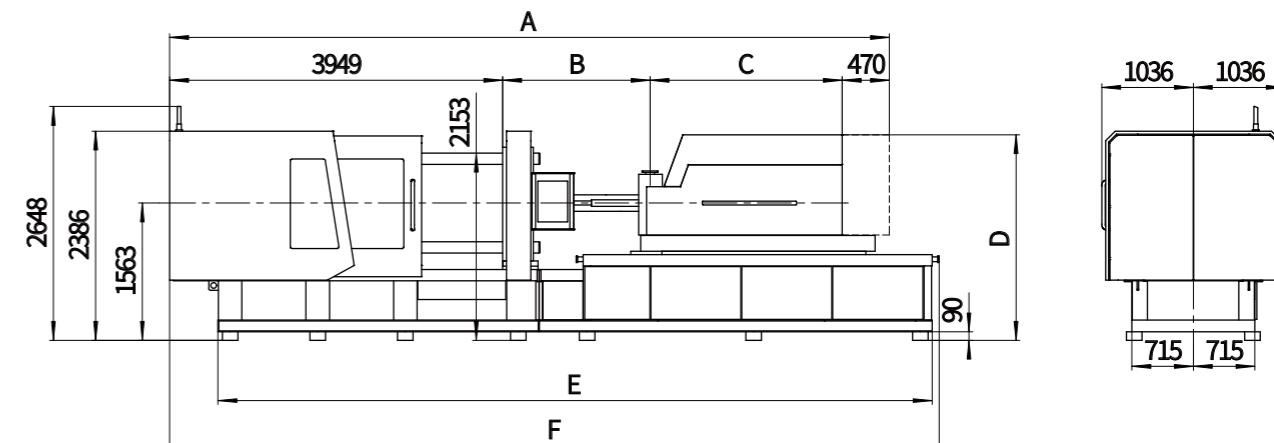

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU1930	8024/8024/8199	1565/1565/1740	2040	2288	8041	8628
IU2700	8533/8533/8706	1769/1769/1942	2345			
IU3700	8837/8837/8997	1953/1953/2113	2465	2364	8221	8808

FF460 Platen Dimensions

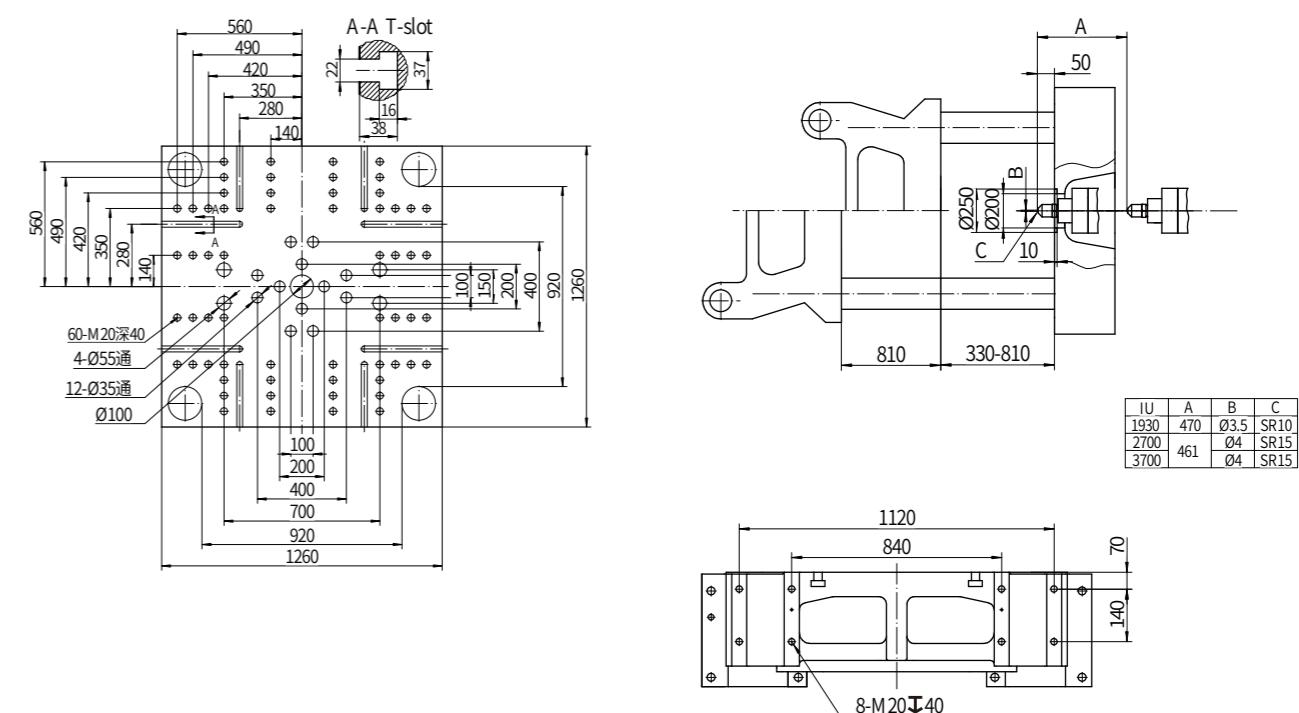


FF550

CLAMPING UNIT																			
Clamping force	kN	5500																	
Mold opening/closing stroke	mm	900																	
Space between tie bars	mm	970×970																	
Mold thickness	mm	400-900																	
Ejector stroke	mm	200																	
Ejector force	kN	155																	
Number of ejectors		23																	
INJECTION UNIT																			
Model of injection unit		IU1350		IU1930		IU2700		IU3700											
International specification		1349		1928		2695		3691											
		A	B	C	A	B	C	A	B	C									
Screw diameter	mm	53	60	68	60	68	76	68	76	84	92								
Screw L/D ratio		22.6	20	20	22.6	20	20	22.3	20	20	20								
Screw stroke	mm	265		295		330		370											
Stroke-bore ratio		5.0	4.4	3.9	4.9	4.3	3.9	4.9	4.3	3.9	4.0								
Shot volume	cm³	585	749	962	834	1071	1338	1198	1497	1829	1678								
Shot weight (PS)	g	538	689	885	767	986	1231	1103	1377	1682	1544								
Injection pressure	MPa	231	180	140	231	180	144	225	180	147	220								
Holding pressure	MPa	185	144	112	185	144	115	180	144	118	176								
Injection speed (Std./Opt.)	mm/s	160		160		160		160											
Injection rate	cm³/s	325	416	535	416	535	668	535	668	816	668								
Screw speed	rpm	300		250		200		180											
Nozzle contact force	kN	60		60		100		100											
Heating power	kW	16.4	18.8	22.2	23.5	26.3	30.9	33.1	36.1										
Total power	kW	72.9		126.2		133.9		153.4											
Total current	A	123		213		226		259											
GENERAL UNIT																			
Oil pump motor	kW	34																	
Max. system pressure	Mpa	17.5																	
System flow	L/min	168																	
Oil tank capacity	L	190																	


※The Data above were acquired by testing in the factory, only for your reference.

FF550 Machine Dimensions

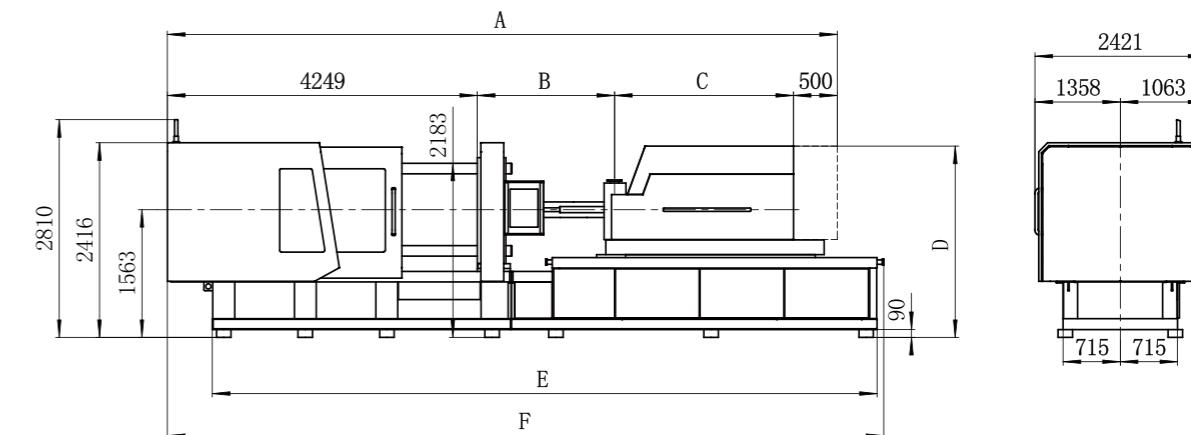

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU1350	7975/7975/8095	1391/1391/1511	1835	2178	8203	8715
IU1930	8354/8354/8529	1565/1565/1740	2040	2288	8203	8715
IU2700	8864/8864/9037	1769/1769/1942	2345			
IU3700	9167/9167/9327	1953/1953/2113	2465	2364	8671	9183


FF550 Platen Dimensions

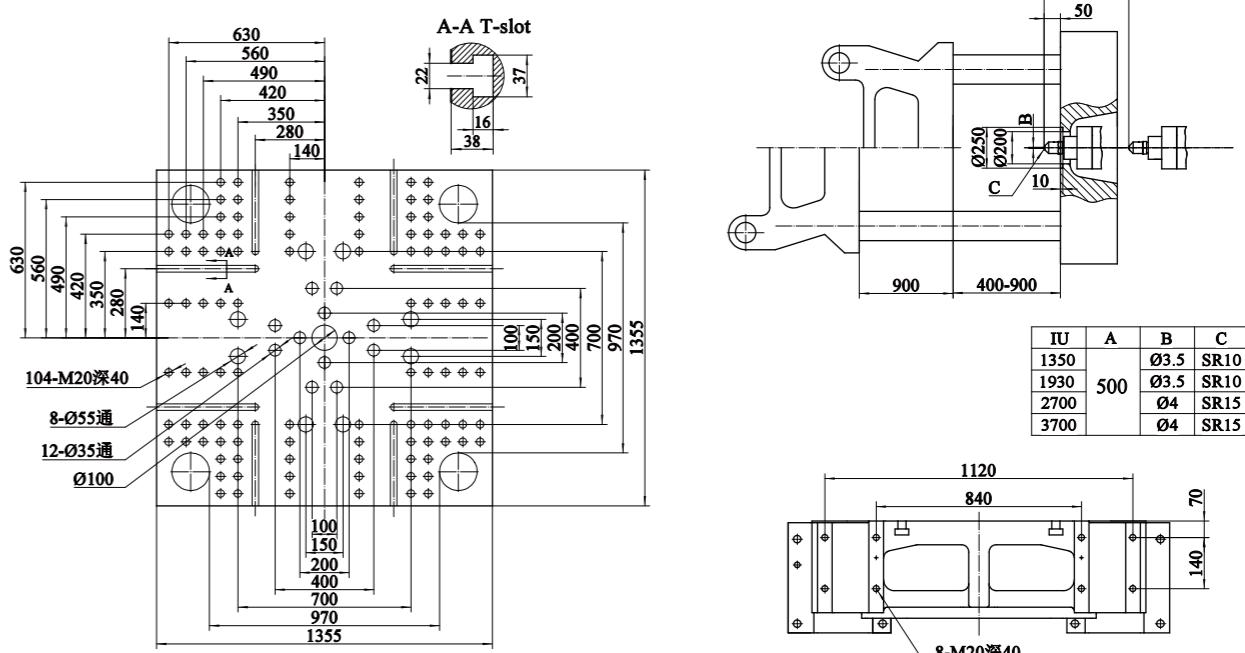

FF650


*The Data above were acquired by testing in the factory, only for your reference.

FF650 Machine Dimensions

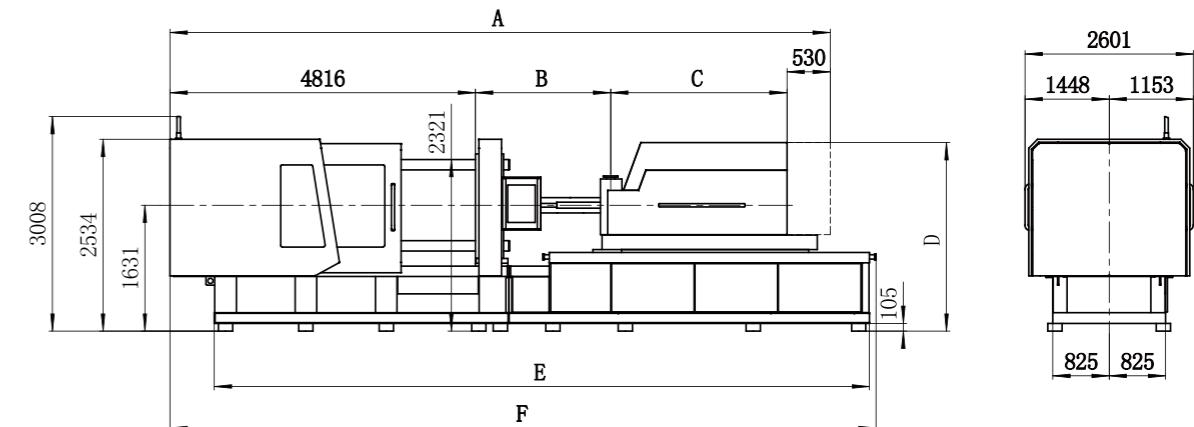

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU1930	8951/8951/9126	1565/1565/1740	2040	2356	9143	9785
IU2700	9488/9488/9661	1769/1769/1942	2373			
IU3700	9764/9764/9924	1953/1953/2113	2465			
IU4800	10219/10414/10569	2149/2344/2499	2724		9743	10385

FF650 Platen Dimensions

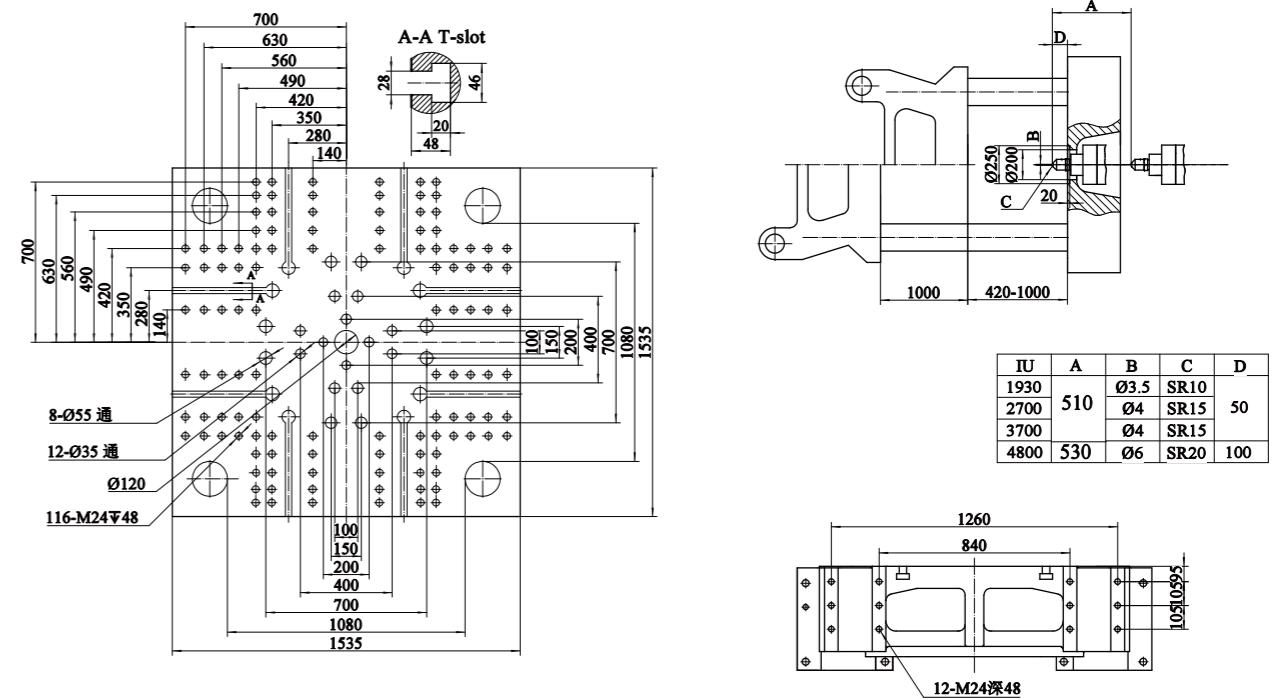


FF850

CLAMPING UNIT																	
Clamping force	kN	8500															
Mold opening/closing stroke	mm	1200															
Space between tie bars	mm	1120×1120															
Mold thickness	mm	500-1100															
Ejector stroke	mm	210															
Ejector force	kN	230															
Number of ejectors		23															
INJECTION UNIT																	
Model of injection unit		IU2700			IU3700			IU4800		IU6800							
International specification		2695			3691			4800		6800							
	A	B	C	A	B	C	A	B	C								
Screw diameter	mm	68	76	84	76	84	92	84	92	100	92						
Screw L/D ratio		22.3	20	20	22.1	20	20	21.9	22	21.6	21.7						
Screw stroke	mm	330			370			400			480						
Stroke-bore ratio		4.9	4.3	3.9	4.9	4.4	4.0	4.8	4.3	4.0	5.2						
Shot volume	cm³	1198	1497	1829	1678	2050	2460	2217	2659	3142	3191						
Shot weight (PS)	g	1103	1377	1682	1544	1886	2263	2039	2446	2890	2936						
Injection pressure	MPa	225	180	147	220	180	150	216	180	152	213						
Holding pressure	MPa	180	144	118	176	144	120	173	144	122	170						
	mm/s	160			160			160			160						
Injection rate	cm³/s	581	726	887	726	887	1064	887	1064	1257	1064						
Screw speed	rpm	200			180			150			150						
Nozzle contact force	kN	100			100			100			120						
Heating power	kW	26.3	30.9	33.1	36.1	36.5	41.2	45.0	41.7	47.2	54.1						
Total power	kW	116.1			133.3			133.2			168.5						
Total current	A	226			259.0			262.7			361.6						
GENERAL UNIT																	
Oil pump motor	kW	51															
Max. system pressure	Mpa	17.5															
System flow	L/min	263															
Oil tank capacity	L	300															


※The Data above were acquired by testing in the factory, only for your reference.

FF850 Machine Dimensions

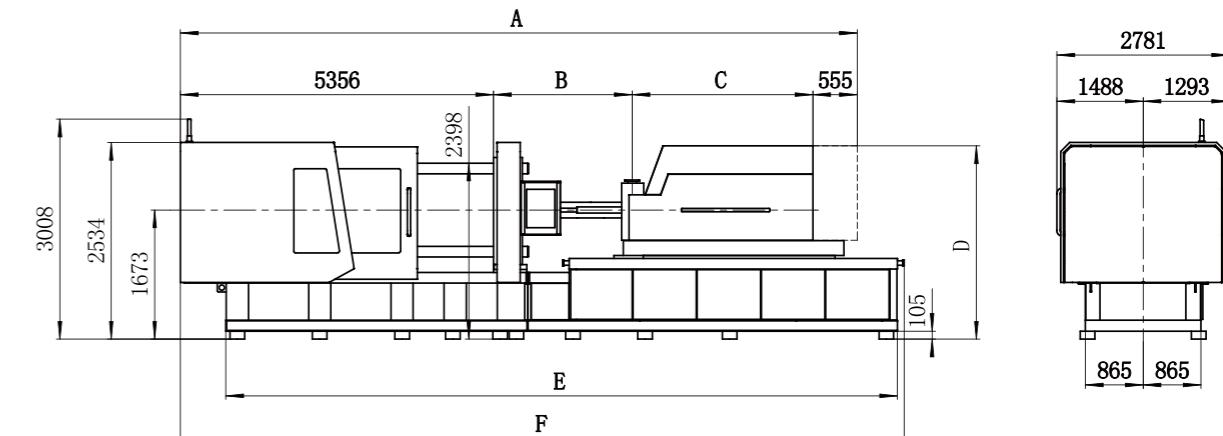

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU2700	10053/10053/10226	1769/1769/1942	2373	2398		
IU3700	10329/10329/10489	1953/1953/2113	2465	2474	10008	10680
IU4800	10784/10797/11134	2149/2344/2499	2724	2527		
IU6800	11267/11487/11617.5	2319/2539/2669.5	3037	2532	210608	11280

FF850 Platen Dimensions

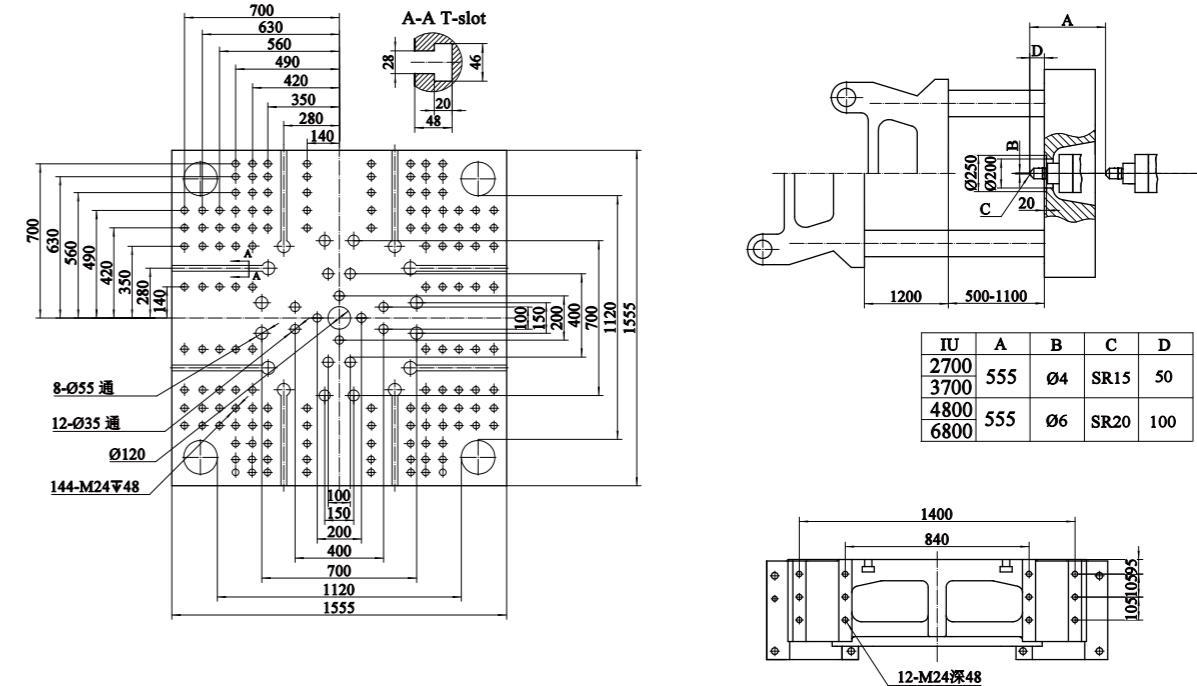


FF1080

CLAMPING UNIT															
Clamping force	kN	10800													
Mold opening/closing stroke	mm	1300													
Space between tie bars	mm	1320×1320													
Mold thickness	mm	500-1200													
Ejector stroke	mm	210													
Ejector force	kN	230													
Number of ejectors		29													
INJECTION UNIT															
Model of injection unit		IU3700			IU4800			IU6800		IU9000					
International specification		3691			4800			6800		9000					
		A	B	C	A	B	C	A	B	C					
Screw diameter	mm	76	84	92	84	92	100	92	100	108					
Screw L/D ratio		22.1	20	20	21.9	22	21.6	21.7	22	21.5					
Screw stroke	mm	370			400			480		550					
Stroke-bore ratio		4.9	4.4	4.0	4.8	4.3	4.0	5.2	4.8	4.4					
Shot volume	cm ³	1678	2050	2460	2217	2659	3142	3191	3770	4397					
Shot weight (PS)	g	1544	1886	2263	2039	2446	2890	2936	3468	4045					
Injection pressure	MPa	220	180	150	216	180	152	213	180	154					
Holding pressure	MPa	176	144	120	173	144	122	170	144	123					
	mm/s	160			160			160		160					
Injection rate	cm ³ /s	726	887	1064	887	1064	1257	1064	1257	1466					
Screw speed	rpm	180			150			150		150					
Nozzle contact force	kN	100			100			120		120					
Heating power	kW	33.1	36.1	36.5	41.2	45.0	41.7	47.2	54.1	53.7					
Total power	kW	133.3			133.2			168.5		215.6					
Total current	A	259.0			262.7			361.6		516.8					
GENERAL UNIT															
Oil pump motor	kW	51													
Max. system pressure	Mpa	17.5													
System flow	L/min	263													
Oil tank capacity	L	300													



※The Data above were acquired by testing in the factory, only for your reference.

FF1080 Machine Dimensions

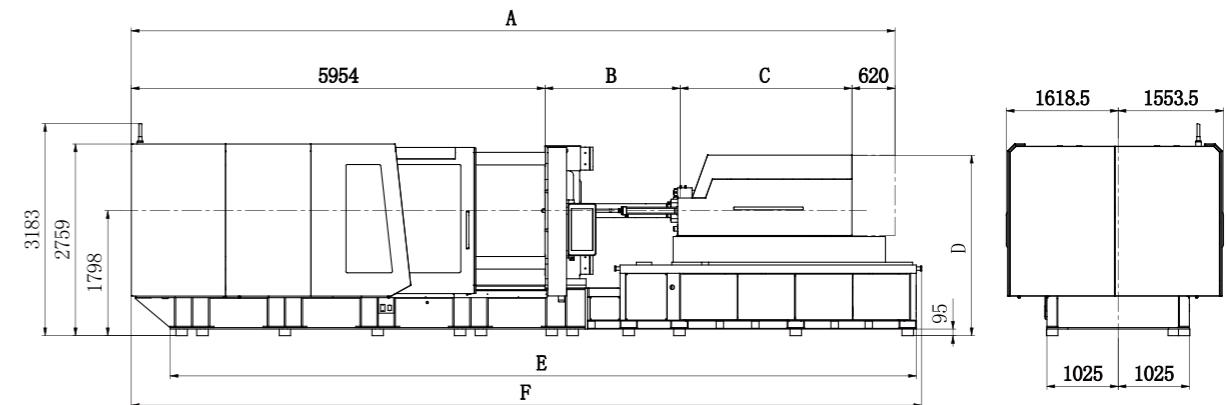


Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU3700	10992/10992/11152	1953/1953/2113	2465	2609	10740	11375
IU4800	11447/11642/11797	2149/2344/2499	2724	2662		
IU6800	11930/12150/12280.5	2319/2539/2669.5	3037	2667	11340	11975
IU9000	12325/12553/12737	2510/2738/2922	3241	2707	11740	12375

FF1080 Platen Dimensions

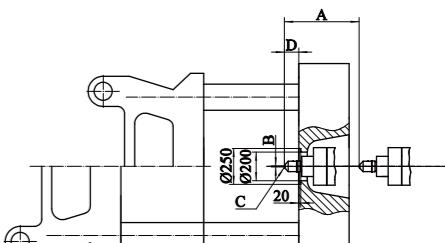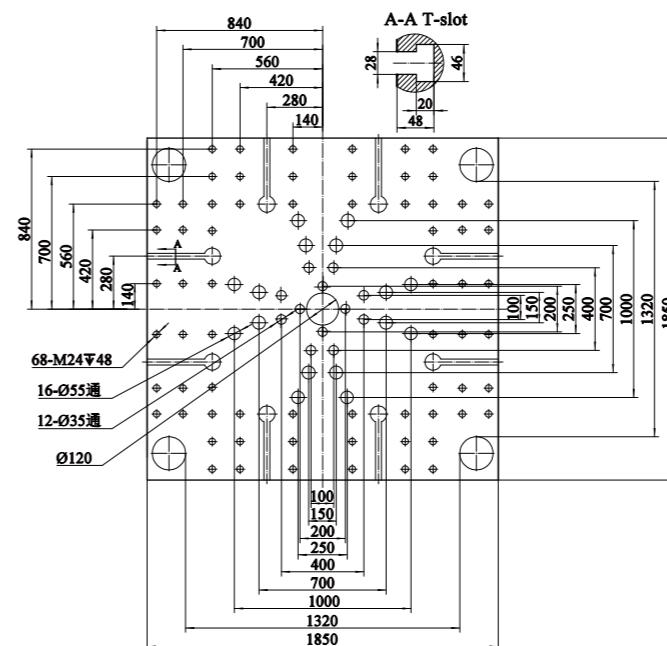

IU	A	B	C	D
3700	610	Ø4	SR15	50
4800	620	Ø6	SR20	100
6800				
9000				

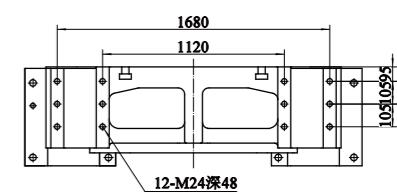


FF1380

CLAMPING UNIT																	
Clamping force	kN	13800															
Mold opening/closing stroke	mm	1500															
Space between tie bars	mm	1550×1450															
Mold thickness	mm	650-1300															
Ejector stroke	mm	250															
Ejector force	kN	330															
Number of ejectors		29															
INJECTION UNIT																	
Model of injection unit		IU3700			IU4800			IU6800			IU9000						
International specification		3691			4800			6800			9000						
		A	B	C	A	B	C	A	B	C							
Screw diameter	mm	76	84	92	84	92	100	92	100	108	116						
Screw L/D ratio		22.1	20	20	21.9	22	21.6	21.7	22	21.5	21.6						
Screw stroke	mm	370			400			480			550						
Stroke-bore ratio		4.9	4.4	4.0	4.8	4.3	4.0	5.2	4.8	4.4	5.5						
Shot volume	cm³	1678	2050	2460	2217	2659	3142	3191	3770	4397	4320						
Shot weight (PS)	g	1544	1886	2263	2039	2446	2890	2936	3468	4045	3974						
Injection pressure	MPa	220	180	150	216	180	152	213	180	154	210						
Holding pressure	MPa	176	144	120	173	144	122	170	144	123	168						
	mm/s	160			160			160			160						
Injection rate	cm³/s	726	887	1064	887	1064	1257	1064	1257	1466	1257						
Screw speed	rpm	180			150			150			150						
Nozzle contact force	kN	100			100			120			120						
Heating power	kW	33.1	36.1	36.5	41.2	45.0		41.7	47.2	54.1	53.7						
Total power	kW	133.3			133.2			168.5			215.6						
Total current	A	259.0			262.7			361.6			516.8						
GENERAL UNIT																	
Oil pump motor	kW	60															
Max. system pressure	Mpa	17.5															
System flow	L/min	336															
Oil tank capacity	L	350															


※The Data above were acquired by testing in the factory, only for your reference.

FF1380 Machine Dimensions

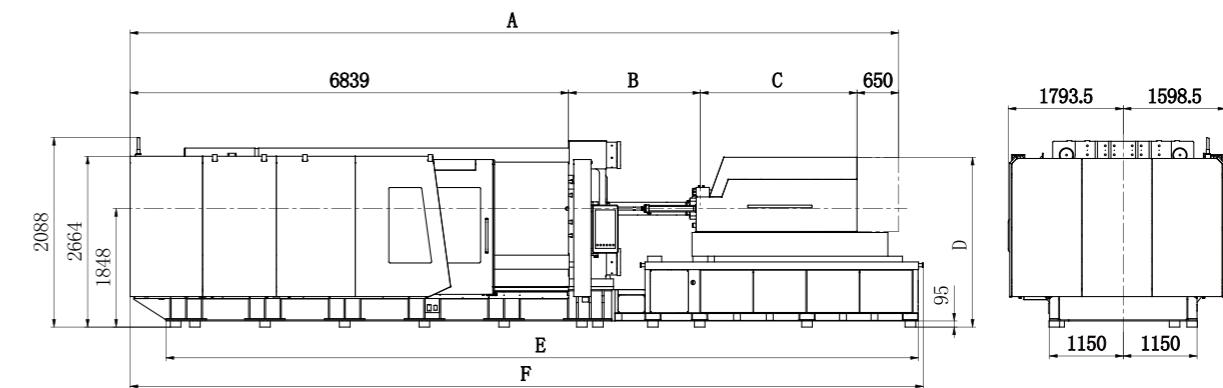

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU3700	11957/11957/12117	1953/1953/2113	2465	2649	11735	12372
IU4800	12412/12607/12762	2149/2344/2499	2724	2714		
IU6800	12895/13115/13245.5	2319/2539/2669.5	3037	2707	12335	12972
IU9000	13290/13518/13702	2510/2738/2922	3241	2747	12735	13372

FF1380 Platen Dimensions

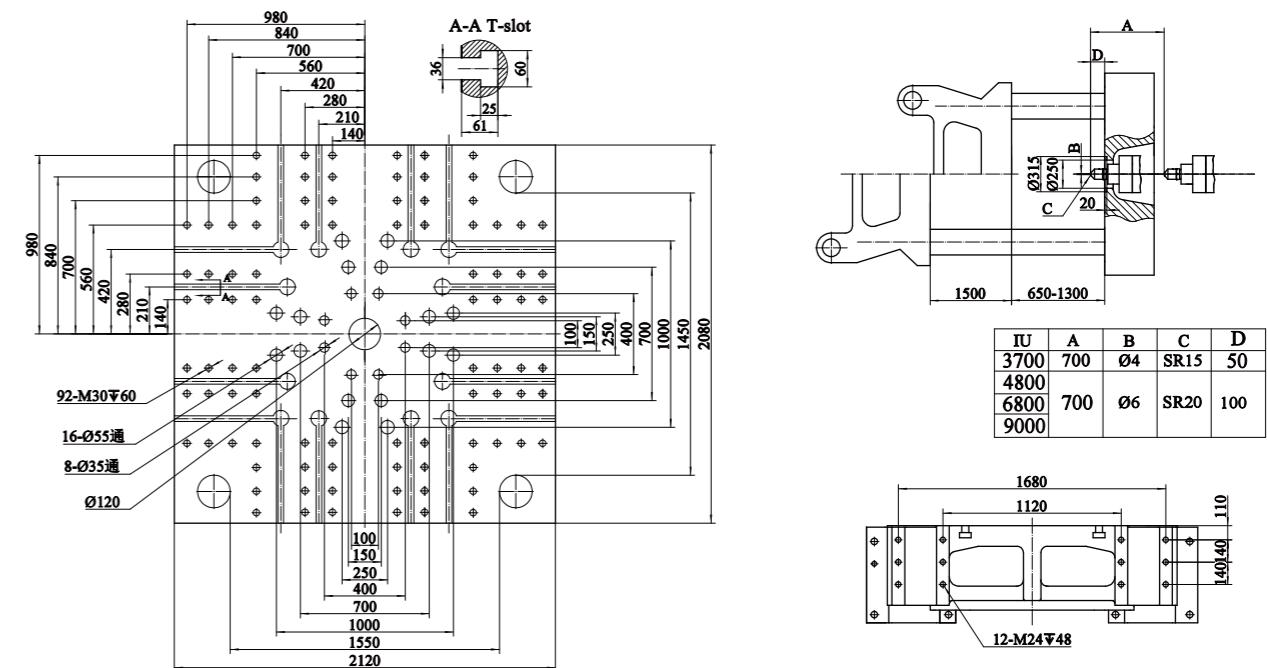

Standard Features

Control and monitoring unit

- Highly sensitive 12-inch color touchscreen display
- Memory of molding conditions (over 500 items)
- 1 set of standard USB interface on the operation panel
- Multiple language (Chinese and English)
- Real-time display of injection molding data (200 items displayed; 5000 items saved)
- Operation modification record
- Alarm record
- Electrical control circuit for simple robot
- Metric and English unit conversions
- I/O check display function
- Printer interface (USB 17)
- Cycle time monitoring
- Production management
- PDP data and charts
- Injection quality check
- Cycle counter
- Molding temperature monitoring
- Tri-color alarm light
- Alarm buzzer
- Low-pressure mold protection curve checking
- Injection pressure protection
- Defect alert and handling
- Real-time display of injection and plasticizing servo motion curves
- Display of actual value
- Malfunction handling option selection
- Product quality monitoring
- Curves of mold opening/closing and ejector
- Injection processing curve monitoring

Clamping unit

- 5-stage mold opening and closing control
- Needle valve/Spure functions (4 sets)
- Multi-stage ejector forward
- Ejector backward delay time monitoring
- Automatic mold height adjustment
- Spure timing control
- Curves of mold open/close and ejector
- Platen with T-slot and mold mounting holes
- Low pressure mold protection (Ai highly-sensitive mold protection)
- Low speed, low pressure mold opening / closing in mold adjustment mode
- Ejection inside the mold (gate cutting inside the mold)
- Mold opening during ejector backward
- Ejector backward in place confirmation
- Ejector motion selection (4 modes)
- 3-stage ejector control
- Ejector motion delay
- Mold cooling water distributor
- Embedded dual-size locating ring design (fixed platen)
- Emergency stop function (on both operator side and non-operator side)
- EU standard threaded mounting holes for robot
- Central lubrication system
- Slope control for mold opening and closing (high, medium and low modes)
- Core puller/unsgrew function (2 sets of electrical interfaces)
- Air blast (4 sets of electrical interfaces)
- Hydraulic ejector

Plasticizing and injection unit

- Injection safety device (Test switch)
- 5-stage injection control (pressure, speed, position)
- 3-stage holding pressure control (pressure, speed, time)
- 3-stage plasticizing control (back pressure, speed, position)
- Suck-back control (pre-suckback and post-suckback)
- Injection delay function
- Pre-plasticizing delay
- Holding pressure switching (6 modes)
- Injection speed response setting (High, medium, low)
- Mold opening during plasticizing
- Molding temperature closed-loop control
- Temperature holding
- Temperature optimization
- Synchronized temperature rise
- Appointed temperature rise
- Remaining resin prevention
- Screw cold start prevention
- Automatic material purge
- Calibration of injection pressure zero point
- Real-time display of plasticizing speed
- Real-time display of plasticizing back pressure
- Injection unit shift settings (switch check, shift time)
- High-force nozzle contact device (configurable)
- Nozzle center alignment adjusting device

Other features

- Color of FF series electric injection molding machine
- Closed safety door
- Adjustable vibration-damping wedge mount
- Hopper sliding device
- Power socket (220V x 1, on clamping unit frame)
- Power socket (380V, 32A x 2, 16A x 1, on the right side of the injection unit frame)
- Common tool kits and spare parts

Optional Features

Control and monitoring units

- EU12 electrical interface for robot
- EU 67 electrical interface for robot
- Additional languages
- Cooling water circuit
- Heater burnout detection
- External transformer
- Electrical interface for product sorting device
- Electrical interface for gas assisted injection
- Electrical interface for magnetic platens
- Electrical interface for mold cavity pressure check
- Mold temperature display and control
- OPC UA/DA
- EU 73 electrical interface

Clamping unit

- Various locating rings
- Core unscrewing device
- Needle valve/spure device
- Air blast device
- Product chute
- Mold thermal insulation plate
- Glass-tube cooling water flowmeter
- Pneumatic ejector
- Pneumatic core puller device
- Increased Maximum daylight
- Mold slide protection
- Injection compression (clamping synchronized with injection)

Plasticizing and injection unit

- Dedicated barrel unit
- Extended nozzle
- Spring shut-off nozzle
- Stainless steel hopper (max. load of 50kg dry material)
- Barrel heat-retaining energy-saving device
- Ceramic heater band
- Mold internal pressure V/P switching
- Needle valve pneumatic injection nozzle
- High capacity injection nozzle heating band
- Customized nozzle head

Other features

- Hopper sliding device (on wheels)
- Barrel heat-retaining energy-saving device
- Auxiliary electrical cabinet
- Vacuum air extractor
- Quality control sorting device
- Integrated multi-stage mold temperature control

Disclaimer:

1. The company reserves the right to improve the products described in the brochure, specifications are subject to change without notice.
2. The product photos are for reference only, which are subject to the actual products.
3. The data are obtained from Yizumi's laboratory test, and the final interpretation right belongs to Yizumi.