

THINK TECH FORWARD

YIZUMI | HPM

Designed by YIZUMI, November 2023

FF-N

100T-1510T

FF-N SERIES ELECTRIC
INJECTION MOLDING MACHINE



YIZUMI-HPM CORPORATION

Address: 3424 State Route 309, Iberia, Ohio, 43325

TEL: 740-382-5600 Email: sales@yizumi-hpm.com parts@yizumi-hpm.com

www.yizumi-hpm.com

[DISCLAIMER]

[1] YIZUMI reserves the right to modify the product description in the catalogue. Specification might be changed without prior notice.
[2] The picture in the catalogue is for reference only. The real object should be considered as final.
[3] The data in the catalogue is obtained from internal testing in YIZUMI laboratory.

Please refer to the actual machine for the final data. YIZUMI reserves the right of final interpretation upon disputes and ambiguities.



THINK TECH FORWARD

PRODUCT DETAILS

About FF-N Series

I Development Background

Upgrade of industry and product

While the industrial upgrading in China requires high-quality, high-precision, and high-efficiency equipment, the end users demand products with higher quality, better appearance, and more reliability.

Strong customer base

With the in-depth understanding of customer pain points and demand which based on tens of thousands of customers over time, we have set up a professional team to develop more cost-effective electric injection molding machines.

Times call for domestically manufactured alternatives

While the Japanese products dominate the market at present, customers desire to have domestically manufactured alternatives to the imports for a more prompt comprehensive support and the best value for money.

Automation and intellectualization are the trends

The growing demands for industrial automation and intellectualization ask for better products to increase customer value. YIZUMI responds to this need with the new generation FF series electric injection molding machines.

I Core value Proposition

YIZUMI is committed to developing a product that meets the technology and quality standards of Japanese electric injection molding machines, provides more cost-effective experiences, and better fulfills customers' expectations of return on investment.

Upgrade from conventional models

Upgrading to a level that has higher requirements than conventional machines and allows customers to easily realize the automation and intellectualization while improving quality consistency and efficiency.

Upgrade to meet application requirements

Compared to conventional models, the new electric series of injection molding machines enhances the performance in all aspects to meet the optimized requirements (e.g. Thickness, precision, and complexity) of more stringent core elements of products.

I Critical Success Factors

Warranted by the overall strength of YIZUMI

YIZUMI has the powerful capacity in HW/SW development, competent R&D teams, and rigorous quality control system.

Advanced integrated project development (IPD) process assurance

The rigorous and comprehensive IPD process established based on the in-depth understanding of customer needs and pain points ensures a high degree of customer satisfaction.

In-depth industrial know-how and collaboration

With years of accumulated knowledge in machine designs, YIZUMI is committed to creating the electric injection molding machines that meet our customer's product needs through collaboration with international top-level expert teams.

FF-N Series Electric Injection Molding Machine

Three Major Customer Value Propositions:



Stability & Precision



Efficiency & Flexibility



Automation & Intellectualization

YIZUMI is committed to developing a product that meets the technology and quality standards of Japanese electric injection molding machines, provides more cost-effective experiences, and better fulfills customers' expectations of return on investment. Upgrading to a level that has higher requirements than conventional machines and allows customers to easily realize the automation and intellectualization while improving quality consistency and efficiency. Performance improvement in all aspects in comparison with conventional models to meet the optimized requirements (e.g. Thickness, precision, and complexity) of more stringent core elements of products.

<0.3%

Repeatability of
clamping force
<0.3%

<0.05

Platen parallelism
(with load) <0.05mm

±0.03

Repeatability of mold
opening/closing
positions ±0.03mm



Static temperature
accuracy ±0.5°C

Backflow detection
variation ±0.1mm

Repeatability of back
pressure ±1bar

Repeatability of
injection ±0.05mm

※The data above are derived from Yizumi's lab results and are for your reference only;

Three Major Customer Value Propositions



Stability & Precision:

High stability of the Tie-Bar Free (TBF) technology

Contact-free tie bars allow fast and stable mold opening/closing and significantly reduce energy consumption, causing no pollution to the work environment

Highly stable three linear guider support (TLGS) technology

High precision linear guide supports significantly reduce the friction of the plasticizing unit and improves the pressure stability of plasticizing and injection, resulting in stable product quality. In the meantime, the linear guide effectively reduces energy consumption and enhances the smoothness of mold opening/closing

High-precision sensor technology

The use of the world's leading position sensors with 2 million CPR resolution delivers incredible stability in position and speed control

Fully automatic lubrication system

While the lubricating grease works as the blood of injection molding machine, the fully automatic maintenance-free lubrication system ensures the long-term operation stability of the machine



Automation & Intellectualization:

- Optimized automation interface for centralized control of integrated robot, hot runner, and auxiliary

- SMART mold protection to ensure the safe use of high-value molds in an unmanned operating environment

- The high stability and consistency of the machine process parameters allow unattended operation for an extended time

- Full data monitoring and extraction provide a solid foundation for intellectualization

- With accurate mold opening and full-featured second mold closing and opening, the automation of special process is fully warranted

- The intelligent sorting system automatically removes defect parts to ensure the production quality

- Combined with MES, the intelligent Statistics Process Control (SPC) helps to achieve automation and informationization

- Smart Clamping Force Management (SCFM) system

- Smart Injection Control (SIC)

- Integrated factory management system with Yi CMS + Yi MES



Efficiency & Flexibility:

Double the injection speed

Compared with conventional machines, doubling the injection speed does more than shortening the injection time. It brings more possibilities to product design and allows customers to enjoy greater flexibility in terms of wall thickness, sprue size and precision of the molded parts

Plasticizing speed is significantly increased

The increase in plasticizing speed reduces the cycle time while delivering enhanced production stability

Increase mold opening and closing speed by 50%

Dry cycle has a great importance to customers as the faster dry cycle results in higher productivity

Multi-axis synchronization

As the mold opening/closing, injection, plasticizing, and ejection are driven by separate motors, the easy synchronization of processes reduces the cycle time of the production

Built-in hydraulic pump station

Support a variety of molding process with great flexibility and efficiency

Highly stable clamping unit

Fast and steady mold opening/closing speed. Repeatability of mold opening/closing positions $\pm 0.03\text{mm}$

High-rigidity design of movable platen

Provide good rigidity and uniform force distribution with platen parallelism $\leq 0.03\text{mm}$, suitable for injection molding with precision molds

European KEBA2000 controller


The powerful system is easy to operate and ideal for the high-performance solutions for electric injection molding machines

Excellent injection stability

More accurate control for more stable and reliable molding precision. The stability precision of injection pressure and holding pressure is at $\pm 0.1\text{Mpa}$



Clamping Unit

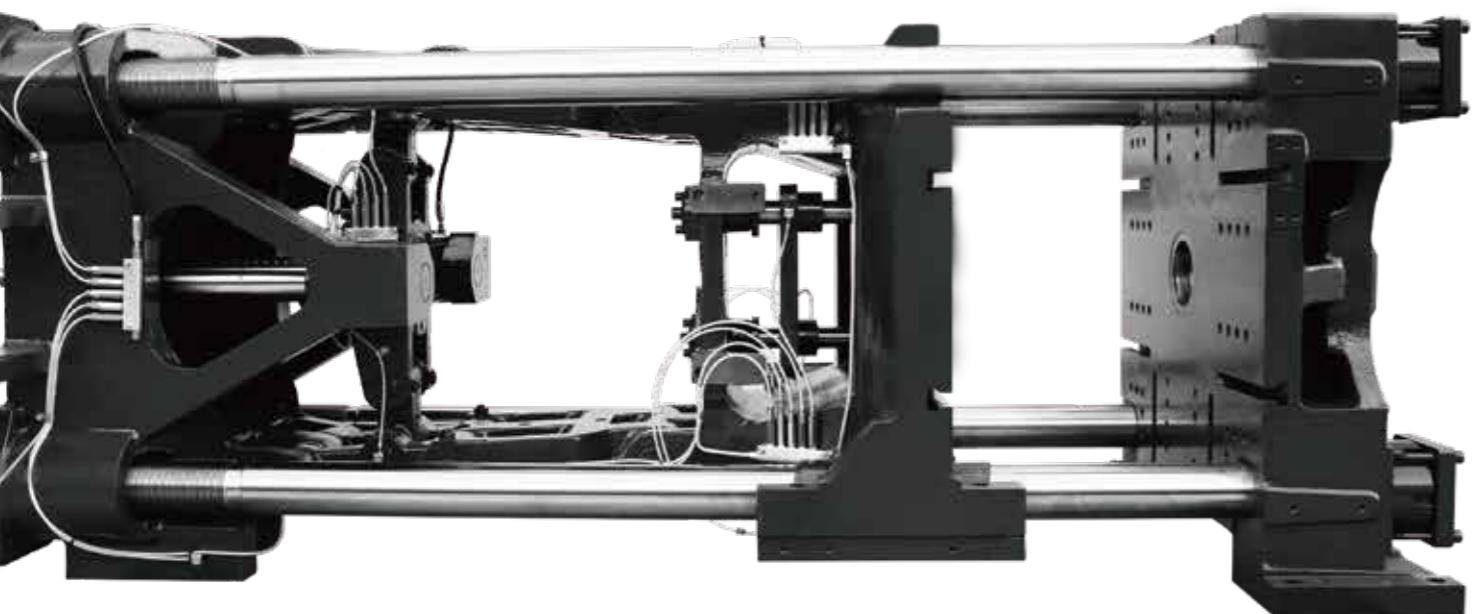


High stability of the TBF technology

- ▶ The clamping unit adopts the TBF (Tie Bar Free) technology for easy operation and maintenance
- ▶ Keep the mold area clean to prevent product contamination



Linear rail moving design for mold opening/closing

- ▶ The directional accuracy reaches **0.02mm**
- ▶ Fast and steady mold opening/closing speed. Repeatability of mold opening/closing positions **$\pm 0.03\text{mm}$**

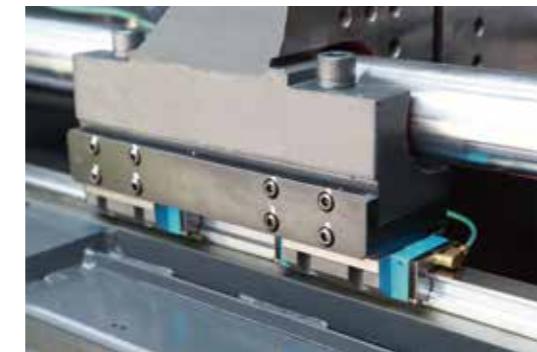


High-rigidity design of movable platen

- ▶ Offer great rigidity and uniform distribution of force
- ▶ Suitable for injection molding with precision molds
- ▶ High repeatability of mold-open end position
- ▶ Platen parallelism (with load) $\leq 0.05\text{mm}(FF100-260-\text{N})$
- ▶ Platen parallelism (with load) $\leq 0.08\text{mm}(FF330-420-\text{N})$
- ▶ Faster dry cycle




Dual-cylinder parallel ejection design

- ▶ Uniform force application for mold release
- ▶ Servo motor driven ejection is optional
- ▶ Can achieve functions such as various modes of synchronized ejection and ejector retraction, gate cutting inside the mold, etc.
- ▶ Accuracy of ejection position up to **0.2mm**, conducive to product accuracy and repeatability.

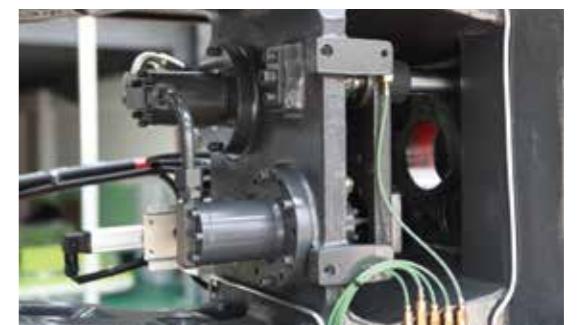

Unique "SMART" mold protection feature

- ▶ Can detect very small obstacles and resistance
- ▶ Reduce the extent of mold damage when there are foreign objects in the mold cavity or faulty operation occurs

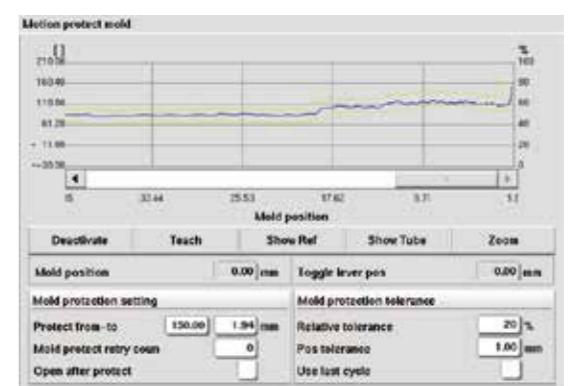

Injection Unit



The use of advanced LGS (Linear Guide Support) technology

- ▶ Integrated design enhances the overall rigidity of the injection unit
- ▶ No unnecessary friction. Fast forward and backward





Dedicated screws for different materials

- ▶ DIN standards for barrel unit size, processing accuracy, surface finish, and material selection
- ▶ Increase the repeatability of injection




Temperature closed loop control

- ▶ Static deviation: $\pm 0.5^\circ$

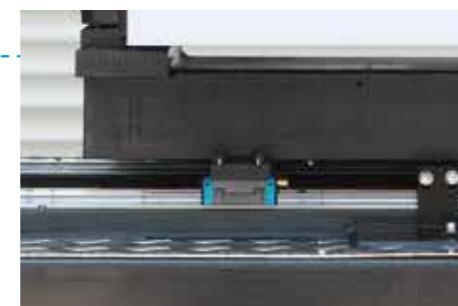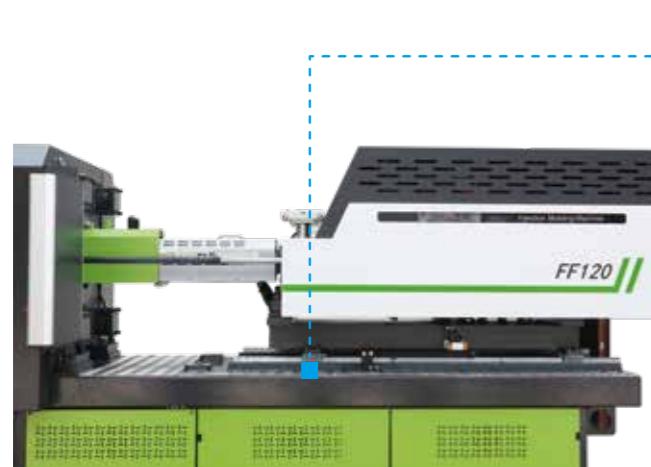

Close-up

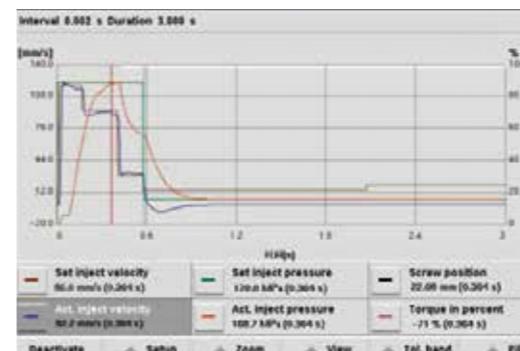

Closed loop injection pressure control technology

- ▶ Provide more accurate control for more stable, reliable and precise molding.
- ▶ The stability precision of injection pressure and holding pressure is at $\pm 0.1 \text{ MPa}$

Electrical Control System

Using European KEBA2000 Controller


- The powerful system is easy to operate and ideal for the high-performance solutions for electric injection molding machines
- 12-inch HD color touchscreen display with clear and neat screen layout
- Standard Process quality control (PDP), and Statistical process control (SPC) features
- Auto-sorting function
- Oscilloscope with chart display function to record the curve of process data change
- Centralized (networked) real-time remote operation and control
- The flexible I/O expansion modules allow integration of more features as needed and are programmable



- Advanced HW and SW systems to support Industry 4.0
- 1ms scan cycle
- 16 levels of user access management to ensure data security

Unique servo direct control (SDC) technology

- Process algorithm independently developed by YIZUMI for the servo drive
- Four servo motors control injection, plasticizing, clamping, and ejection independently, allowing faster feedback, more responsive control, and improved control accuracy
- More precise control of speed, position and pressure to meet the requirements of precision equipment

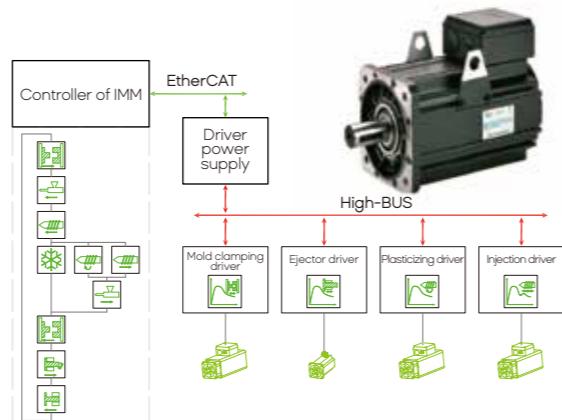

All-metal baseboard for the electric control unit

- Galvanized mounting plate for better cooling and anti-interference capacity
- Neat wiring and standardized interface layout for easy operation

Modular Injection Unit Selections

The modular injection unit allows flexible combination with a number of options to quickly meet various application needs:

- 100T~1510T clamping force, 13 clamping modes
- 13 injection unit configurations, screws range $\Phi 22\sim\Phi 116\text{mm}$
- Each clamping mode has the option to select different injection units and 9 types of barrel units
- Cover injection speeds of 160/200/300/350 (mm/s)


Machine Screw	Injection unit	IU170	IU200	IU320	IU430	IU670	IU930	IU1350	IU1930	IU2700	IU3700	IU4800	IU6800	IU9000
FF100-N		22,26,30	26,30,35											
FF130-N			26,30,35	30,35,40	35,40,43									
FF180-N				30,35,40	35,40,43	40,48,53								
FF220-N					35,40,43	40,48,53	48,53,60							
FF260-N						40,48,53	48,53,60	53,60,68						
FF330-N							48,53,60	53,60,68	60,68,76					
FF420-N								53,60,68	60,68,76	68,76,84				
FF510-N									60,68,76	68,76,84	76,84,92			
FF600-N									53,60,68	60,68,76	68,76,84	76,84,92		
FF710-N									60,68,76	68,76,84	76,84,92	84,92,100		
FF930-N										68,76,84	76,84,92	84,92,100	92,100,108	
FF1180-N										76,84,92	84,92,100	92,100,108	100,108,116	
FF1510-N											76,84,92	84,92,100	92,100,108	100,108,116




FF100-N

CLAMPING UNIT							
Clamping force	kN	900					
Mold opening/ closing stroke	inch	12.60					
	mm	320					
Space between tie bars	inch	16.5×16.5					
	mm	420×420					
Mold thickness	inch	5.91-16.14					
	mm	150-410					
Ejector stroke	inch	3.15					
	mm	80					
Ejector force	kN	22.6					
Number of ejectors		5					
INJECTION UNIT							
Model of injection unit(Std./Opt.)		IU170 / IU170h		IU200 / IU200h			
International specification		165		198			
	A	B	C	A	B	C	
Screw diameter	inch	0.866	1.024	1.181	1.024	1.181	
	mm	22	26	30	26	30	
Screw L/D ratio	L/D	22	22	22	22	20	
Screw stroke	inch	4.53		5.51			
	mm	115		140			
Shot volume	in³	2.67	3.73	4.96	4.54	6.04	
	cm³	44	61	81	74	99	
Shot weight(PS)	oz	1.4	2.0	2.6	2.4	3.2	
	g	40	56	75	68	91	
Injection pressure	psi	54695	39160	29414	38620	29008	
	Mpa	377	270	203	266	200	
Holding pressure	psi	43756	31328	23531	30896	23206	
	MPa	302	216	162	213	160	
Injection speed (Std./Opt.)	inch/s	7.87/13.78			7.87/13.78		
	mm/s	200/350			200/350		
Injection rate (Std./Opt.)	oz/s	2.47	3.46	4.59	3.46	4.59	
	g/s	70	98	130	98	130	
Screw speed	rpm	400			400		
Nozzle contact force	kN	20			20		
Heating power	kW	4.9	5.9	7.5	5.9	7.5	
Total power	kW	35.5/36.7			35.5/37.9		
GENERAL UNIT							
Dry cycle	s	1.44					
Oil pump motor	kW	10					
Max. system pressure	psi	2321					
	MPa	16					
Oil tank capacity	gal	28					
	L	106					
Machine weight	lb	8866		8888			

FF100-N Machine Dimensions

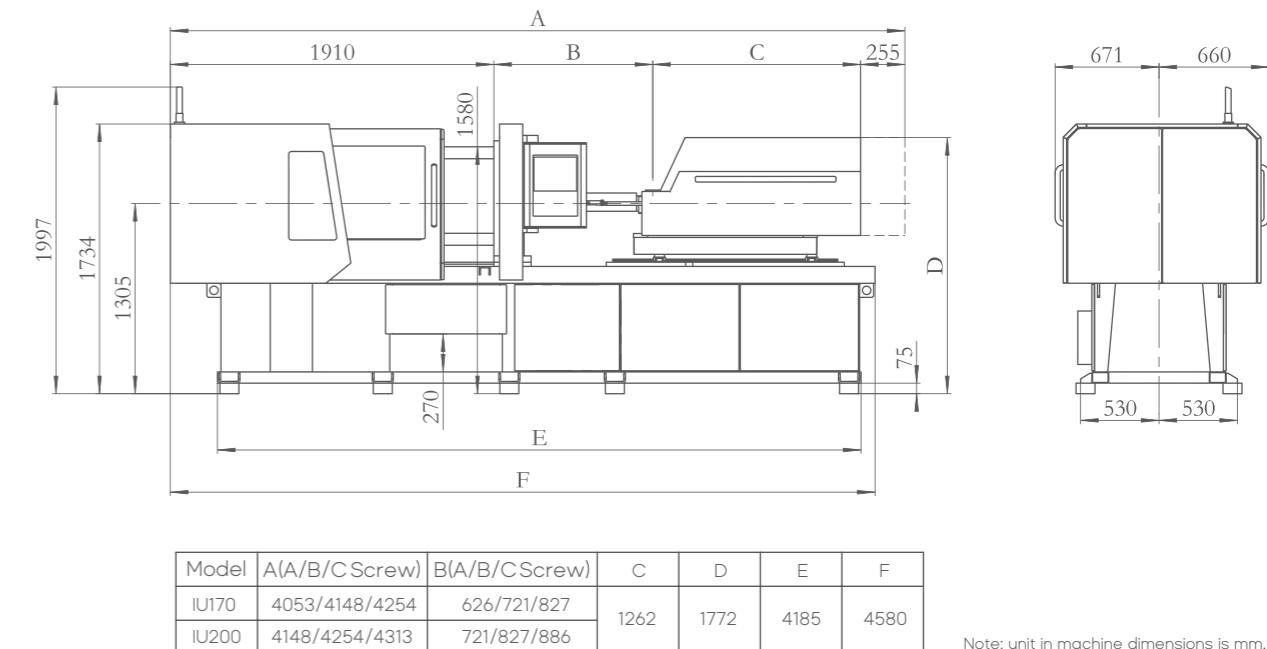

FF100-N Platen Dimensions

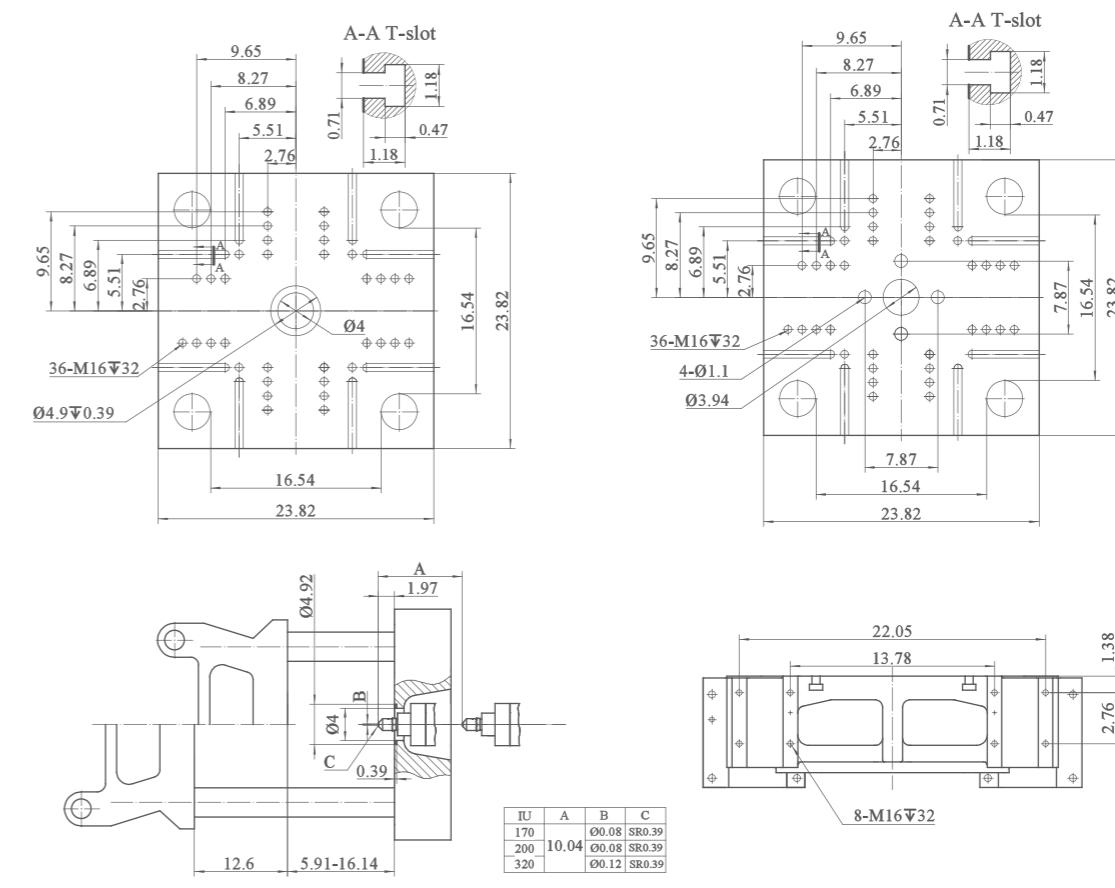


※The Data above were acquired by testing in the factory, only for your reference.


FF130-N

CLAMPING UNIT														
Clamping force	kN	1200												
Mold opening/ closing stroke	inch	14.57												
	mm	370												
Space between tie bars	inch	18.9×18.9												
	mm	480×480												
Mold thickness	inch	5.91-18.90												
	mm	150-480												
Ejector stroke	inch	3.94												
	mm	100												
Ejector force	kN	40												
Number of ejectors		5												
INJECTION UNIT														
Model of injection unit(Std./Opt.)	IIU200/IIU200h			IU320/IU320h			IU430/IU430h							
International specification	198			317			427							
	A	B	C	A	B	C	A	B	C					
Screw diameter	inch	1.024	1.181	1.378	1.181	1.378	1.575	1.378	1.575					
	mm	26	30	35	30	35	40	35	40					
Screw L/D ratio	L/D	22	22	20	24	20	20	24	20					
Screw stroke	inch	5.51			6.50			6.69						
	mm	140			165			170						
Shot volume	in³	4.54	6.04	8.22	7.12	9.69	12.65	9.98	13.04					
	cm³	74	99	135	117	159	207	164	214					
Shot weight(PS)	oz	2.4	3.2	4.4	3.8	5.2	6.7	5.3	6.9					
	g	68	91	124	107	146	191	150	197					
Injection pressure	psi	38620	29008	21312	39482	29008	22209	37887	29008					
	Mpa	266	200	147	272	200	153	261	200					
Holding pressure	psi	30896	23206	17049	31586	23206	17767	30310	23206					
	MPa	213	160	118	218	160	123	209	160					
Injection speed (Std./Opt.)	inch/s	7.87/13.78			7.87/13.78			7.87/11.81						
	mm/s	200/350			200/350			200/300						
Injection rate (Std./Opt.)	oz/s	3.46	4.59	6.24	4.59	6.24	8.15	6.24	8.15					
	g/s	98	130	177	130	177	231	177	231					
Screw speed	rpm	400			400			400						
Nozzle contact force	kN	20			30			40						
Heating power	kW	5.9	7.5	7.9	7.3	7.9		8.9						
Total power	kW	35.5/37.9			36.4/52.4			48/56.9						
GENERAL UNIT														
Dry cycle	s	1.66												
Oil pump motor	kW	10												
Max. system pressure	psi	2321												
	MPa	16												
Oil tank capacity	gal	28												
	L	106												
Machine weight	lb	10560			10868			11880						

FF130-N Machine Dimensions

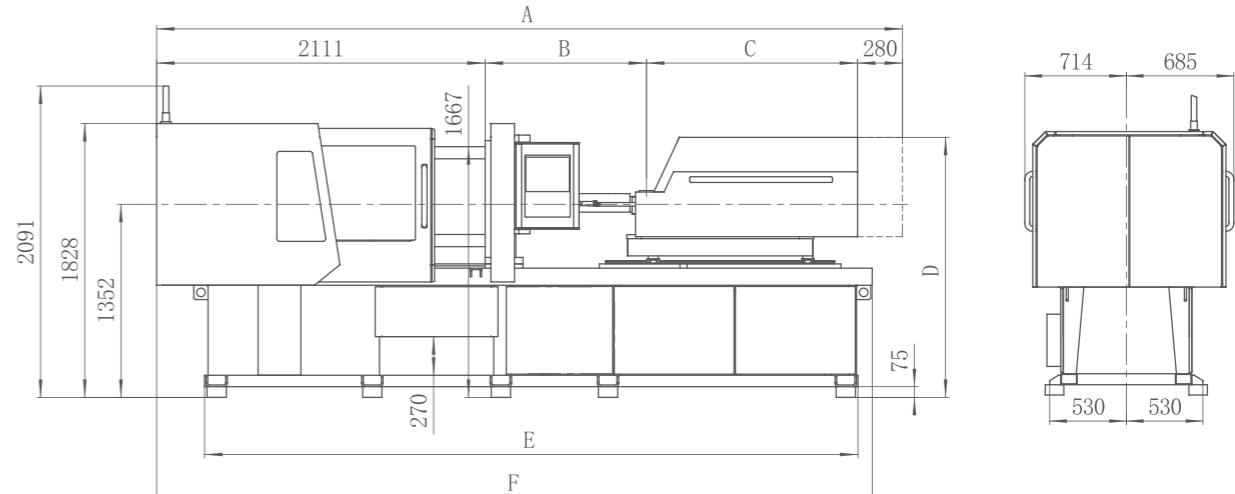

FF130-N Platen Dimensions

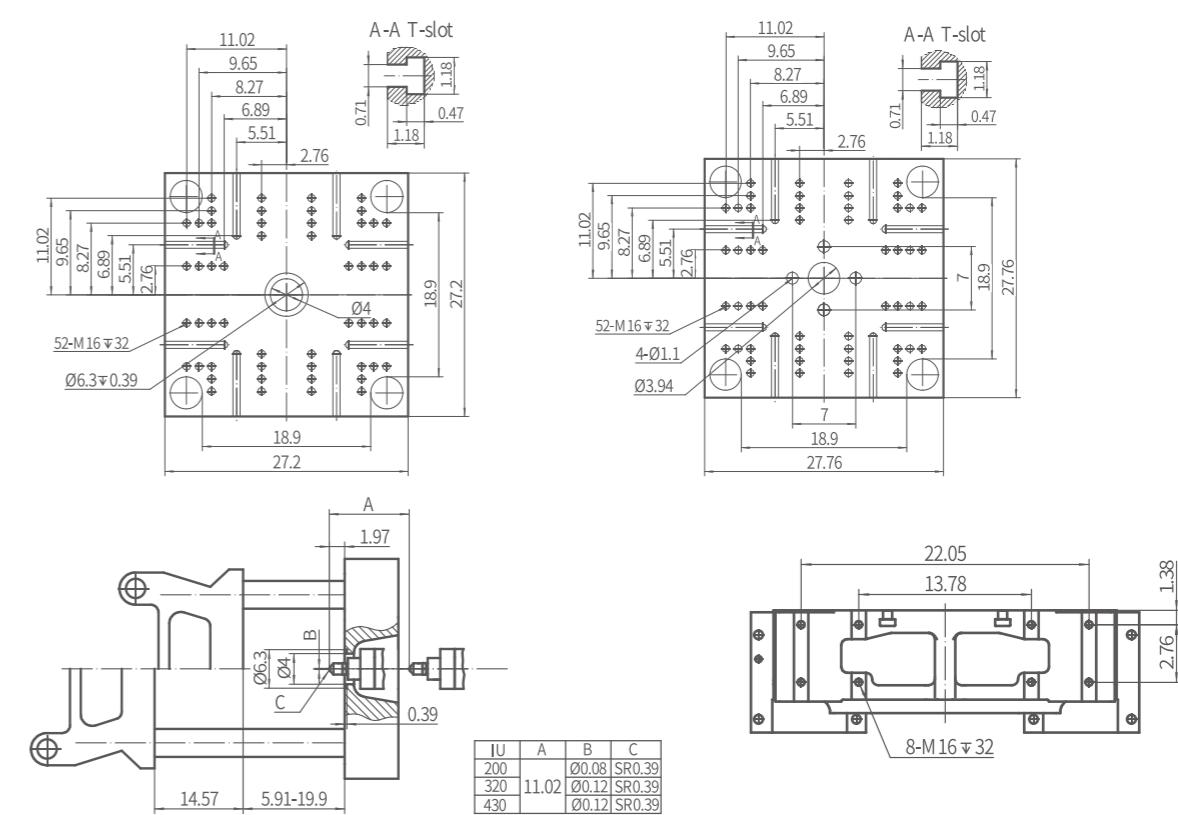


Note: unit in machine dimensions is mm.


FF180-N

CLAMPING UNIT														
Clamping force	kN	1600												
Mold opening/ closing stroke	inch	16.93												
	mm	430												
Space between tie bars	inch	20.9×20.9												
	mm	530×530												
Mold thickness	inch	6.89-20.47												
	mm	175-520												
Ejector stroke	inch	4.92												
	mm	125												
Ejector force	kN	40												
Number of ejectors		5												
INJECTION UNIT														
Model of injection unit(Std./Opt.)		IU320/IU320h			IU430/IU430h			IU670/IU670h						
International specification		317			427			668						
		A	B	C	A	B	C	A	B					
Screw diameter	inch	1.181	1.378	1.575	1.378	1.575	1.693	1.575	1.890					
	mm	30	35	40	35	40	43	40	48					
Screw L/D ratio	L/D	24	20	20	24	20	20	22.3	20					
Screw stroke	inch	6.50			6.69			8.07						
	mm	165			170			205						
Shot volume	in³	7.12	9.69	12.65	9.98	13.04	15.07	15.72	22.64					
	cm³	117	159	207	164	214	247	258	371					
Shot weight(PS)	oz	3.8	5.2	6.7	5.3	6.9	8.0	8.4	12.0					
	g	107	146	191	150	197	227	237	341					
Injection pressure	psi	39482	29008	22209	37887	29008	25101	37594	26107					
	Mpa	272	200	153	261	200	173	259	180					
Holding pressure	psi	31586	23206	17767	30310	23206	20081	30075	20885					
	MPa	218	160	123	209	160	138	207	144					
Injection speed (Std./Opt.)	inch/s	7.87/13.78			7.87/11.81			6.30/9.84						
	mm/s	200/350			200/300			160/250						
Injection rate (Std./Opt.)	oz/s	4.59	6.24	8.15	6.24	8.15	9.42	6.53	9.38					
	g/s	130	177	231	177	231	267	185	266					
Screw speed	rpm	400			400			350						
Nozzle contact force	kN	30			40			40						
Heating power	kW	7.3		7.9	8.9			10.6	10.9					
Total power	kW	36.4/52.4			48/56.9			55.1/61						
GENERAL UNIT														
Dry cycle	s	1.84												
Oil pump motor	kW	10												
Max. system pressure	psi	2321												
	MPa	16												
Oil tank capacity	gal	28												
	L	106												
Machine weight	lb	12870			13860			14036						

FF180-N Machine Dimensions

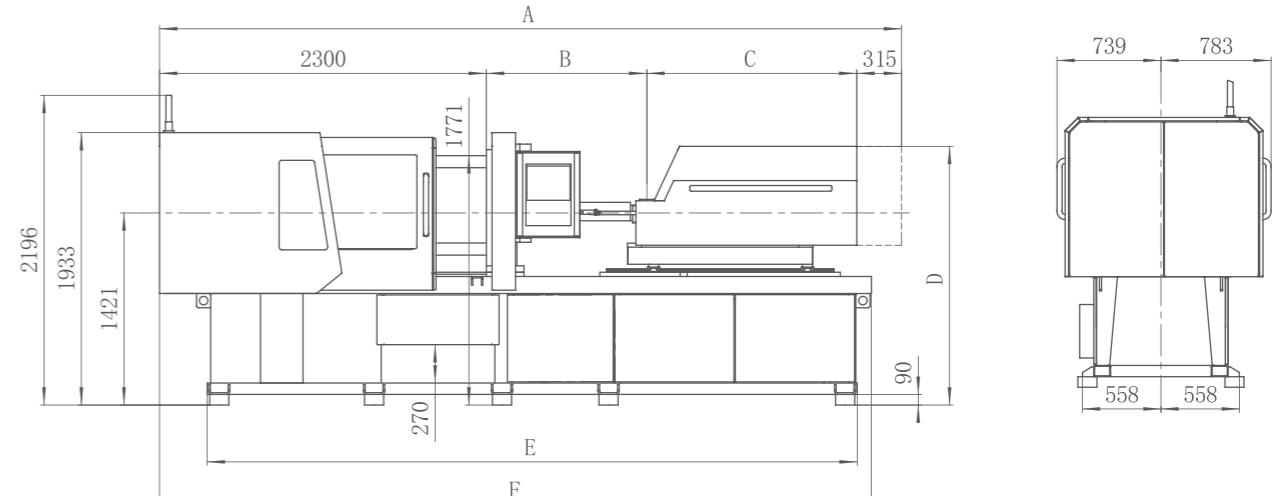

FF180-N Platen Dimensions

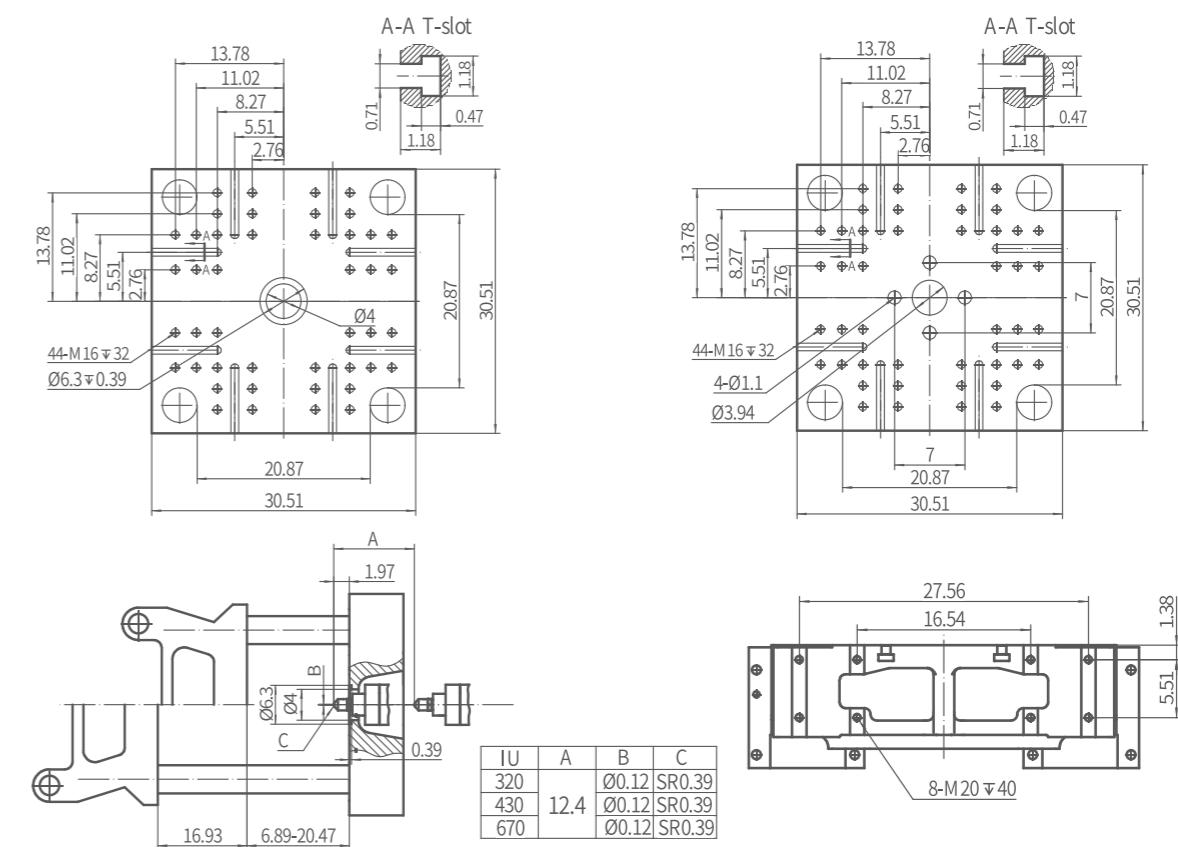


Note: unit in machine dimensions is mm.

FF220-N

CLAMPING UNIT														
Clamping force	kN	2000												
Mold opening/ closing stroke	inch	18.90												
	mm	480												
Space between tie bars	inch	22.8×22.8												
	mm	580×580												
Mold thickness	inch	7.87-22.05												
	mm	200-560												
Ejector stroke	inch	4.92												
	mm	125												
Ejector force	kN	40												
Number of ejectors		9												
INJECTION UNIT														
Model of injection unit(Std./Opt.)	IU430/IU430h			IU670/IU670h			IU930							
International specification	427			668			933							
	A	B	C	A	B	C	A	B	C					
Screw diameter	inch	1.378	1.575	1.693	1.575	1.890	2.087	1.890	2.087	2.362				
	mm	35	40	43	40	48	53	48	53	60				
Screw L/D ratio	L/D	24	20	20	22.3	20	20	22	20	20				
Screw stroke	inch	6.69			8.07			9.25						
	mm	170			205			235						
Shot volume	in³	9.98	13.04	15.07	15.72	22.64	27.60	25.95	31.64	40.55				
	cm³	164	214	247	258	371	452	425	518	664				
Shot weight(PS)	oz	5.3	6.9	8.0	8.4	12.0	14.7	13.8	16.8	21.6				
	g	150	197	227	237	341	416	391	477	611				
Injection pressure	psi	37887	29008	25101	37594	26107	21413	31829	26107	20371				
	Mpa	261	200	173	259	180	148	219	180	140				
Holding pressure	psi	30310	23206	20081	30075	20885	17131	25463	20885	16296				
	MPa	209	160	138	207	144	118	176	144	112				
Injection speed (Std./Opt.)	inch/s	7.87/11.81			6.30/9.84			6.30						
	mm/s	200/300			160/250			160						
Injection rate (Std./Opt.)	oz/s	6.24	8.15	9.42	6.53	9.38	11.46	9.38	11.46	14.67				
	g/s	177	231	267	185	266	325	266	325	416				
Screw speed	rpm	400			350			320						
Nozzle contact force	kN	40			40			60						
Heating power	kW	8.9			10.6	10.9	12.1	13.6		16.7				
Total power	kW	48/56.9			55.1/61			68.1						
GENERAL UNIT														
Dry cycle	s	2.04												
Oil pump motor	kW	10												
Max. system pressure	psi	2321												
	MPa	16												
Oil tank capacity	gal	28												
	L	106												
Machine weight	lb	14806			14982			16390						


FF220-N Machine Dimensions

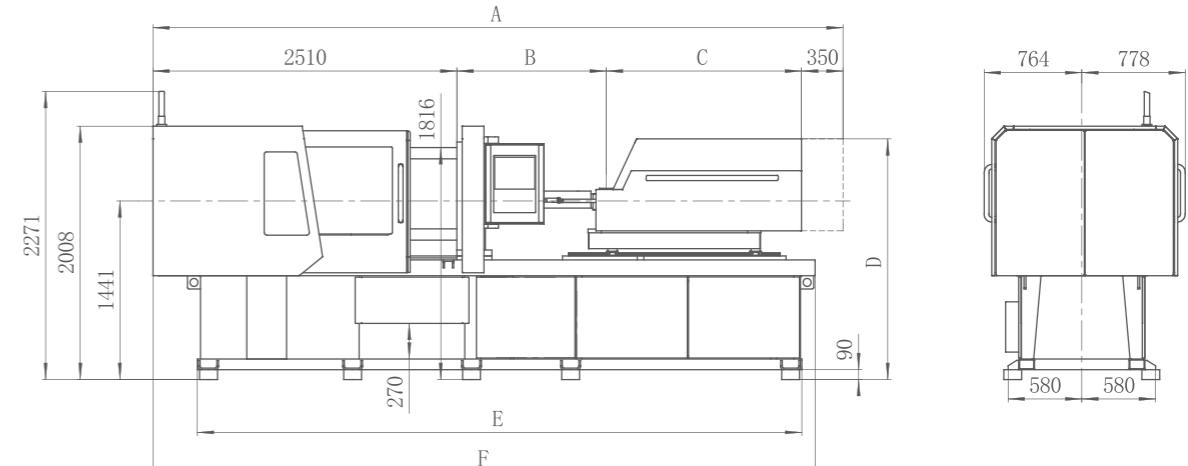

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F
IU430	5322	1007	1455	1837		
IU670	5659/5659/5759	1106/1106/1206	1693	1907	5115	5550
IU930	5949/5949/6093	1219/1219/1363	1870	2022	5415	5850

Note: unit in machine dimensions is mm.

FF220-N Platen Dimensions

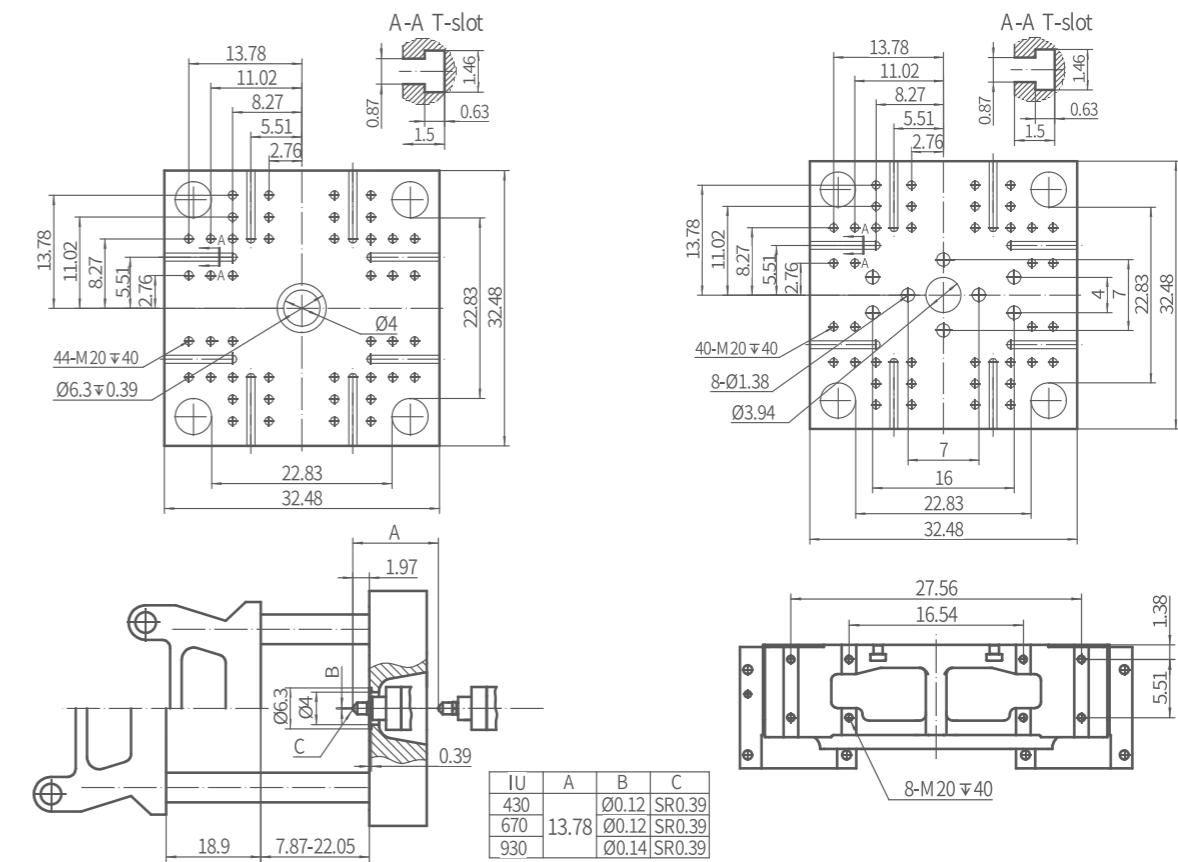


※The Data above were acquired by testing in the factory, only for your reference.

FF260-N


CLAMPING UNIT												
Clamping force	kN	2400										
Mold opening/ closing stroke	inch	20.87										
	mm	530										
Space between tie bars	inch	24.8×24.8										
	mm	630×630										
Mold thickness	inch	8.66-23.62										
	mm	220-600										
Ejector stroke	inch	5.91										
	mm	150										
Ejector force	kN	55.6										
Number of ejectors		13										
INJECTION UNIT												
Model of injection unit(Std./Opt.)	IU670/IU670h			IU930			IU1350					
International specification	668			933			1349					
	A	B	C	A	B	C	A	B	C			
Screw diameter	inch	1.575	1.890	2.087	1.890	2.087	2.362	2.087	2.362			
	mm	40	48	53	48	53	60	53	60			
Screw L/D ratio	L/D	22.3	20	20	22	20	20	22.6	20			
Screw stroke	inch	8.07			9.25			10.43				
	mm	205			235			265				
Shot volume	in³	15.72	22.64	27.60	25.95	31.64	40.55	35.68	45.72			
	cm³	258	371	452	425	518	664	585	749			
Shot weight(PS)	oz	8.4	12.0	14.7	13.8	16.8	21.6	19.0	24.3			
	g	237	341	416	391	477	611	538	689			
Injection pressure	psi	37594	26107	21413	31829	26107	20371	33458	26107			
	Mpa	259	180	148	219	180	140	231	180			
Holding pressure	psi	30075	20885	17131	25463	20885	16296	26767	20885			
	MPa	207	144	118	176	144	112	185	144			
Injection speed (Std./Opt.)	inch/s	6.30/9.84			6.30			6.30				
	mm/s	160/250			160			160				
Injection rate (Std./Opt.)	oz/s	6.53	9.38	11.46	9.38	11.46	14.67	11.46	14.67			
	g/s	185	266	325	266	325	416	325	416			
Screw speed	rpm	350			320			300				
Nozzle contact force	kN	40			60			60				
Heating power	kW	10.6	10.9	12.1	13.6	16.7	16.4	18.4	18.8			
Total power	kW	55.1/61			68.1			72.9				
GENERAL UNIT												
Dry cycle	s	2.36										
Oil pump motor	kW	15										
Max. system pressure	psi	2538										
	MPa	17.5										
Oil tank capacity	gal	28										
	L	106										
Machine weight	lb	20240			21648			10950				

FF260-N Machine Dimensions

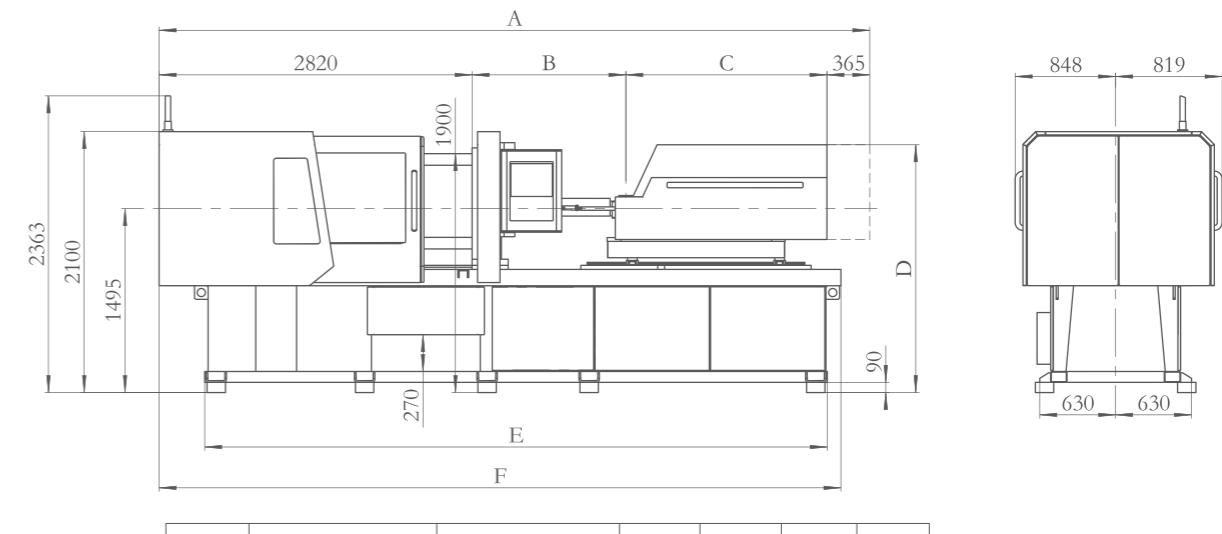

Note: unit in machine dimensions is mm.

FF260-N Platen Dimensions

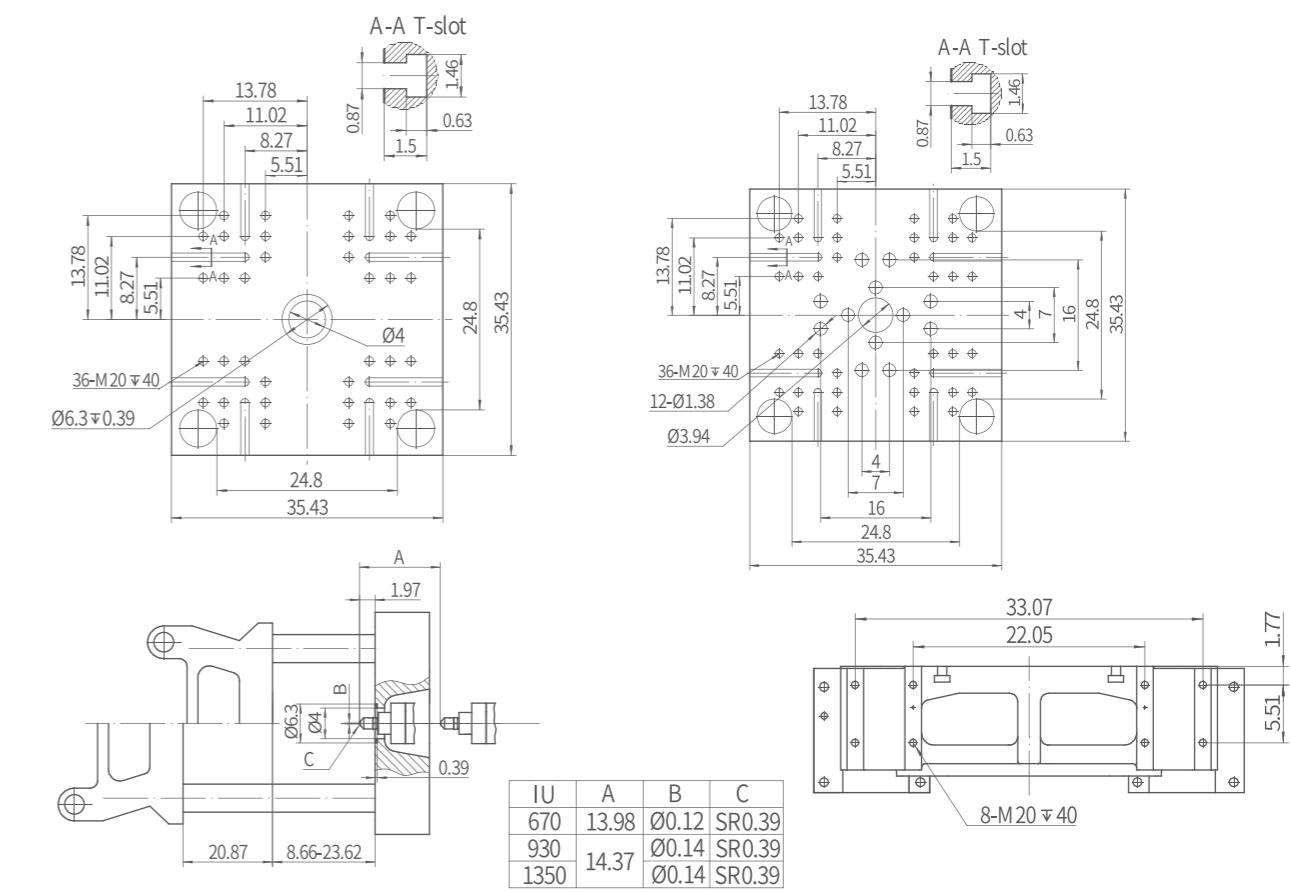


※The Data above were acquired by testing in the factory, only for your reference.

FF330-N


CLAMPING UNIT														
Clamping force	kN	3000												
Mold opening/ closing stroke	inch	24.02												
	mm	610												
Space between tie bars	inch	28.3×28.3												
	mm	720×720												
Mold thickness	inch	9.84-25.60												
	mm	250-650												
Ejector stroke	inch	5.91												
	mm	150												
Ejector force	kN	55.6												
Number of ejectors		13												
INJECTION UNIT														
Model of injection unit(Std./Opt.)		IU930		IU1350		IU1930								
International specification		933			1349			1928						
		A	B	C	A	B	C	A	B					
Screw diameter	inch	1.890	2.087	2.362	2.087	2.362	2.677	2.362	2.677					
	mm	48	53	60	53	60	68	60	68					
Screw L/D ratio	L/D	22	20	20	22.6	20	20	22.6	20					
Screw stroke	inch	9.25			10.43			10.43						
	mm	235			265			265						
Shot volume	in³	25.95	31.64	40.55	35.68	45.72	58.73	45.72	58.73					
	cm³	425	518	664	585	749	962	749	962					
Shot weight(PS)	oz	13.8	16.8	21.6	19.0	24.3	31.2	24.3	31.2					
	g	391	477	611	538	689	885	689	885					
Injection pressure	psi	31829	26107	20371	33458	26107	20325	33533	26107					
	Mpa	219	180	140	231	180	140	231	180					
Holding pressure	psi	25463	20885	16296	26767	20885	16260	26826	20885					
	MPa	176	144	112	185	144	112	185	144					
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30						
	mm/s	160			160			160						
Injection rate (Std./Opt.)	oz/s	9.38	11.46	14.67	11.46	14.67	18.87	14.67	18.87					
	g/s	266	325	416	325	416	535	416	535					
Screw speed	rpm	320			300			250						
Nozzle contact force	kN	60			60			60						
Heating power	kW	13.6	16.7	16.4	18.8	22.2	23.5							
Total power	kW	68.1			72.9			126.2						
GENERAL UNIT														
Dry cycle	s	2.5												
Oil pump motor	kW	15												
Max. system pressure	psi	2538												
	MPa	17.5												
Oil tank capacity	gal	28												
	L	106												
Machine weight	lb	25014			27456			28380						

FF330-N Machine Dimensions

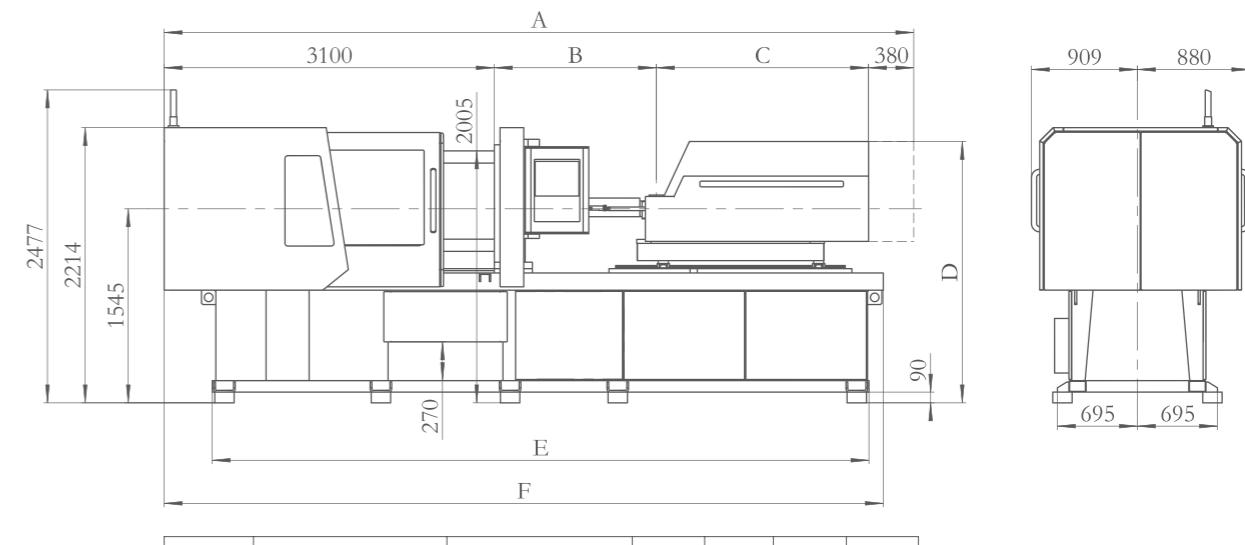

Note: unit in machine dimensions is mm.

FF330-N Platen Dimensions

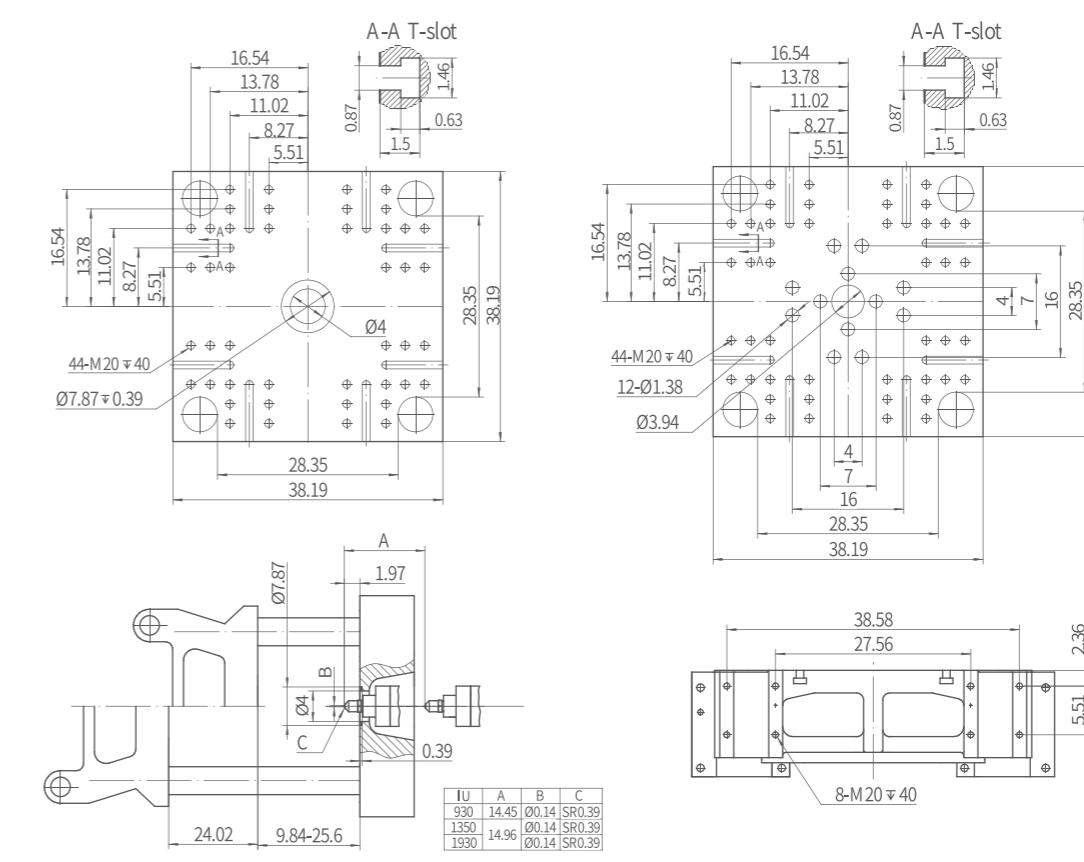


※The Data above were acquired by testing in the factory, only for your reference.

FF420-N


CLAMPING UNIT														
Clamping force	kN	3800												
Mold opening/ closing stroke	inch	27.95												
	mm	710												
Space between tie bars	inch	32.3x32.3												
	mm	820x820												
Mold thickness	inch	11.42-28.35												
	mm	290-720												
Ejector stroke	inch	7.87												
	mm	200												
Ejector force	kN	99												
Number of ejectors		13												
INJECTION UNIT														
Model of injection unit(Std./Opt.)		IU1350		IU1930		IU2700								
International specification		1349			1928			2695						
	A	B	C	A	B	C	A	B	C					
Screw diameter	inch	2.087	2.362	2.677	2.362	2.677	2.992	2.677	2.992					
	mm	53	60	68	60	68	76	68	76					
Screw L/D ratio	L/D	22.6	20	20	22.6	20	20	22.3	20					
Screw stroke	inch	10.43			11.61			12.99						
	mm	265			295			330						
Shot volume	in ³	35.68	45.72	58.73	50.90	65.38	81.67	73.13	91.35					
	cm ³	585	749	962	834	1071	1338	1198	1497					
Shot weight(PS)	oz	19.0	24.3	31.2	27.1	34.8	43.4	38.9	48.6					
	g	538	689	885	767	986	1231	1103	1377					
Injection pressure	psi	33458	26107	20325	33533	26107	20900	32611	26107					
	Mpa	231	180	140	231	180	144	225	180					
Holding pressure	psi	26767	20885	16260	26826	20885	16720	26089	20885					
	MPa	185	144	112	185	144	115	180	144					
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30						
	mm/s	160			160			160						
Injection rate (Std./Opt.)	oz/s	11.46	14.67	18.87	14.67	18.87	23.56	18.87	23.56					
	g/s	325	416	535	416	535	668	535	668					
Screw speed	rpm	300			250			200						
Nozzle contact force	kN	60			60			100						
Heating power	kW	16.4	18.8	22.2	23.5	26.3	30.9							
Total power	kW	72.9			126.2			133.9						
GENERAL UNIT														
Dry cycle	s	2.8												
Oil pump motor	kW	15												
Max. system pressure	psi	2538												
	MPa	17.5												
Oil tank capacity	gal	50												
	L	189												
Machine weight	lb	37136	38060	41118										

FF420-N Machine Dimensions

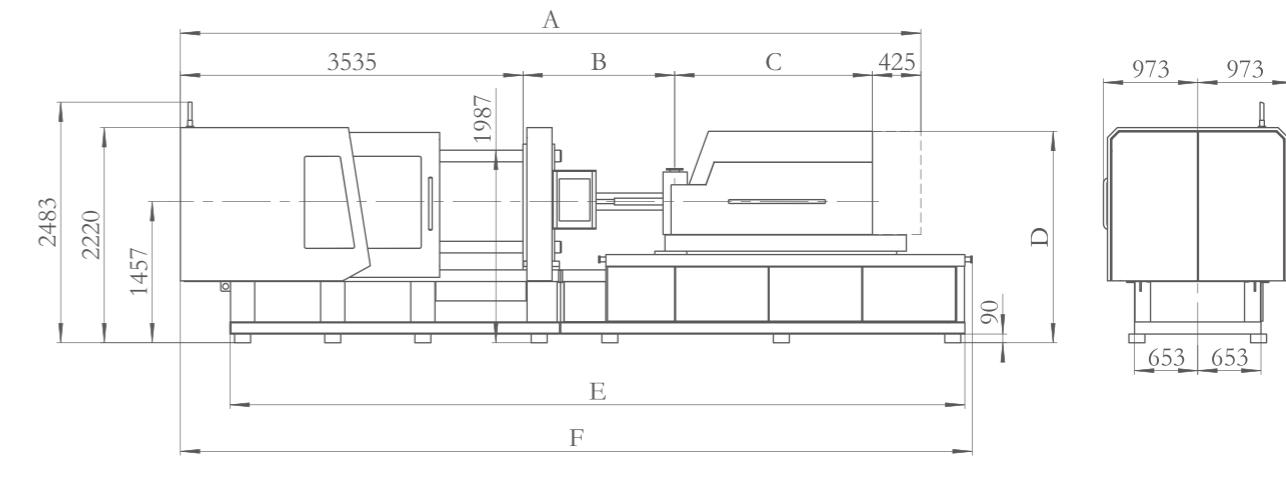

Note: unit in machine dimensions is mm.

FF420-N Platen Dimensions

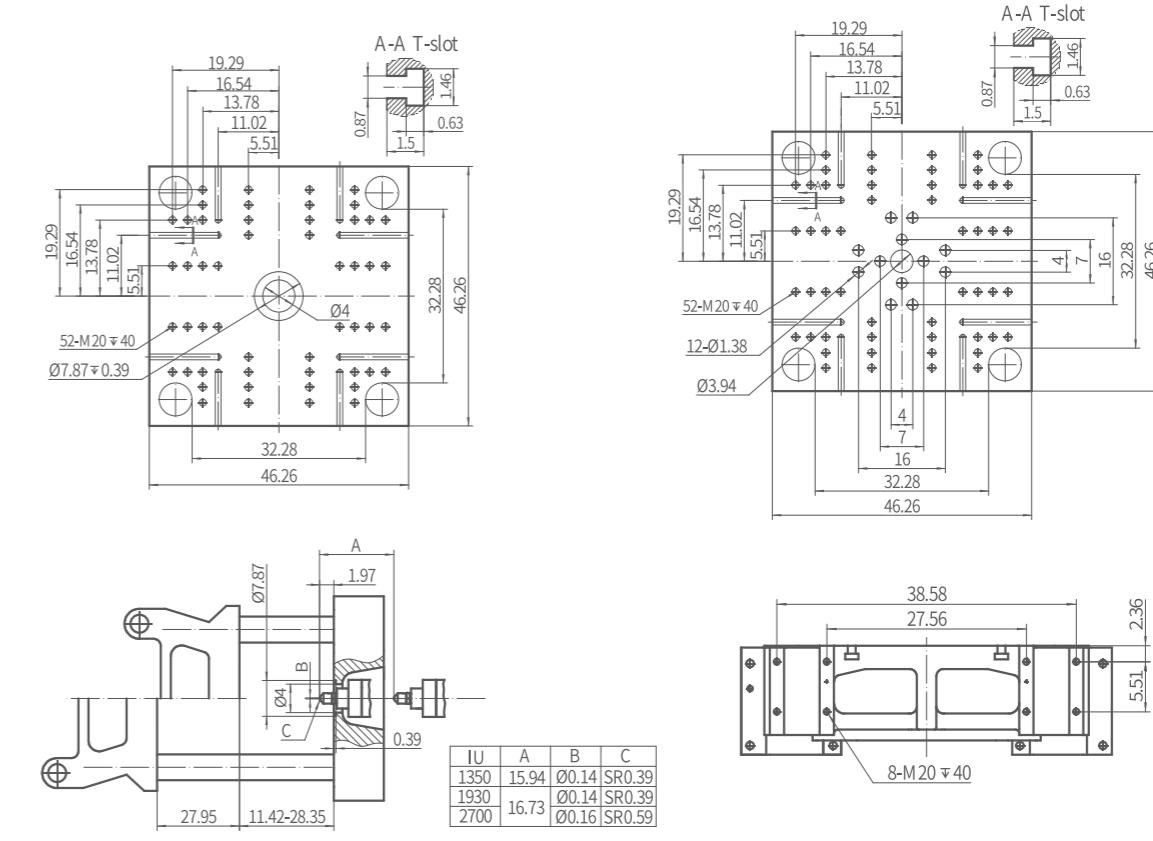


※The Data above were acquired by testing in the factory, only for your reference.

FF510-N

CLAMPING UNIT														
Clamping force	kN	4600												
Mold opening/ closing stroke	inch	31.89												
	mm	810												
Space between tie bars	inch	36.2×36.2												
	mm	920×920												
Mold thickness	inch	12.99-31.89												
	mm	330-810												
Ejector stroke	inch	7.87												
	mm	200												
Ejector force	kN	99												
Number of ejectors		17												
INJECTION UNIT														
Model of injection unit(Std./Opt.)		IU1930			IU2700			IU3700						
International specification		1928			2695			3691						
		A	B	C	A	B	C	A	B					
Screw diameter	inch	2.362	2.677	2.992	2.677	2.992	3.307	2.992	3.307					
	mm	60	68	76	68	76	84	76	84					
Screw L/D ratio	L/D	22.6	20	20	22.3	20	20	22.1	20					
Screw stroke	inch	11.61			12.99			14.57						
	mm	295			330			370						
Shot volume	in³	50.90	65.38	81.67	73.13	91.35	111.60	102.43	125.13					
	cm³	834	1071	1338	1198	1497	1829	1678	2050					
Shot weight(PS)	oz	27.1	34.8	43.4	38.9	48.6	59.3	54.5	66.5					
	g	767	986	1231	1103	1377	1682	1544	1886					
Injection pressure	psi	33533	26107	20900	32611	26107	21371	31892	26107					
	Mpa	231	180	144	225	180	147	220	180					
Holding pressure	psi	26826	20885	16720	26089	20885	17097	25514	20885					
	MPa	185	144	115	180	144	118	176	144					
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30						
	mm/s	160			160			160						
Injection rate (Std./Opt.)	oz/s	14.67	18.87	23.56	18.87	23.56	28.78	23.56	28.78					
	g/s	416	535	668	535	668	816	668	816					
Screw speed	rpm	250			200			180						
Nozzle contact force	kN	60			100			100						
Heating power	kW	22.2		23.5	26.3		30.9	33.1						
Total power	kW	126.2			133.9			153.4						
GENERAL UNIT														
Dry cycle	s	3.1												
Oil pump motor	kW	25												
Max. system pressure	psi	2538												
	MPa	17.5												
Oil tank capacity	gal	50												
	L	189												
Machine weight	lb	47212			50292			50930						


FF510-N Machine Dimensions

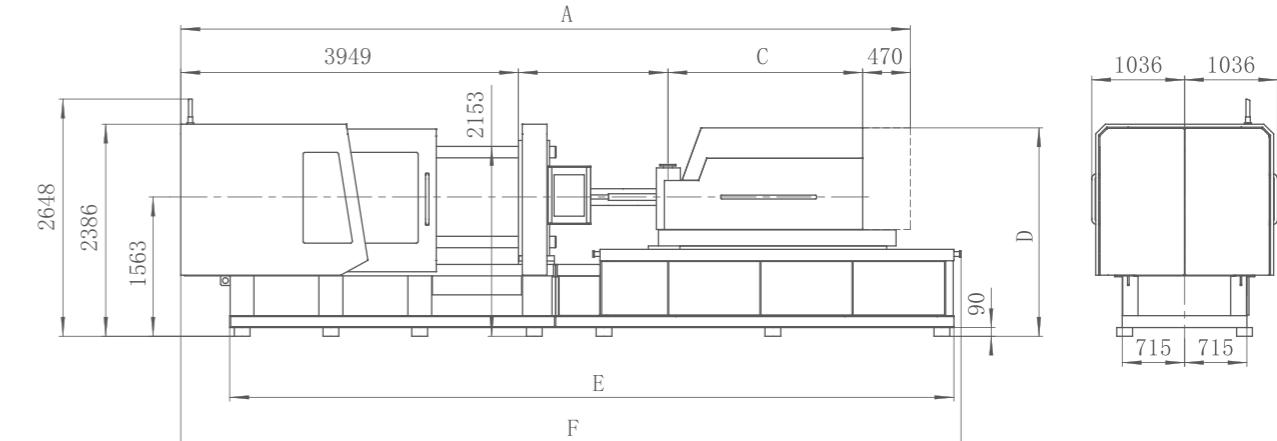

Model	A(A/B/C Screw)	B(A/B/C Screw)	C	D	E	F	
IU1930	8024/8024/8199	1565/1565/1740	2040		2288	8041	8628
IU2700	8533/8533/8706	1769/1769/1942	2345				
IU3700	8837/8837/8997	1953/1953/2113	2465	2364	8221	8808	

Note: unit in machine dimensions is mm.

FF510-N Platen Dimensions

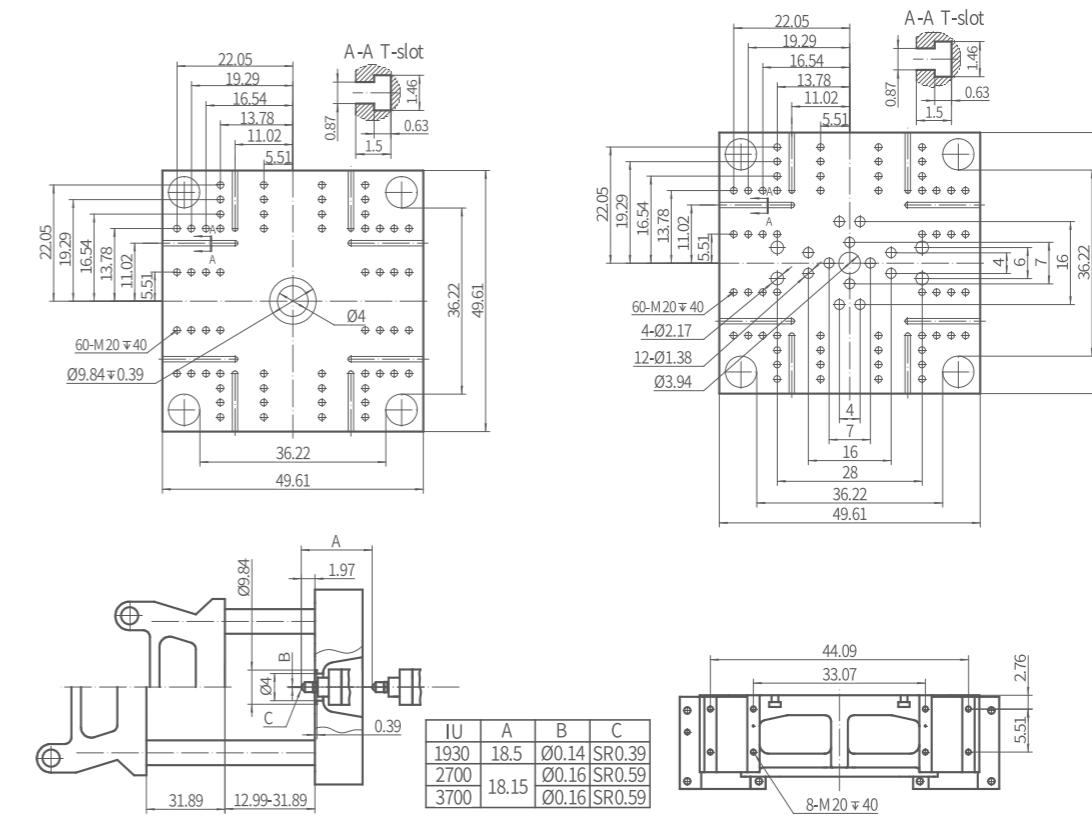

※The Data above were acquired by testing in the factory, only for your reference.


FF600-N

CLAMPING UNIT												
CLAMPING UNIT												
Clamping force												
kN												
5500												
Mold opening/ closing stroke												
inch												
35.43												
mm												
900												
Space between tie bars												
inch												
38.1x38.1												
mm												
970x970												
Mold thickness												
inch												
15.75-35.43												
mm												
400-900												
Ejector stroke												
inch												
7.87												
mm												
200												
Ejector force												
kN												
155												
Number of ejectors												
21												
INJECTION UNIT												
Model of injection unit(Std./Opt.)												
IU1350				IU1930			IU2700			IU3700		
International specification				1349			1928			2695		
A				B			C			D		
inch				2.09			2.36			2.68		
mm				53			60			68		
Screw diameter				2.36			2.68			2.99		
inch				1.10			1.10			1.10		
mm				104.17			120.00			137.80		
Screw L/D ratio				20			20			20		
inch				10.43			11.61			12.99		
mm				265			295			330		
Screw stroke				inch			mm			inch		
inch				2.09			53			1.10		
Shot volume				53			60			68		
in³				585			749			962		
cm³				834			1071			1338		
Shot weight(PS)				oz			18.97			24.32		
g				538			689			885		
Injection pressure				psi			33457			26105		
Mpa				21			20324			33531		
Holding pressure				psi			26765			20884		
MPa				18.5			14.4			16.25		
Injection speed (Std./Opt.)				inch/s			6.30			6.30		
mm/s				160			160			160		

FF710-N


CLAMPING UNIT																				
Clamping force	kN	6500																		
Mold opening/ closing stroke	inch	39.37																		
	mm	1000																		
Space between tie bars	inch	42.52×42.52																		
	mm	1080×1080																		
Mold thickness	inch	16.54-39.37																		
	mm	420-1000																		
Ejector stroke	inch	8.27																		
	mm	210																		
Ejector force	kN	220																		
Number of ejectors		21																		
INJECTION UNIT																				
Model of injection unit(Std./Opt.)	IU1930			IU2700			IU3700			IU4800										
International specification	1928			2695			3691			4800										
	A	B	C	A	B	C	A	B	C	A	B	C								
Screw diameter	inch	2.36	2.68	2.99	2.68	2.99	3.31	2.99	3.31	3.62	3.31	3.62								
	mm	60	68	76	68	76	84	76	84	92	84	92								
Screw L/D ratio	L/D	22.6	20	20	22.3	20	20	22.1	20	20	21.9	22								
Screw stroke	inch	11.61			12.99			14.57			15.75									
	mm	295			330			370			400									
Shot volume	in³	50.9	65.4	81.7	73.1	91.4	111.6	102.4	125.1	150.1	135.3	162.3								
	cm³	834	1071	1338	1198	1497	1829	1678	2050	2460	2217	2659								
Shot weight(PS)	oz	27.07	34.77	43.43	38.89	48.58	59.35	54.47	66.54	79.82	71.94	86.29								
	g	767	986	1231	1103	1377	1682	1544	1886	2263	2039	2446								
Injection pressure	psi	33531	26105	20899	32609	26105	21370	31891	26105	21763	31315	26105								
	Mpa	231	180	144	225	180	147	220	180	150	216	180								
Holding pressure	psi	26825	20884	16719	26087	20884	17096	25512	20884	17410	25052	20884								
	MPa	185	144	115	180	144	118	176	144	120	173	144								
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30			6.30									
	mm/s	160			160			160			160									
Injection rate (Std./Opt.)	oz/s	14.67	18.87	23.56	18.87	23.56	28.78	23.56	28.78	34.53	28.78	34.53								
	g/s	416	535	668	535	668	816	668	816	979	816	979								
Screw speed	rpm	250			200			180			150									
Nozzle contact force	kN	60			60			100			100									
Heating power	kW	22.2		23.5	26.3		30.9	33.1		36.1	37.5	41.2								
Total power	kW	126.2			133.9			153.4			155.6									
GENERAL UNIT																				
Dry cycle	s	3.58																		
Oil pump motor	kW	51																		
Max. system pressure	psi	2538																		
	MPa	17.5																		
Oil tank capacity	gal	79.28																		
	L	300																		
Machine weight	lb	73657			75641			76302			78065									

FF710-N Machine Dimensions

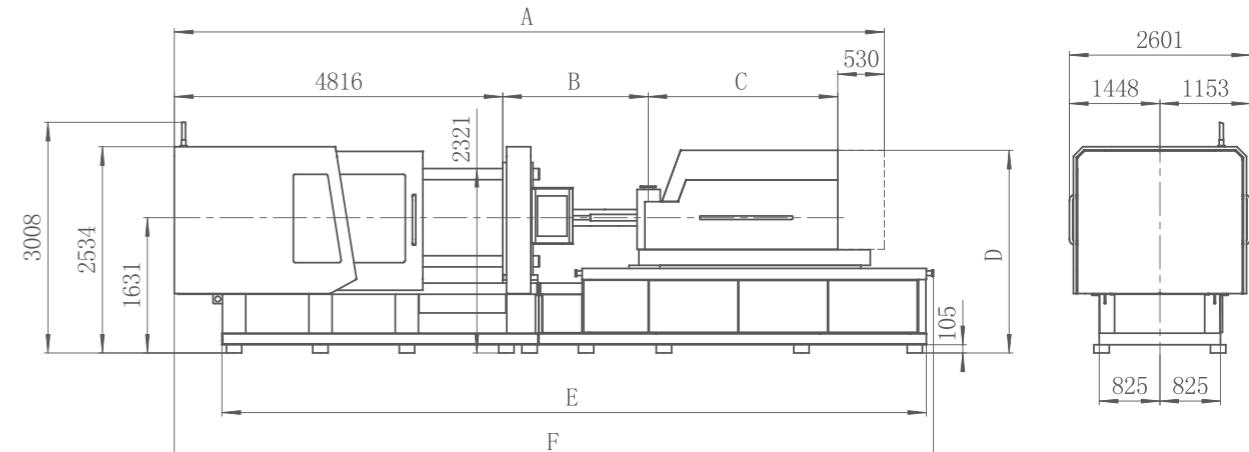

Note: unit in machine dimensions is mm.

FF710-N Platen Dimensions

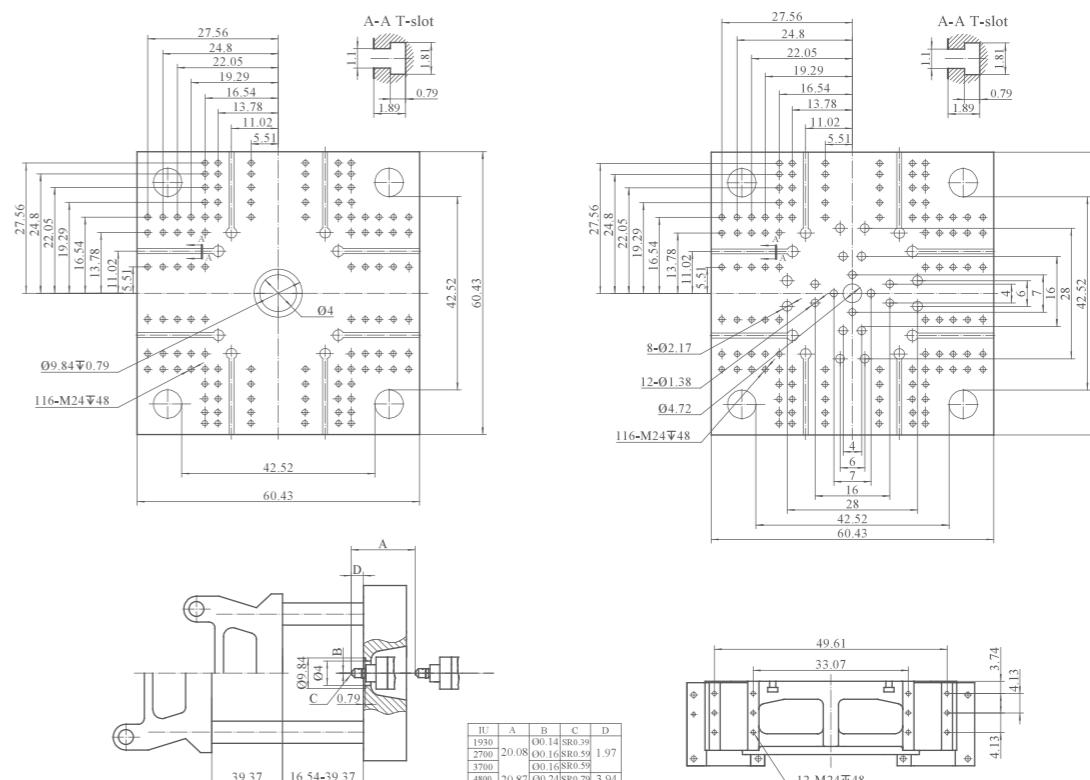


※The Data above were acquired by testing in the factory, only for your reference.

FF930-N


CLAMPING UNIT																		
Clamping force	kN	8500																
Mold opening/ closing stroke	inch	47.24																
	mm	1200																
Space between tie bars	inch	44.09×44.09																
	mm	1120×1120																
Mold thickness	inch	19.69-43.31																
	mm	500-1100																
Ejector stroke	inch	8.27																
	mm	210																
Ejector force	kN	230																
Number of ejectors		21																
INJECTION UNIT																		
Model of injection unit(Std./Opt.)	IU2700			IU3700			IU4800			IU6800								
International specification	2695			3691			4800			6800								
	A	B	C	A	B	C	A	B	C	A	B	C						
Screw diameter	inch	2.68	2.99	3.31	2.99	3.31	3.62	3.31	3.62	3.94	3.62	3.94						
	mm	68	76	84	76	84	92	84	92	100	92	100						
Screw L/D ratio	L/D	22.3	20	20	22.1	20	20	21.9	22	21.6	21.7	22						
Screw stroke	inch	12.99			14.57			15.75			18.90							
	mm	330			370			400			480							
Shot volume	in³	73.1	91.4	111.6	102.4	125.1	150.1	135.3	162.3	191.7	194.7	230.1						
	cm³	1198	1497	1829	1678	2050	2460	2217	2659	3142	3191	3770						
Shot weight(PS)	oz	38.89	48.58	59.35	54.47	66.54	79.82	71.94	86.29	101.95	103.55	122.34						
	g	1103	1377	1682	1544	1886	2263	2039	2446	2890	2936	3468						
Injection pressure	psi	32609	26105	21370	31891	26105	21763	31315	26105	22096	30891	26105						
	Mpa	225	180	147	220	180	150	216	180	152	213	180						
Holding pressure	psi	26087	20884	17096	25512	20884	17410	25052	20884	17676	24713	20884						
	MPa	180	144	118	176	144	120	173	144	122	170	144						
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30			6.30							
	mm/s	160			160			160			160							
Injection rate (Std./Opt.)	oz/s	18.87	23.56	28.78	23.56	28.78	34.53	28.78	34.53	40.78	34.53	40.78						
	g/s	535	668	816	668	816	979	816	979	1156	979	1156						
Screw speed	rpm	200			180			150			150							
Nozzle contact force	kN	60			100			100			100							
Heating power	kW	26.3	30.9	33.1	36.1	37.5	41.2	45	41.7	47.2	54.1							
Total power	kW	133.9			153.4			155.6			214.2							
GENERAL UNIT																		
Dry cycle	s	3.84																
Oil pump motor	kW	51																
Max. system pressure	psi	2538																
	MPa	17.5																
Oil tank capacity	gal	79.28																
	L	300																
Machine weight	lb	89636	90297	91399	94926													

FF930-N Machine Dimensions

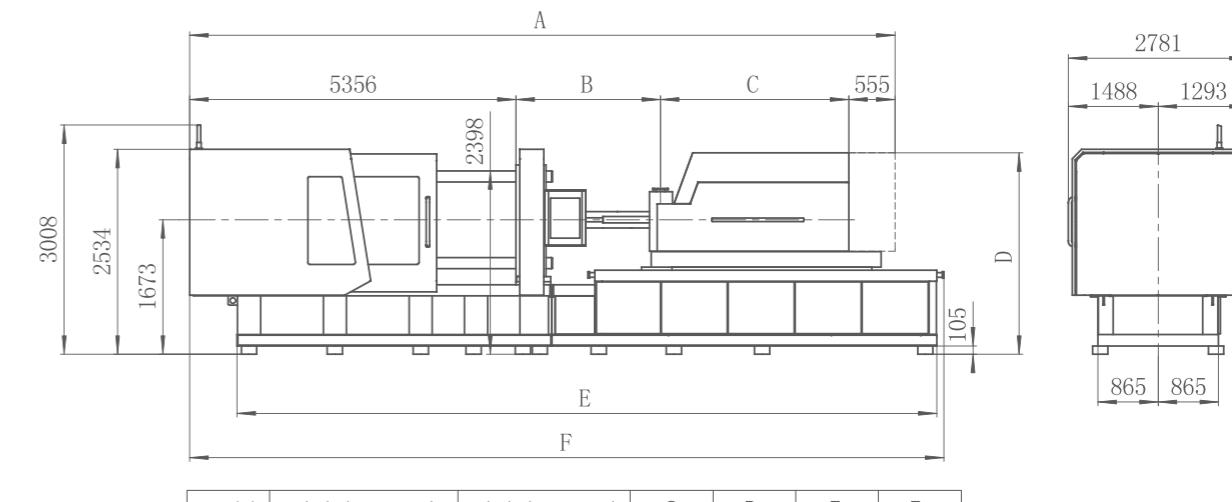

Note: unit in machine dimensions is mm.

FF930-N Platen Dimensions

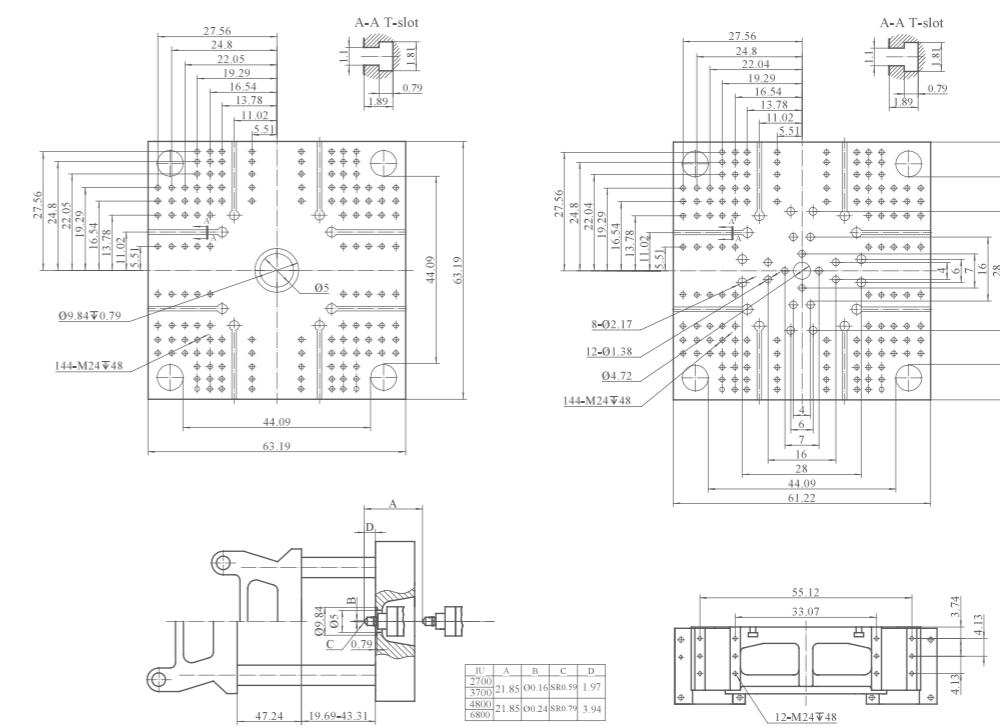


*The Data above were acquired by testing in the factory, only for your reference.


FF1180-N

CLAMPING UNIT																		
Clamping force	kN	10800																
Mold opening/ closing stroke	inch	51.18																
	mm	1300																
Space between tie bars	inch	51.97×51.97																
	mm	1320×1320																
Mold thickness	inch	19.69-47.24																
	mm	500-1200																
Ejector stroke	inch	8.27																
	mm	210																
Ejector force	kN	230																
Number of ejectors		29																
INJECTION UNIT																		
Model of injection unit(Std./Opt.)	IU3700			IU4800			IU6800			IU9000								
International specification	3691			4800			6800			9000								
	A	B	C	A	B	C	A	B	C	A	B	C						
Screw diameter	inch	2.99	3.31	3.62	3.31	3.62	3.94	3.62	3.94	4.25	3.94	4.25						
	mm	76	84	92	84	92	100	92	100	108	100	108						
Screw L/D ratio	L/D	22.1	20	20	21.9	22	21.6	21.7	22	21.5	21.6	22						
Screw stroke	inch	14.57			15.75			18.90			21.65							
	mm	370			400			480			550							
Shot volume	in³	102.4	125.1	150.1	135.3	162.3	191.7	194.7	230.1	268.3	263.6	307.5						
	cm³	1678	2050	2460	2217	2659	3142	3191	3770	4397	4320	5038						
Shot weight(PS)	oz	54.47	66.54	79.82	71.94	86.29	101.95	103.55	122.34	142.70	140.19	163.51						
	g	1544	1886	2263	2039	2446	2890	2936	3468	4045	3974	4635						
Injection pressure	psi	31891	26105	21763	31315	26105	22096	30891	26105	22381	30456	26105						
	Mpa	220	180	150	216	180	152	213	180	154	210	180						
Holding pressure	psi	25512	20884	17410	25052	20884	17676	24713	20884	17905	24365	20884						
	MPa	176	144	120	173	144	122	170	144	123	168	144						
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30			6.30							
	mm/s	160			160			160			160							
Injection rate (Std./Opt.)	oz/s	23.56	28.78	34.53	28.78	34.53	40.78	34.53	40.78	47.55	40.78	47.55						
	g/s	668	816	979	816	979	1156	979	1156	1348	1156	1348						
Screw speed	rpm	180			150			150			150							
Nozzle contact force	kN	100			100			120			120							
Heating power	kW	33.1	36.1	37.5	41.2	45	41.7	47.2	54.1	53.7	58.9	65.9						
Total power	kW	153.4			155.6			214.2			306.1							
GENERAL UNIT																		
Dry cycle	s	4.42																
Oil pump motor	kW	51																
Max. system pressure	psi	2538																
	MPa	17.5																
Oil tank capacity	gal	79.28																
	L	300																
Machine weight	lb	121418	122520	126046	127809													

FF1180-N Machine Dimensions

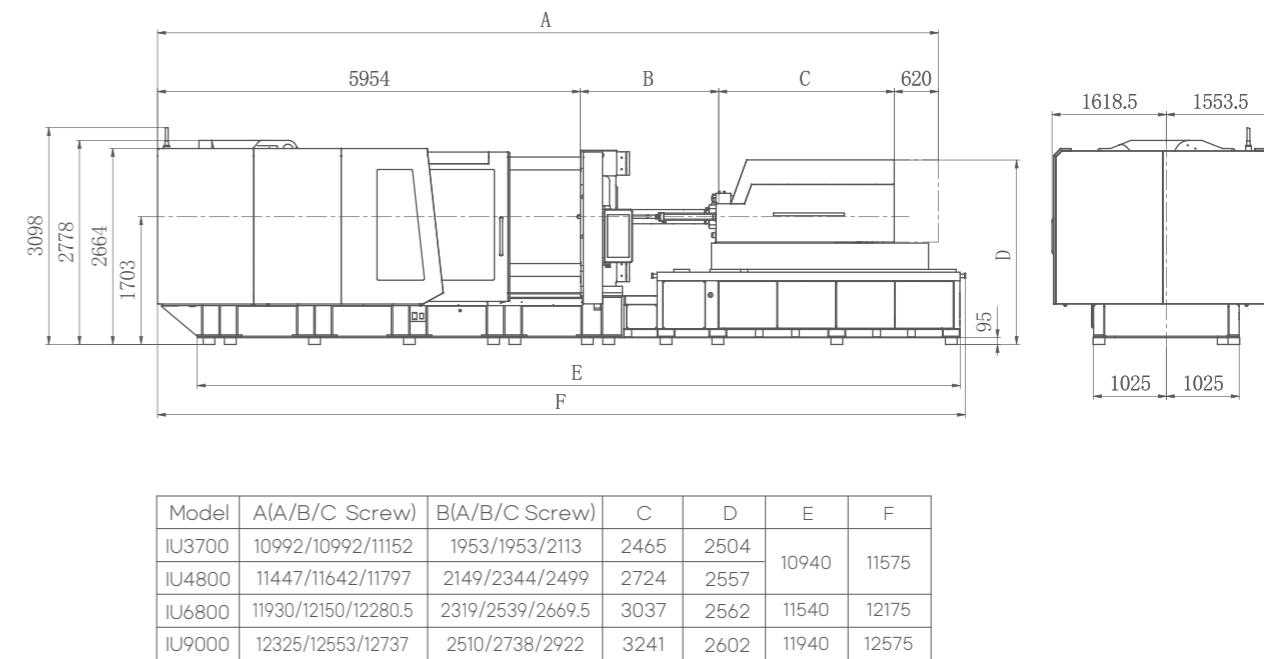

FF1180-N Platen Dimensions

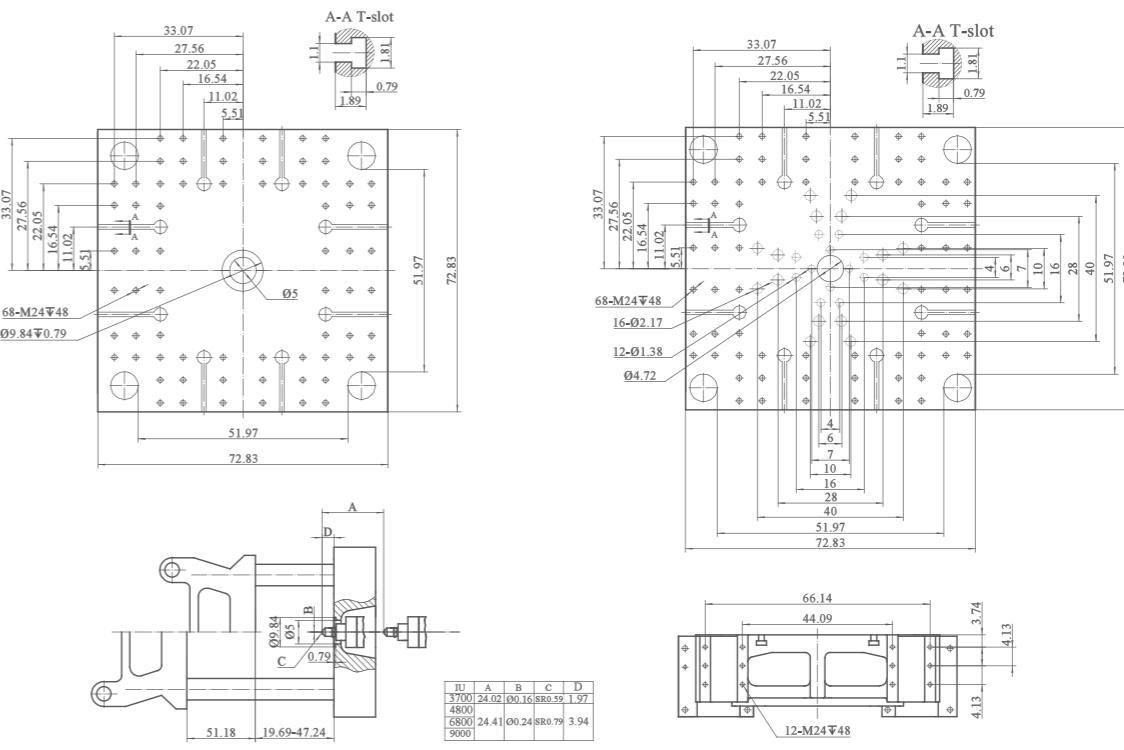


※The Data above were acquired by testing in the factory, only for your reference.


FF1510-N

CLAMPING UNIT																		
Clamping force	kN	13800																
Mold opening/ closing stroke	inch	59.06																
	mm	1500																
Space between tie bars	inch	61.02×57.08																
	mm	1550×1450																
Mold thickness	inch	25.59-51.18																
	mm	650-1300																
Ejector stroke	inch	9.84																
	mm	250																
Ejector force	kN	330																
Number of ejectors		25																
INJECTION UNIT																		
Model of injection unit(Std./Opt.)	IU3700			IU4800			IU6800			IU9000								
International specification	3691			4800			6800			9000								
	A	B	C	A	B	C	A	B	C	A	B	C						
Screw diameter	inch	2.99	3.31	3.62	3.31	3.62	3.94	3.62	3.94	4.25	3.94	4.25						
	mm	76	84	92	84	92	100	92	100	108	100	108						
Screw L/D ratio	L/D	22.1	20	20	21.9	22	21.6	21.7	22	21.5	21.6	22						
Screw stroke	inch	14.57			15.75			18.90			21.65							
	mm	370			400			480			550							
Shot volume	in ³	102.4	125.1	150.1	135.3	162.3	191.7	194.7	230.1	268.3	263.6	307.5						
	cm ³	1678	2050	2460	2217	2659	3142	3191	3770	4397	4320	5038						
Shot weight(PS)	oz	54.47	66.54	79.82	71.94	86.29	101.95	103.55	122.34	142.70	140.19	163.51						
	g	1544	1886	2263	2039	2446	2890	2936	3468	4045	3974	4635						
Injection pressure	psi	31891	26105	21763	31315	26105	22096	30891	26105	22381	30456	26105						
	Mpa	220	180	150	216	180	152	213	180	154	210	180						
Holding pressure	psi	25512	20884	17410	25052	20884	17676	24713	20884	17905	24365	20884						
	MPa	176	144	120	173	144	122	170	144	123	168	144						
Injection speed (Std./Opt.)	inch/s	6.30			6.30			6.30			6.30							
	mm/s	160			160			160			160							
Injection rate (Std./Opt.)	oz/s	23.56	28.78	34.53	28.78	34.53	40.78	34.53	40.78	47.55	40.78	47.55						
	g/s	668	816	979	816	979	1156	979	1156	1348	1156	1348						
Screw speed	rpm	180			150			150			150							
Nozzle contact force	kN	100			100			120			120							
Heating power	kW	33.1	36.1	37.5	41.2	45	41.7	47.2	54.1	53.7	58.9	65.9						
Total power	kW	153.4			155.6			214.2			306.1							
GENERAL UNIT																		
Dry cycle	s	5.0																
Oil pump motor	kW	60																
Max. system pressure	psi	2538																
	MPa	17.5																
Oil tank capacity	gal	92.47																
	L	350																
Machine weight	lb	162522	163624	167151	168716													

FF1510-N Machine Dimensions

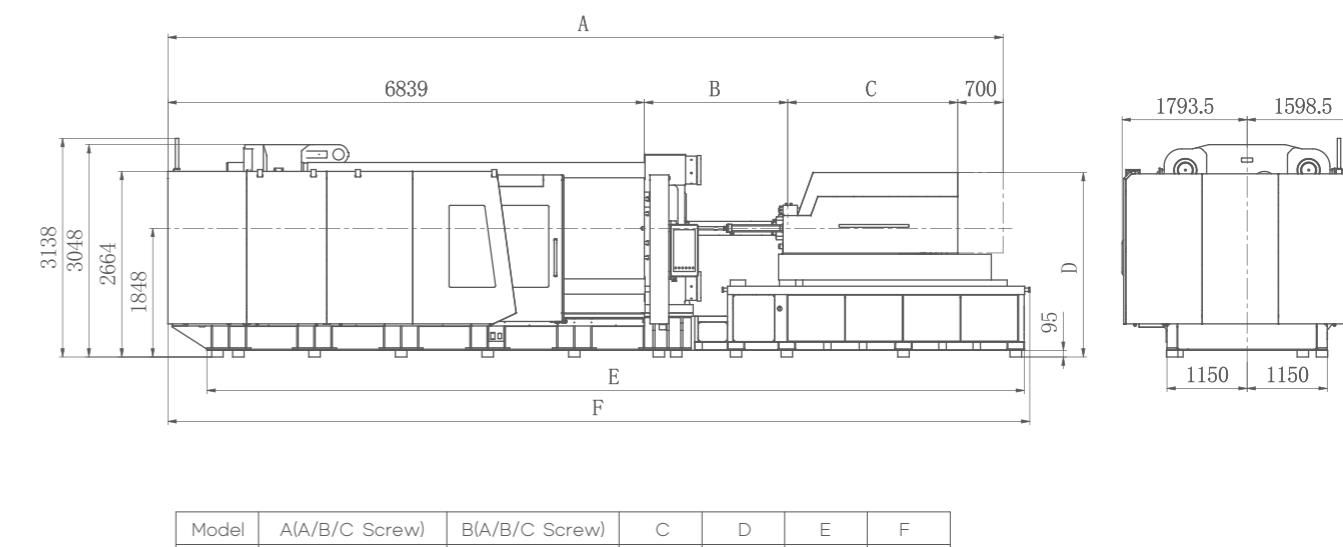

FF1510-N Platen Dimensions

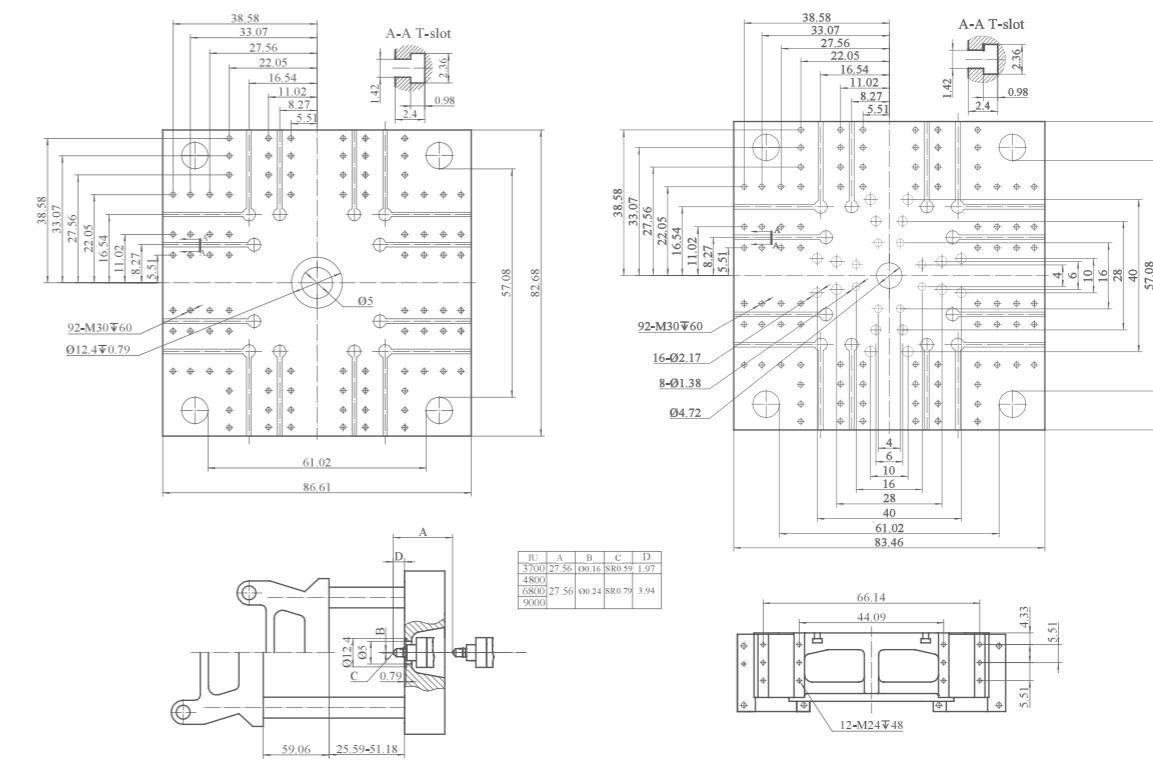

※The Data above were acquired by testing in the factory, only for your reference.

Standard Features

Control and monitoring unit	
• 480v/3pH/60Hz	• Metric and English unit conversions
• Highly sensitive 12-inch color touchscreen display	• I/O check display function
• Memory of molding conditions (over 500 items)	• Printer interface (USB 17)
• 1 set of standard USB interface on the operation panel	• Cycle time monitoring
• Multiple language (Chinese and English)	• Production management
• Real-time display of injection molding data (200 items displayed; 5000 items saved)	• PDP data and charts
• Operation modification record	• Injection quality check
• Alarm record	• Cycle counter
• Electrical control circuit for simple robot	• Molding temperature monitoring
	• Tri-color alarm light
	• Alarm buzzer
	• Low-pressure mold protection curve checking
	• Injection pressure protection
	• Defect alert and handling
	• Real-time display of injection and plasticizing servo motion curves
	• Display of actual value
	• Malfunction handling option selection
	• Product quality monitoring
	• Curves of mold opening/closing and ejector
	• Injection processing curve monitoring

Clamping unit	
• 5-stage mold opening and closing control	• Low speed, low pressure mold opening / closing in mold adjustment mode
• Needle valve/Spure functions (4 sets)	• Embedded dual-size locating ring design (fixed platen)
• Multi-stage ejector forward	• Ejection inside the mold (gate cutting inside the mold)
• Ejector backward delay time monitoring	• Mold opening during ejector backward
• Automatic mold height adjustment	• Ejector backward in place confirmation
• Spure timing control	• Ejector motion selection (4 modes)
• Curves of mold open/close and ejector	• 3-stage ejector control
• Platen with T-slot and mold mounting holes	• Ejector motion delay
• Low pressure mold protection (Ai highly-sensitive mold protection)	• Mold cooling water distributor

Plasticizing and injection unit	
• Injection safety device (Test switch)	• Holding pressure switching (6 modes)
• 5-stage injection control (pressure, speed, position)	• Injection speed response setting (High, medium, low)
• 3-stage holding pressure control (pressure, speed, time)	• Mold opening during plasticizing
• 3-stage plasticizing control (back pressure, speed, position)	• Molding temperature closed-loop control
• Suck-back control (pre-suckback and post-suckback)	• Temperature holding
• Injection delay function	• Temperature optimization
• Pre-plasticizing delay	• Synchronized temperature rise
	• Appointed temperature rise
	• Remaining resin prevention
	• Screw cold start prevention
	• Automatic material purge
	• Calibration of injection pressure zero point
	• Real-time display of plasticizing speed
	• Real-time display of plasticizing back pressure
	• Injection unit shift settings (switch check, shift time)
	• High-force nozzle contact device (configurable)
	• Nozzle center alignment adjusting device

Other features	
• Color of FF series electric injection molding machine	• Hopper sliding device
• Closed safety door	• Common tool kits and spare parts
• Adjustable vibration-damping wedge mount	

Optional Features

Control and monitoring units		
• EU12 electrical interface for robot	• External transformer	• Electrical interface for mold cavity pressure check
• EU67 electrical interface for robot	• Electrical interface for product sorting device	• Mold temperature display and control
• Additional languages	• Electrical interface for gas assisted injection	• OPC UA/DA
• Cooling water circuit	• Heater burnout detection	• EU 73 electrical interface

Clamping unit		
• Various locating rings	• Mold thermal insulation plate	• Mold slide protection
• Core unscrewing device	• Glass-tube cooling water flowmeter	• Injection compression (clamping synchronized with injection)
• Needle valve/spure device	• Pneumatic ejector	
• Air blast device	• Pneumatic core puller device	
• Product chute	• Increased Maximum daylight	

Plasticizing and injection unit		
• Dedicated barrel unit	• Barrel heat-retaining energy-saving device	• High capacity injection nozzle heating band
• Extended nozzle	• Ceramic heater band	• Customized nozzle head
• Spring shut-off nozzle	• Mold internal pressure V/P switching	
• Core puller/unsgrew function (2 sets of electrical interfaces)	• Needle valve pneumatic injection nozzle	

Other features	
• Hopper sliding device (on wheels)	• Vacuum air extractor
• Barrel heat-retaining energy-saving device	• Quality control sorting device
• Auxiliary electrical cabinet	• Integrated multi-stage mold temperature control

※All data on the page comes from YIZUMI factory, please refer to the actual customized equipment;