


HII

180T-900T

HII SERIES COLD CHAMBER DIE CASTING MACHINE

High-performance Product Line Customized for Global Markets

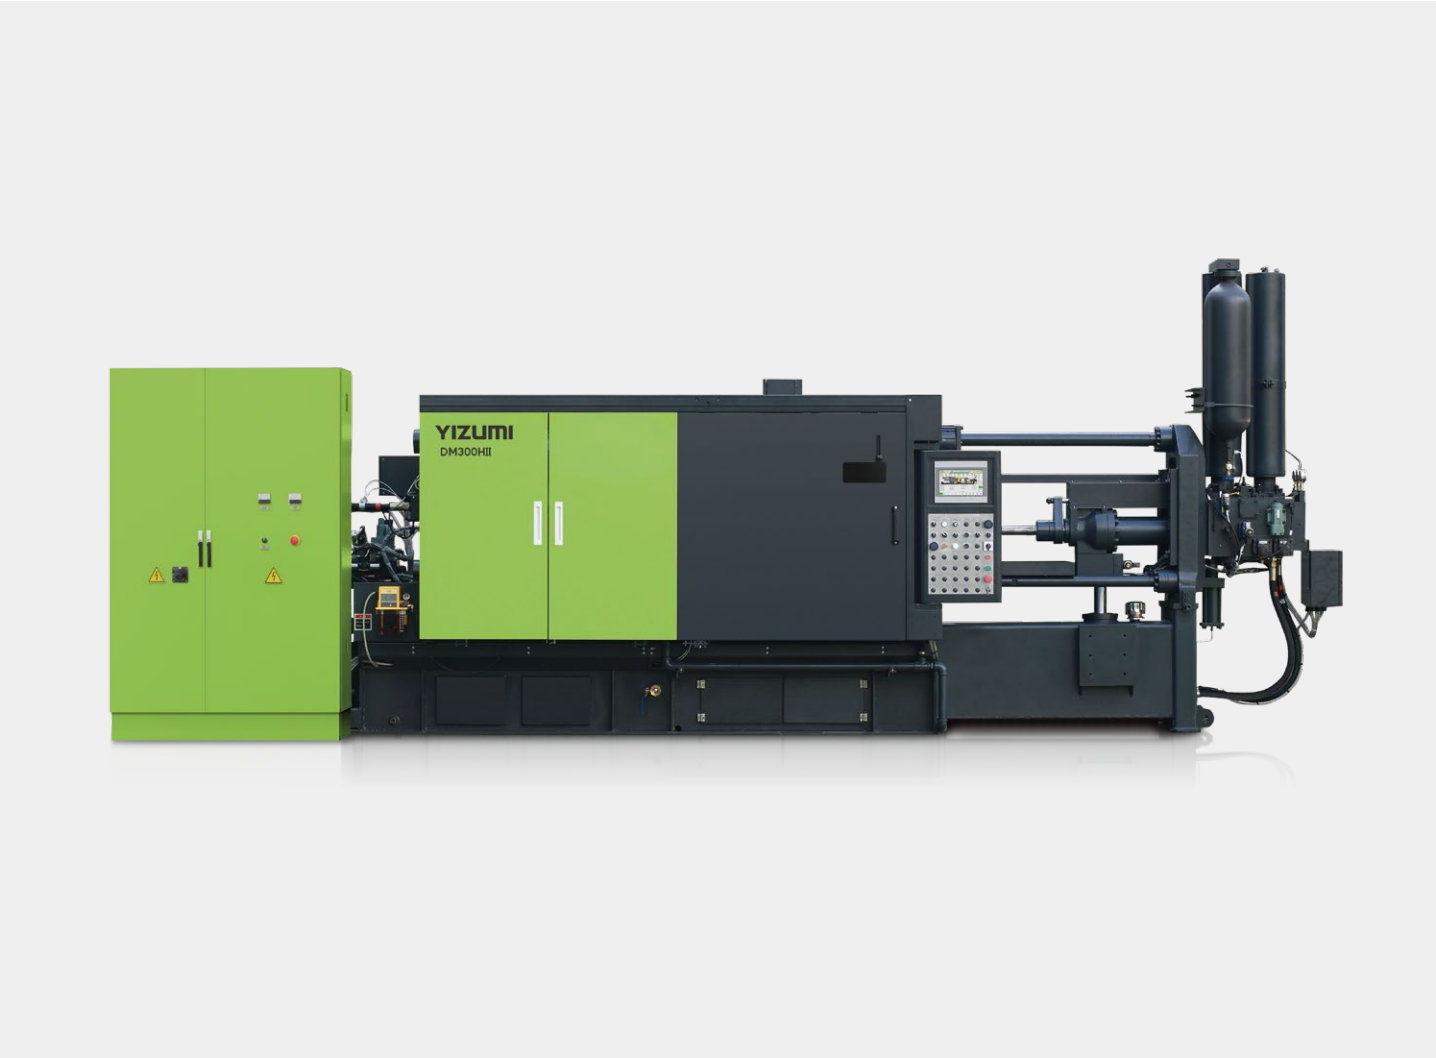

Yizumi International Business Co., Ltd.
Address: No.22-2 Ke Yuan 3rd Road, Shunde, Foshan, Guangdong 528300, China
TEL: 400-802-6888(China) 86-757-2921 9001(Overseas)
Email: dcsolutions@yizumi.com www.yizumi.com

【DISCLAIMER】
[1] YIZUMI reserves the right to modify the product description in the catalogue. Specification might be changed without prior notice.
[2] The picture in the catalogue is for reference only. The real object should be considered as final.
[3] The data in the catalogue is obtained from internal testing in YIZUMI laboratory.
Please refer to the actual machine for the final data. YIZUMI reserves the right of final interpretation upon disputes and ambiguities.




THINK TECH FORWARD

PRODUCT DETAILS

PRODUCT DETAILS

YIZUMI connects with global advanced die-casting technology, introduces famous technology and process experts in die-casting field, and cooperates with local engineer team to integrate international advanced technical knowledge into our new die-casting machines.

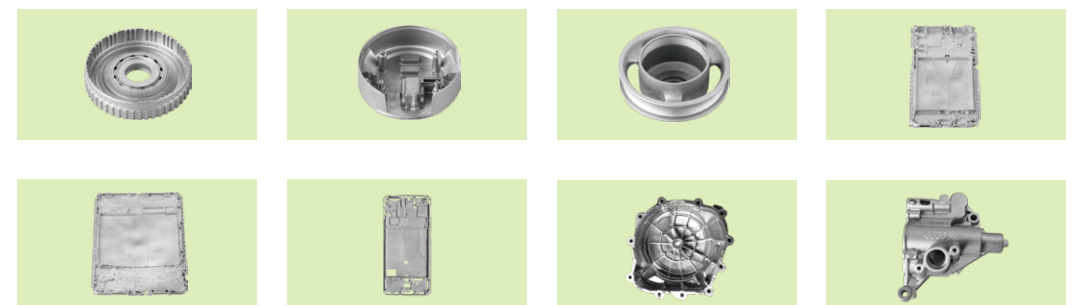

Heritage and Innovation for Our Customers

We at YIZUMI believe that accumulation and integration of technologies generates energy and inspires innovation and creativity. That is why we carefully synthesize century old knowledge of HPM (a YIZUMI brand) and state of the art German machine building technology with the YIZUMI experience of over 12000 die casting machines running worldwide.

This results in top technology solutions which are practical to use and benefit our customers with above- average productivity.

- ★ Guangdong Provincial Government Quality Award
 - ★ Hi-tech Enterprise in Guangdong
 - ★ Forbes Asia's Best Under A Billion 2018
 - ★ One of the first national hi-tech enterprises
 - ★ China Patent Excellence Award 2021
- ★ Key Enterprises of Strategic Emerging Industries in Guangdong Province (in the Field of Intelligent Manufacturing) in 2018
 - ★ Top 500 Enterprises in Guangdong Province in 2019
 - ★ Set up Post Doctoral Scientific Research Workstation and Academician Workstation

YIZUMI Germany


YIZUMI Germany was formally established in 2017 as our European R&D center for molding & casting technologies. Proximity to the renowned RWTH Aachen ensures constructive technological exchange on a high level.



Structural Casting Applications

Successful casting of structural applications in German OEM quality specification is one of the examples of the casting technology development done at the YIZUMI Research Center for Die Casting and Metal Molding.

Our customers can rely on Casting Technology solutions by YIZUMI.

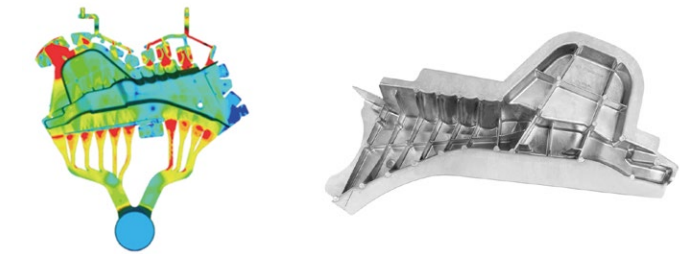


Focused R&D for Best Casting Results

The YIZUMI R&D team, in collaboration with our European experts, have introduced innovations with a clear focus on improved injection capability and performance. The result is an upgrade package providing significantly increased shot control precision and a high injection repeatability. These technological improvements strongly facilitate our customer's high performance manufacturing capability allowing them to successfully compete.

Application field

The HII series high-end cold chamber die casting machine is suitable for manufacturing non-ferrous metal die -casting products such as high-demand automobile and communication parts, high-precision 3C electronic parts, aviation and building materials parts, and household appliances.

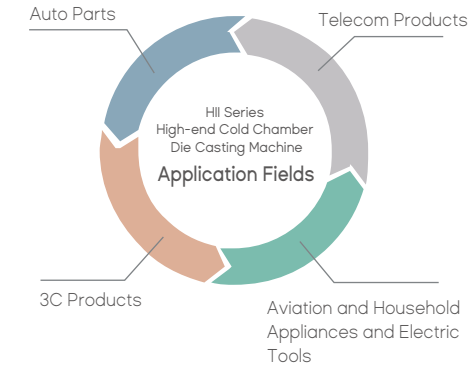

New, integrated Machine Development

HII Series Cold Chamber Die Casting Machine

Precise and stable

Human centric HMI integrated in operation panel increases operational efficiency.

Significantly increased casting precision and a reduced pressure build-up time.

Top line acceleration and international-level process repeatability.

Efficient and durable

Re-engineered toggle system with increased rigidity improves productivity .

Optimized hydraulic drive design shortens cycle time and reduces energy consumption.

Modular machine design with HPM technology input for increased machine stability.

Wide range of application

Improved rigidity and design for every application.

Higher quality standards translate to lower operating cost.

Designed for longer machine service life.

Safe and reliable

Adheres to highest safety standards for our Customers.

Reliable casting production by HMI supported technology data display.

Integrated hydraulic ensures high performance output results.

User-friendly

Integrated easy-to-use machine design.


High quality international hardware components increase machine availability.

Excellent access for maintenance allow easy operation.

Modular design

Individually tested machine modules guarantee highest product quality.


Fully tested modules in inventory allow fast delivery of machines to customer.

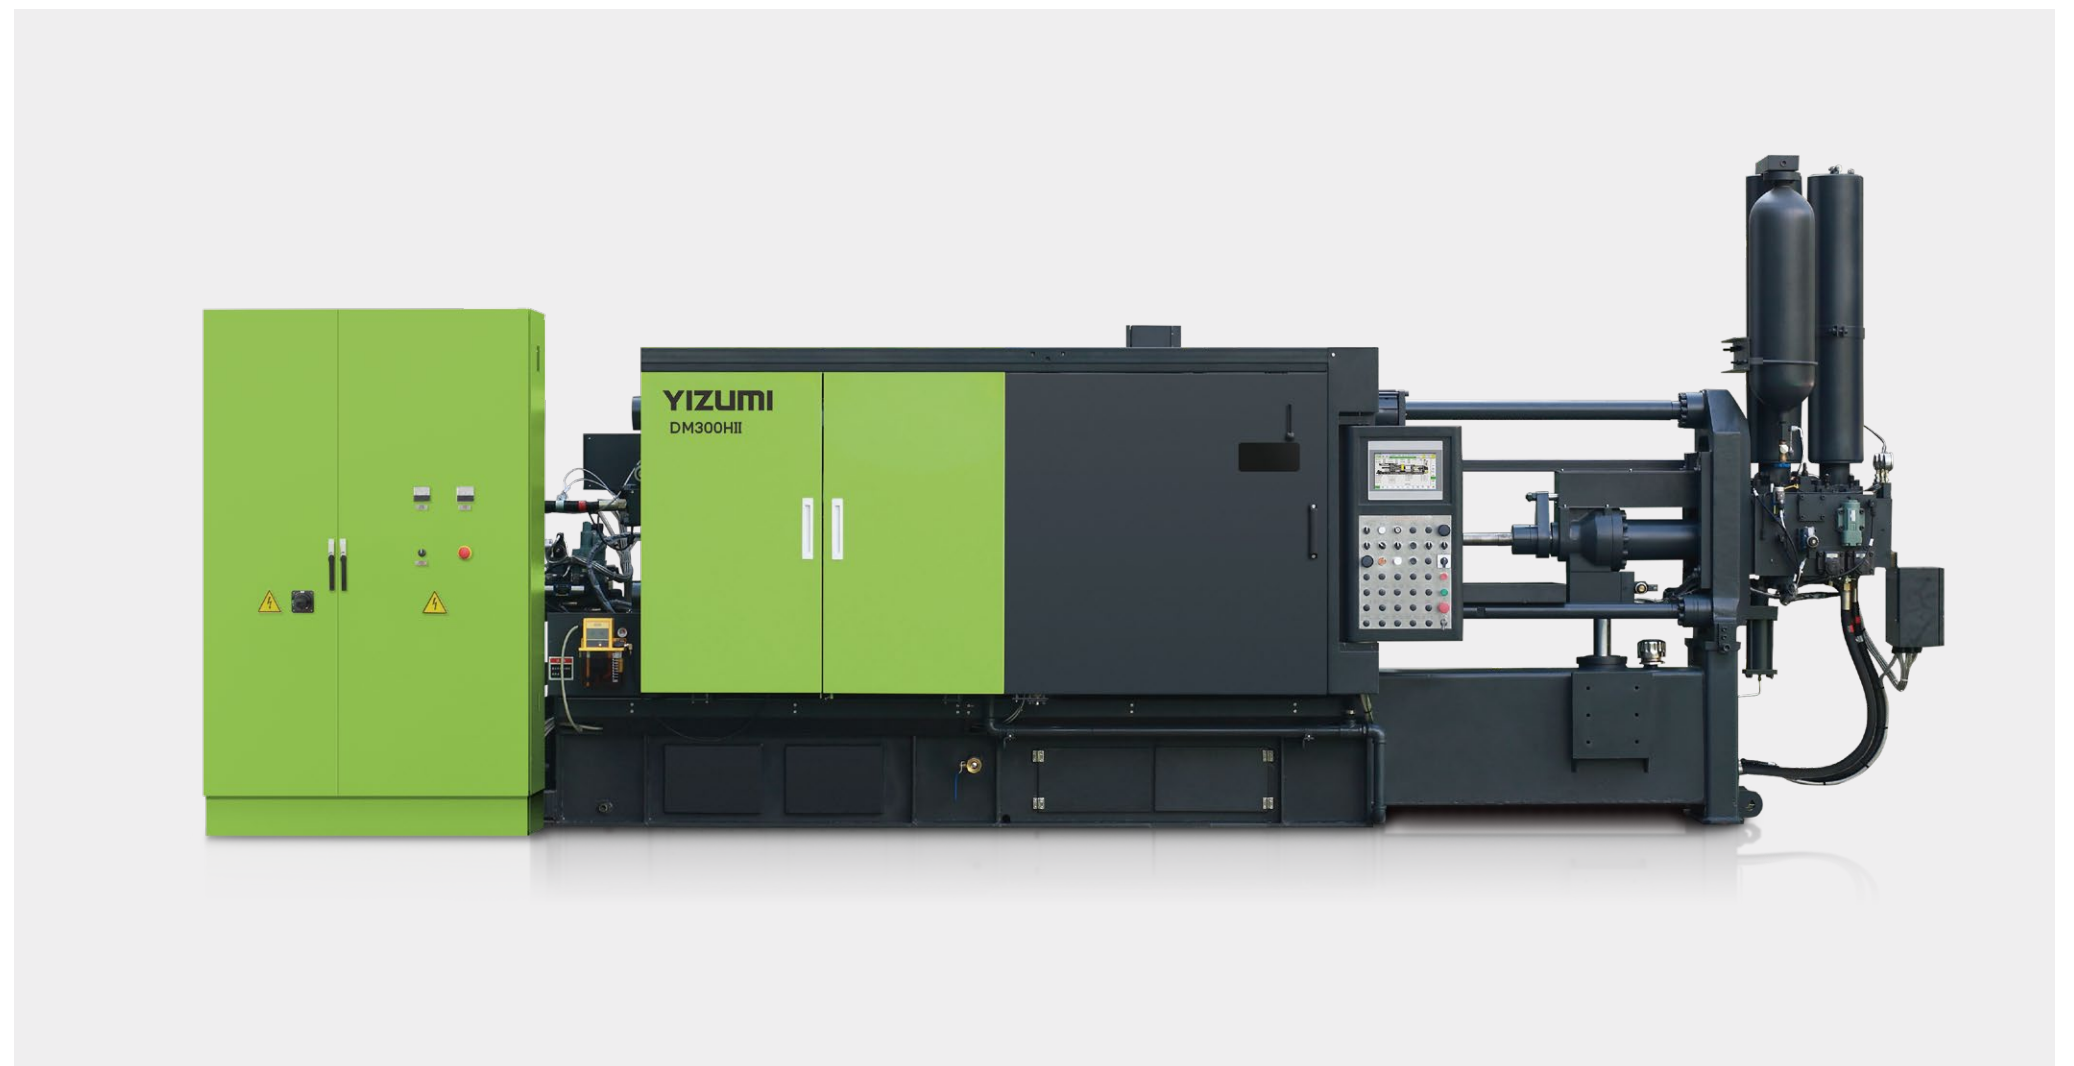

Clamping Unit


Re-Engineered Clamping Unit

Shorter cycle time and increased platen rigidity significantly improve customers production output

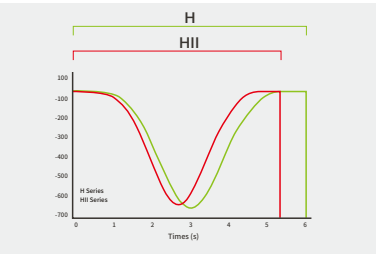


Faster opening and closing velocity

Faster opening and closing velocity of movable platen with optimized platen structure and toggle geometry. Faster cycle time based on finite element systems simulations.

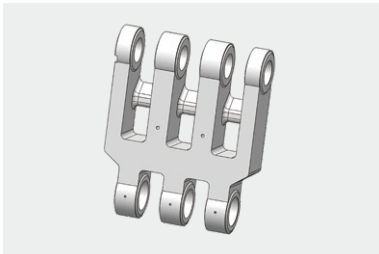


Designed for extended service life

Re-designed toggle geometry based on detailed movement simulations provide improved platen movement characteristics which extend toggle service life and further decrease closing and opening time.

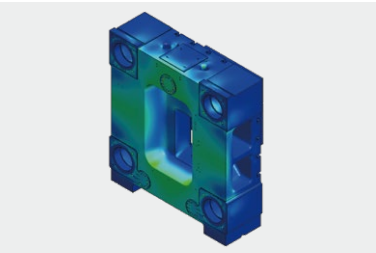

Re-Designed high rigidity platen

Further increased platen rigidity protects the die casting tools during operation. A new design based on FEM analysis offers an even distribution of force by minimized platen bending.

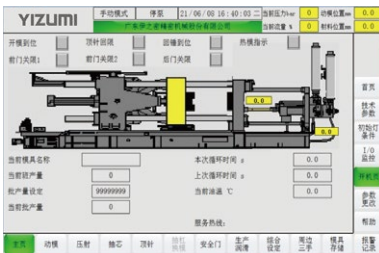


Mold low pressure protection

Optimized closing hydraulic reduces pressure just before die faces meet to protect our customer`s tools for increased die service life.



Safe Operation

Added safety protection of the toggle area by sliding-doors to be opened individually for easy maintenance access.

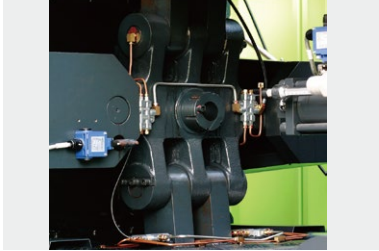



Optimized Toggle Lubrication Design

Improved and centrally located toggle system lubrication and grease system eases operation of the machine so that an extended machine service life is ensured.

* Data above are reference criterions for factory tests.

Upgraded Injection Unit

Increased casting process consistency for our customers based on successful international engineering cooperation.

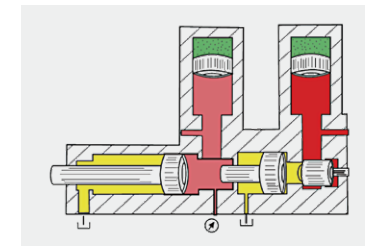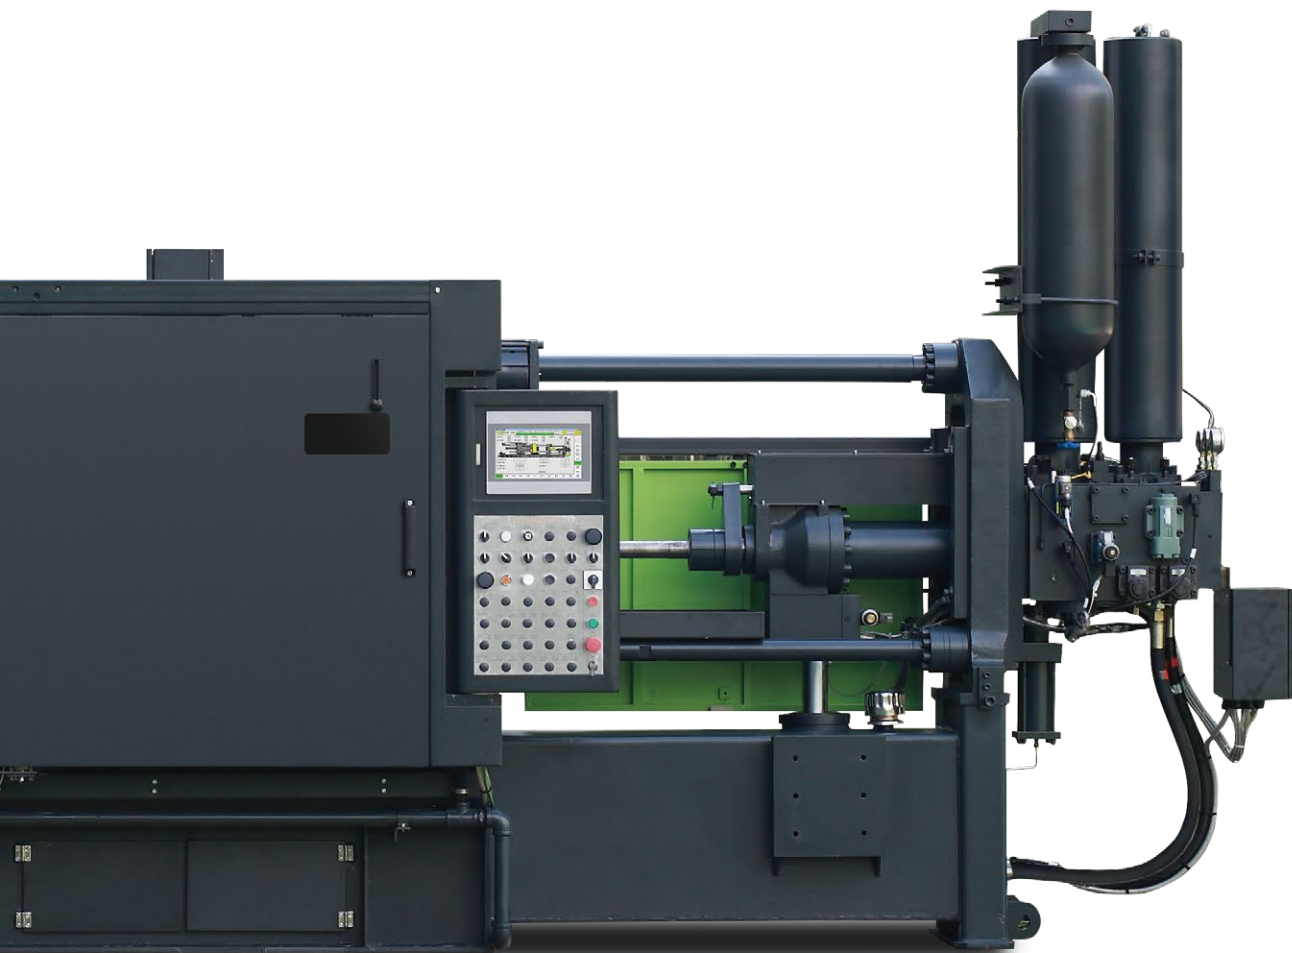

Enhanced shot performance

With its optimized hydraulic system, the HII system offers a high injection acceleration of up to 50G. In combination with its high-capacity P/Q² performance, the HII die casting machine is built to provide high casting quality with even the most difficult parts.

The max. dry injection speed $\geq 8\text{m/s}$ meet customer's high process requirements.




Higher performance injection hydraulic system

A new integrated injection hydraulic adds injection performance to improve casting process stability while reducing components and increasing machine availability.

Precisely triggering the fast-filling phase is critical for many die casting applications. The HII provides a high standard of precision to switchover to the cavity filling phase. The deviation is $\leq 6\text{mm}$. A repeatability of max $\pm 2.5\text{mm}$ which satisfies the highest requirements.

Fast and Precise Hydraulic Drive System

The hydraulic system precisely keeps the balance between energy consumption and efficiency to enable faster cycle times with minimal energy consumption. This effectively increase productivity to meet customers' higher OEE expectations.

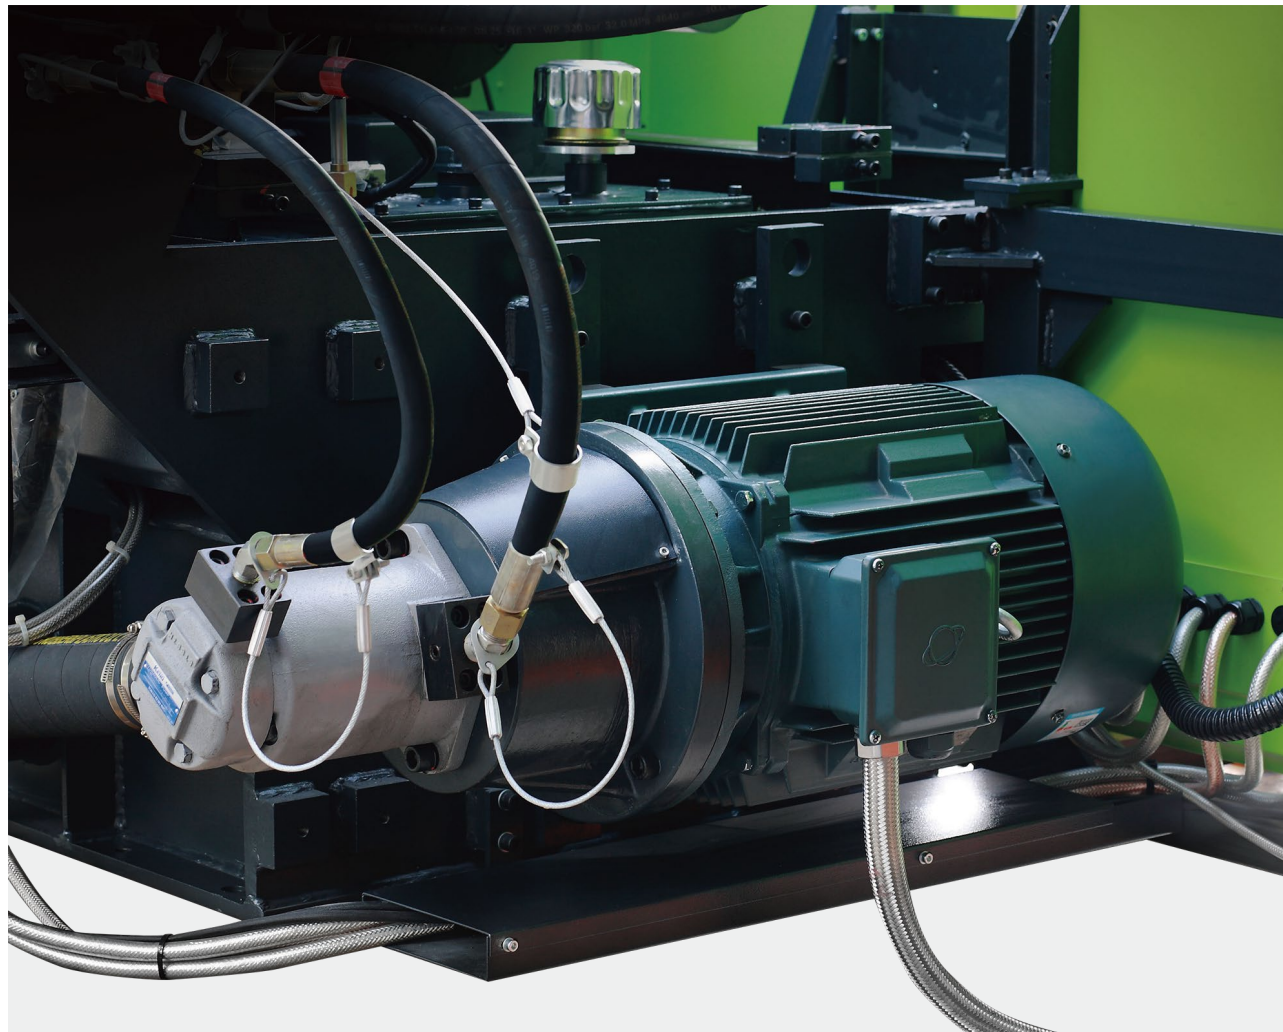


The Third-generation Servo System (Optional)




Less Noise

The third generation servo drive offers even Less noise emissions if compared to the previous design. System noise reduction of about 20%.

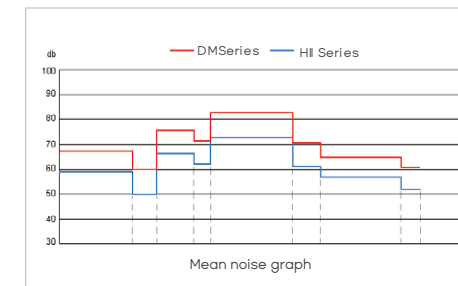


Enhanced Power

Stabilizing power surges automatically for up to 5 mins, this system offers great operational stability even with fluctuating main power.

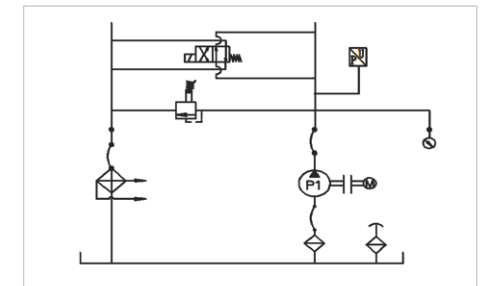


Faster Response Time

Reduced system response time improves reaction time and the highest operational performance.

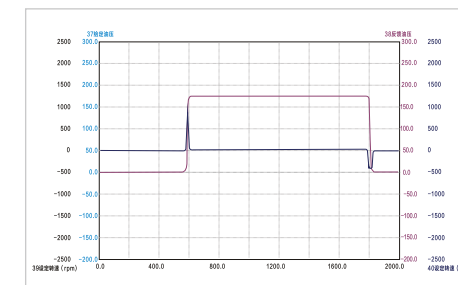

Energy Saving


This efficient servo pump system ensures the lowest possible oil temperatures, further enhancing operational efficiency.

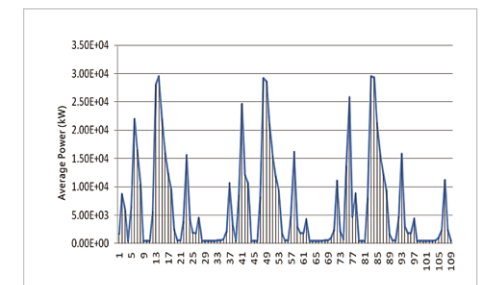

* Data above are reference criterions for factory tests.

International Standard Electrical Control System

High level design complying with worldwide safety standards .

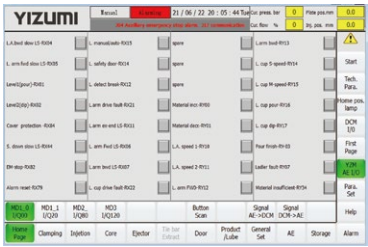

Cell Integration

The Hll control system features standardized interfaces offering great flexibility in the choice of peripherals.
Cell integration made easy.

Temperature Alerts


Automatic pre-warning alarms of fluid levels (hydraulic/lubrication oil) and temperatures hydraulic oil ensure a stable and highly productive operation of YIZUMI equipment.

* Data above are reference criterions for factory tests.




New integrated Operating panel with HMI

The integrated operating panel is easy to use and saves time for the operator as well as the casting process engineers.

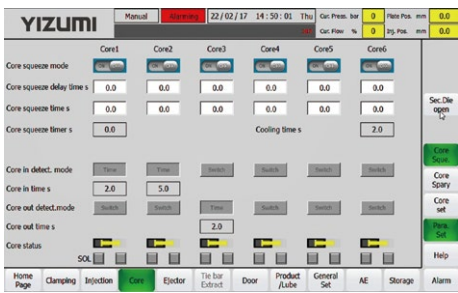


Squeezing function with core puller

Every core pull may be used/programmed as an external squeeze pin. Convenient and flexible programming allows precise application of squeeze pin movements in order to eliminate possible shrinkage porosity in thick walled areas.

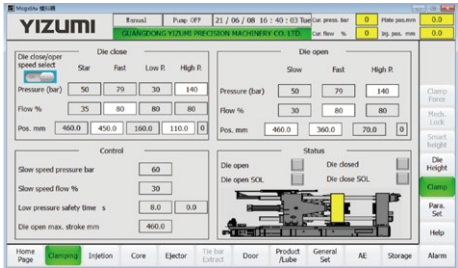

Optimized HMI

Further optimized layout and structure of our HMI increases flexibility in managing machine functions via a large touchscreen.
Intuitive and easy-to-understand maintenance functions such as maintenance tips, comprehensive alarm messages as well as operation guidance increase operational efficiency.
Newly improved functions further include easy 1st phase pre-filling, mold pre-heating and plunger friction detection.

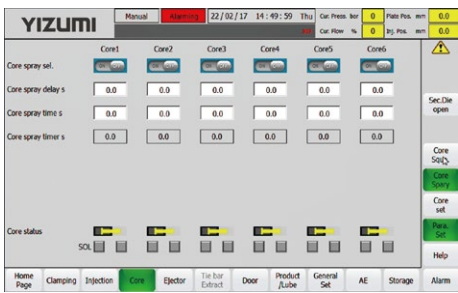


Slides movement controlled by the sprayer

The movement of core pullers were controlled by the spraying unit during spraying process. With this function, all slides could move in/out according to program pre-selected on the sprayer control. Make sure that the die will be completely clean after spraying and blowing, ready for the next shot.

* Data above are reference criterions for factory tests.


Quality Control System (Optional)

Position, Pressure & Speed Curve Display and Intelligent QC Technology

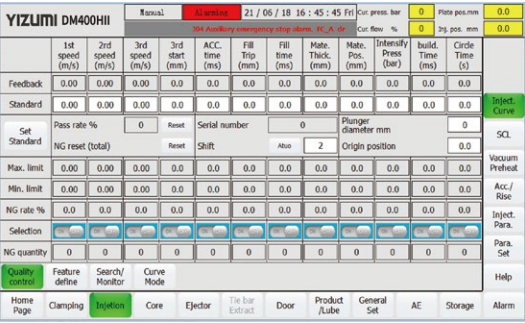


Efficient Process Monitoring

Monitoring casting process consistency in real time allows high process transparency to monitor product quality shot by shot.

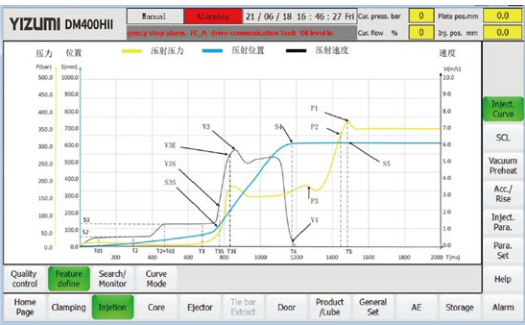

High-precision injection curves are displayed in real time

Through curve adaptation, the operating status of the injection system can be intuitively monitored to ensure product consistency.

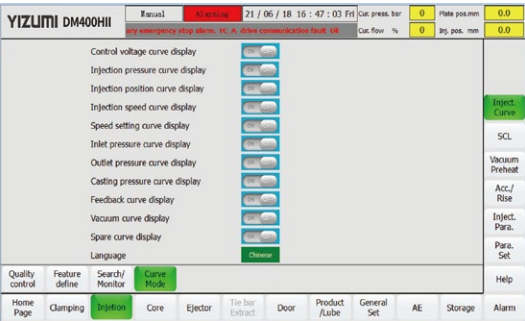

Master Curve Function

Process optimization results in a Master Injection Curve which can be recorded and used as a “good quality” reference curve. Subsequent injection curves are being compared with the master curve adding additional easy-to-read quality monitoring for the process engineer.

Research Center for Die Casting and Metal Molding

YIZUMI Research Center for Die Casting and Metal Molding

YIZUMI has established Research Center for Die Casting and Metal Molding featuring a well equipped with LEAP, NEXT² cold chamber machines, Mg Thixomolding, Al Rheocasting machine cells, covering 840-4400T. The cells are equipped with an aluminum alloy dosing furnace incl. melt treatment with porous plugs, a high vacuum unit, a full set of mold thermoregulator unit (jet cooling, die temperature controller e.g.) and a whole set of robot automation unit. This infrastructure allows YIZUMI Research Center for Die Casting and Metal Molding to meet the production demands of various large castings as well as structural castings.

YIZUMI has created a real customer production environment, and can explore together with customers the core requirements of the die-casting process. Our aim is to provide a better and more satisfying equipment experience. YIZUMI is working towards becoming the most cost-effective solution provider in the die-casting field.

YIZUMI Research Center Die Casting Cell

- Sprayer
- Dosing furnace
- Release agent mixing and feeding device
- Ladler
- Servo sawing device
- Cylinder liner feed device
- Part removal robot
- Safety fence
- Robotic polishing and deburring device
- Air-cooling device
- Conveyor
- Melting and holding furnace
- Water-cooling device
- Vacuum machine
- Mold temperature controller
- Pneumatic deslag device



* Data above are reference criterions for factory tests.

YIZUMI Condition Monitor System (Optional)

The Yi-CMS platform is a perfect addition to YIZUMI's modern die casting machines & cells. Our Yi-CMS provides all functions and connectivity needed to fully integrate YIZUMI cells as well as other machinery in an Industry 4.0 plant manufacturing system.

Machine Monitor

- The running status is viewed in real time
- Dynamic calculation of operational metrics
- Alarm information is collected in real time
- Timely warning of abnormal downtime

Process Monitor

- Process parameters are collected in real time
- Timely warning of parameter anomalies
- Historical processing parameters are traced
- Process parameters SPC control

Production Statistics

- Production progress monitoring
- Quality statistical analysis
- Hourly production statistics
- KPI exception alert




Die Casting Cell Solution

Efficient Cell Integration based on standardized Interfaces

YIZUMI's smart cell integration concept allows great flexibility in the choice of peripheral units. Engineering services include die casting machine, peripherals, after casting processes, color coded energy lines as well as complete safety concept's all in a professional solution with short delivery time.

- Standardized interfaces allow the configuration of efficient die casting cells.
- With a large variety of peripheral units according to customer preferences.
- Solutions include fully integrated ladle, spray and extractor or the use of any brand of peripheral.
- The YIZUMI Technical Services Team will work out the best solution for every customer.

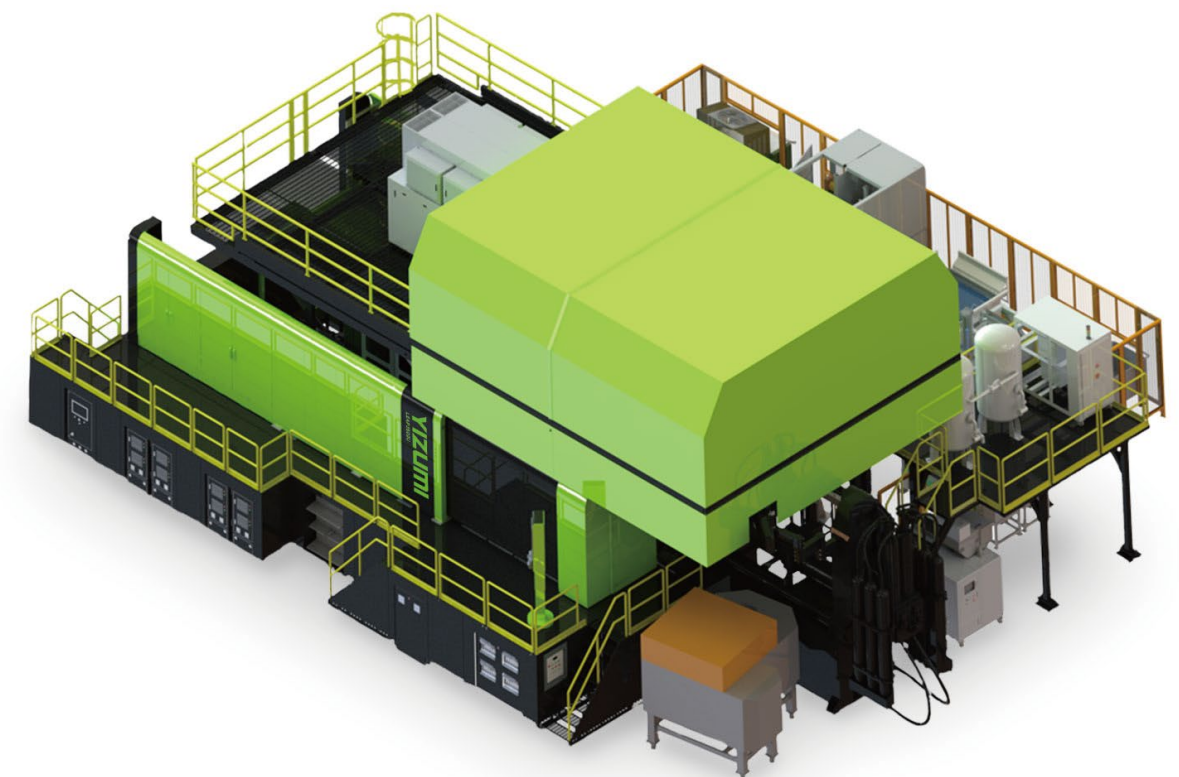

Technical Data

ITEMS	UNIT	DM180HII	DM300HII	DM400HII	DM500HII	DM650HII	DM700HII	DM800HII	DM900HII
CLAMPING UNIT									
Locking Force	kN	1800	3000	4000	5000	6500	7000	8000	9000
Locking Stroke	mm	380	460	550	580	670	670	760	760
Space Between Tie Bars	mm	460×460	570×570	650×650	750×750	780×780	850×850	930×930	960×960
Die Height (Min. - Max.)	mm	200-600	250-700	300-750	350-850	350-900	350-900	400-950	400-950
Ejector Force	kN	105	150	180	240	300	300	360	360
Ejector Stroke	mm	90	110	130	140	150	150	180	180
INJECTION UNIT									
Injection Force	kN	280	330	410	480	600	600	700	775
Injection Stroke	mm	350	410	510	580	650	650	760	760
Plunger Diameter	mm	50,60	50,60,70	60,70,80	70,80,90	70,80,90	70,80,90	80,90,100	80,90,100
Injection Weight (Al)	kg	1.2,1.8	1.5,2.1,2.9	2.7,3.6,4.8	4.1,5.4,6.9	4.6,6.1,7.7	4.6,6.1,7.7	7.1,9.0,11.1	7.1,9.0,11.1
Casting Pressure (intensifg.)	MPa	142,99	168,116,85	145,106,81	124,95,75	155,119,94	155,119,94	139,110,89	154,121,98
Casting Area	cm²	125,180	178,255,349	275,375,490	400,523,662	415,544,688	448,586,742	574,725,897	583,738,910
Max. Casting Area (40MPa)	cm²	450	750	1000	1250	1625	1750	2000	2250
Injection Position	mm	0,-140	0,-125	0,-175	0,-220	0,-250	0,-250	0,-250	0,-250
Plunger Penetration	mm	130	155	210	250	280	280	300	300
Casting Flange Diameter	mm	110	120	130	150	165	165	200	200
Casting Flange Protrusion	mm	10	15	15	15	15	15	20	20
OTHER									
Motor Capacity	kW	15	22	30	37	37	37	45	45
Motor Capacity (SM)	kW	22	31.4	31.4	56.5	56.5	56.5	66.3	66.3
System Working Pressure	MPa	16	16	16	16	16	16	16	16
Oil Tank Capacity	L	450	600	800	1000	1000	1000	1200	1350
Machine Dimension (LxWxH)	mm	6050×1900×2600	6550×1990×2650	7350×2090×2750	7800×2280×2900	8300×2300×2910	8300×2300×2950	9150×2500×3000	9200×2550×3100

* Data above are reference criterions for factory tests.

Remark : We reserve the right to make any product improvement or specifications change without prior notice.
Any product photos shown in catalogue are for future reference only.

Standard and Optional Features

ITEMS	DM180HII	DM300HII	DM400HII	DM500HII	DM650HII	DM700HII	DM800HII	DM900HII
General								
Machine standard color*	●	●	●	●	●	●	●	●
Manual safety door - left	●	●	●	●	●	●	●	●
Manual safety door - right	●	●	●	●	●	●	●	●
Electrical safety door - left	○	○	○	○	○	○	○	○
Electrical safety door - right	○	○	○	○	○	○	○	○
Toggle cover (left + right + top)	●	●	●	●	●	●	●	●
Injection cover	○	○	○	○	○	○	○	○
Electrical System								
PLC control system	●	●	●	●	●	●	●	●
10" touch screen	●	●	●	●	●	●	●	●
Clamping System								
Stroke control - Lineal transducer	●	●	●	●	●	●	●	●
DDC system	●	●	●	●	●	●	●	●
Die height adjustment - manual	●	●	●	●	●	●	●	●
Locking force display	○	○	○	○	○	○	○	○
Hydraulic tie bar extraction	—	—	○	○	○	○	○	○
Hydraulic System								
Standard motor system	●	●	●	●	●	●	●	●
Servo motor system	○	○	○	○	○	○	○	○
Core and Ejector								
Movable core- 1 set	●	●	—	—	—	—	—	—
Movable core- 2 sets	○	○	●	●	●	●	●	●
Fix core- 1 set	○	○	○	—	—	—	—	—
Fix core- 2 sets	○	○	○	●	●	●	●	●
Squeezing function for core puller	●	●	●	●	●	●	●	●
Ejection stroke control - limit switch	●	●	●	●	●	●	●	●
Injection System								
Manual control	●	●	●	●	●	●	●	●
Poximity switch	●	●	●	●	●	●	●	●
Stroke control - magnetic tape	○	○	○	○	○	○	○	○
Intelligent PPS curve technology	○	○	○	○	○	○	○	○
Acc. pressure release : manual	○	○	○	○	○	○	○	○
Yi-CastMaster	○	○	○	○	○	○	○	○
Others								
Oil temperature indicator	●	●	●	●	●	●	●	●
Electrical oil temperature alarm	●	●	●	●	●	●	●	●
Electrical oil level alarm	●	●	●	●	●	●	●	●
Plunger lubricator	○	○	○	○	○	○	○	○


*RAL 7021, RAL 2010, RAL 9003, RAL 120 70 75

● Standard feature ○ Optional feature

Platen Dimension Drawings


DM180HII

Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

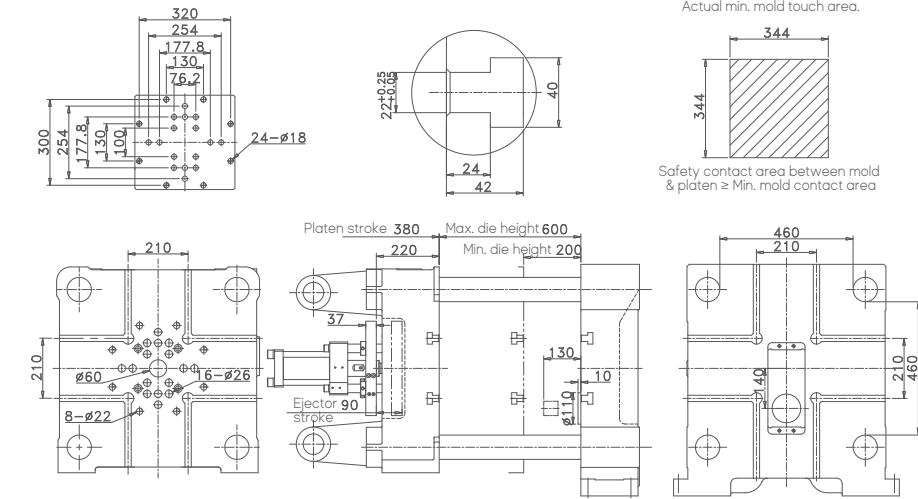


DM300HII

Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

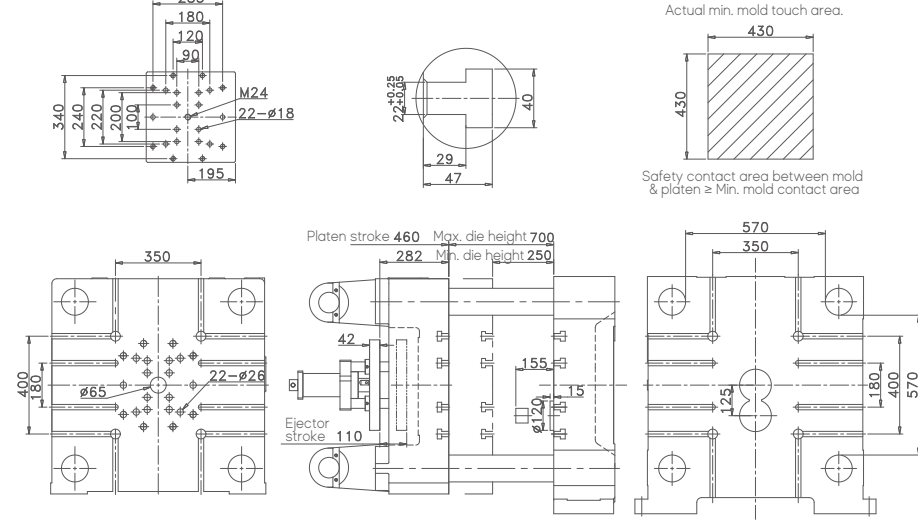

DM400HII


Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

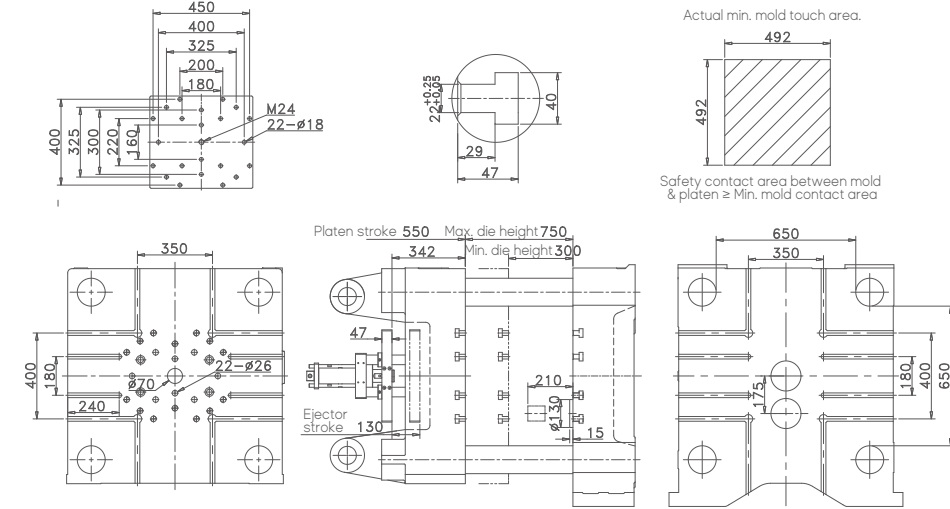

Platen Dimension Drawings


DM500HII

Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

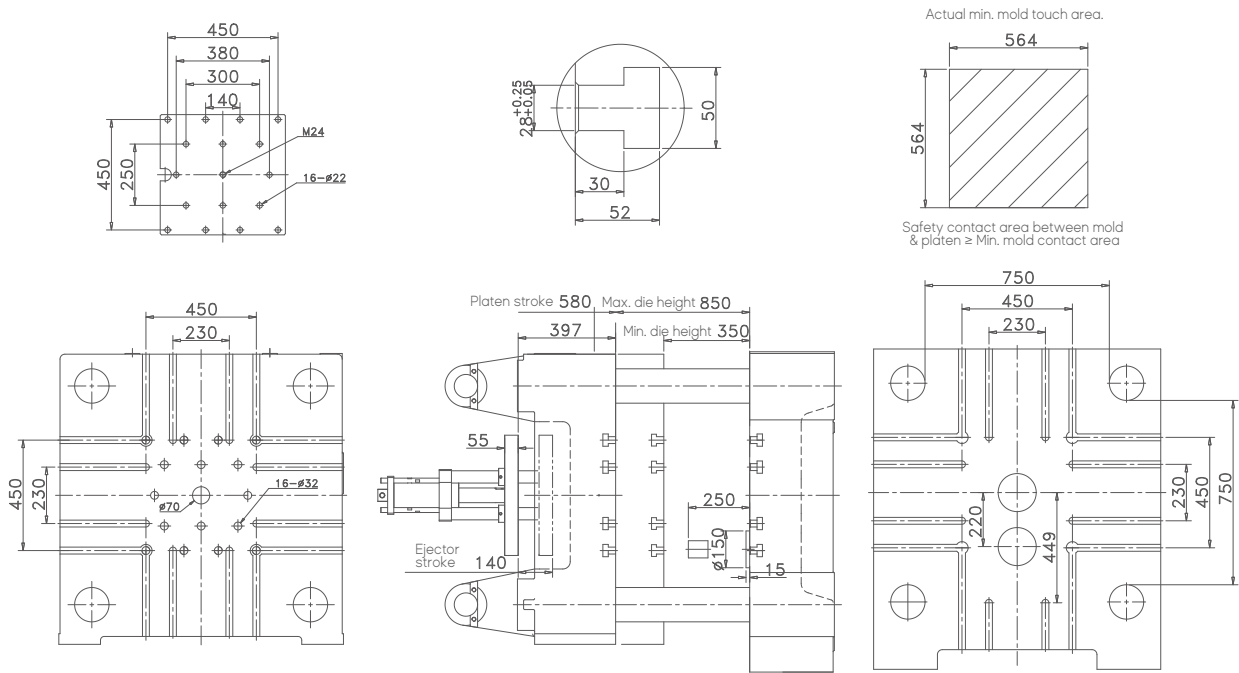


DM800HII

Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

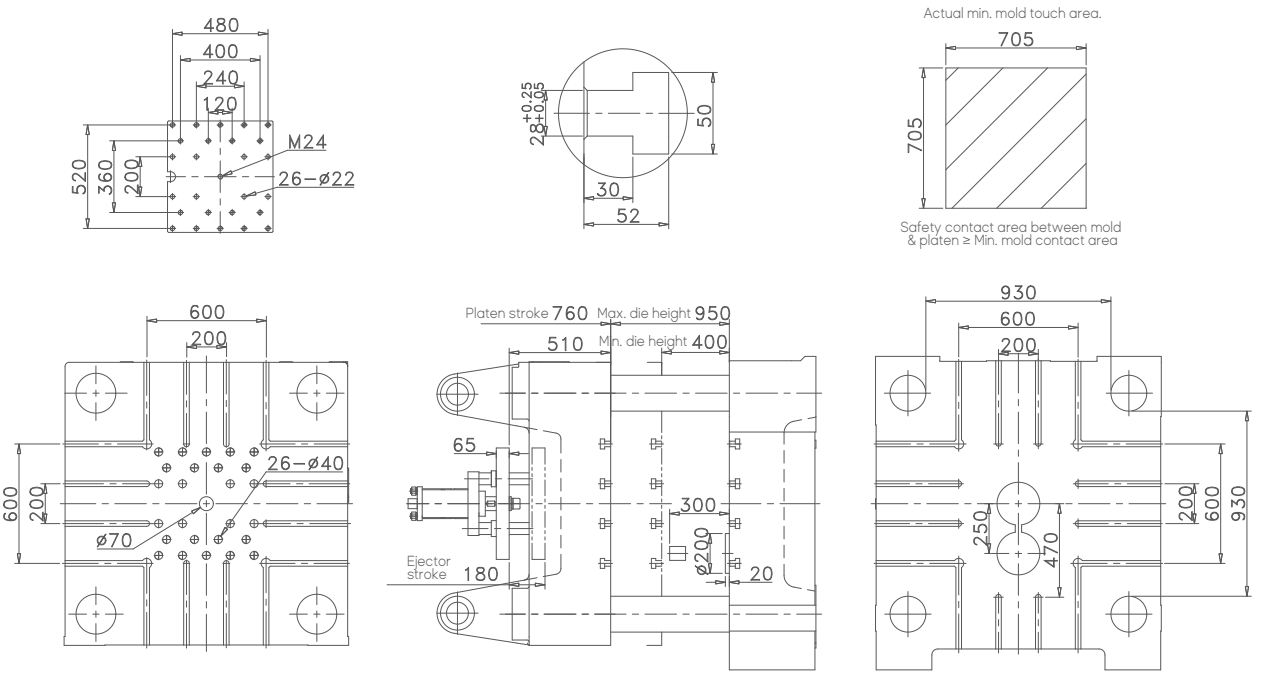

DM650HII

Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

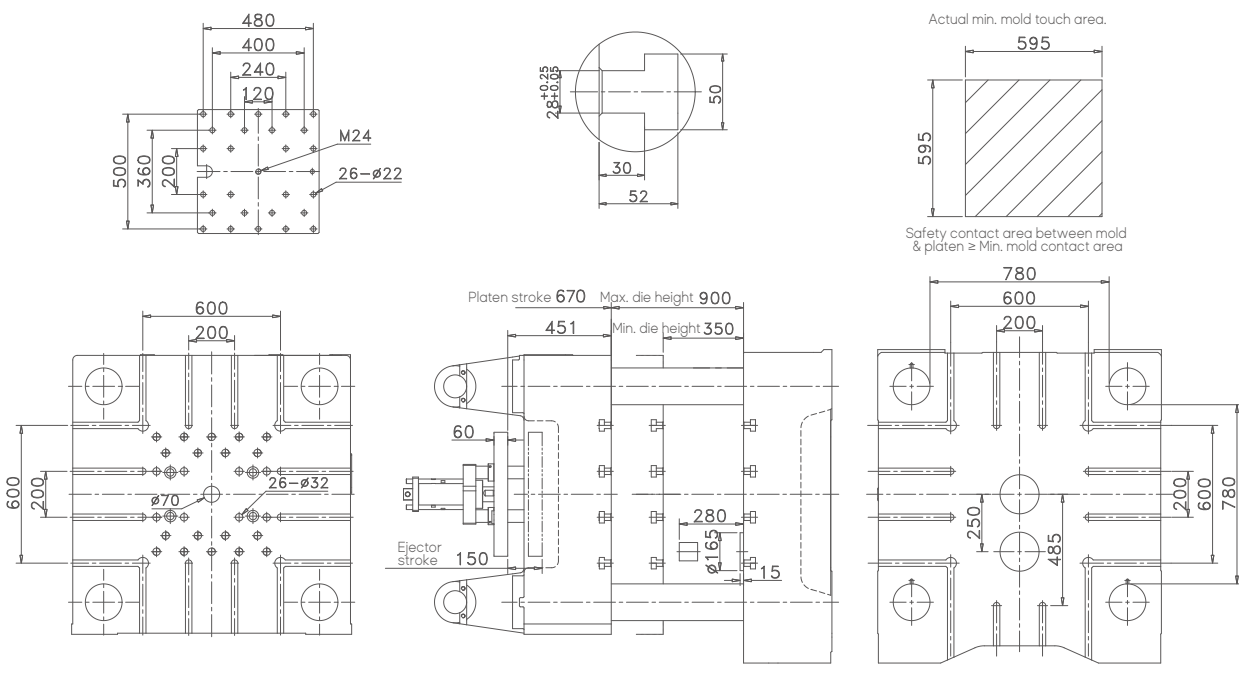

DM900HII

Where marked with , operator can put the ejector push / pull rod from the front or back of the ejector plate, Other holes only from the movable platen and to the rear platen. Mount the ejector push and pull rod symmetrically.

